

As featured on **GRAND** DESIGNS



Retail Brochure 2024

Engineered & Solid Wood Flooring At Manufacturer's Prices

BRITISH MADE



UK Wood Floors specialise in the manufacture of engineered and solid wood flooring for both residential and commercial use direct to trade & public and have over 40 years of installation experience and technical expertise.

Whether supply only or providing a full fitting service, we work closely with our customers to ensure a smooth installation process and unrivalled quality of flooring installation, sanding and finishing. We produce our own flooring and pride ourselves on the ability to ensure quality and value for money throughout the production, supply, fitting and finishing process.

With our bespoke finishing line we have full control of the production process so we can provide almost any specification that you require, be it planks or parquet, all 100% British made!

Please note that whilst our production is exacting at every stage of the process, nature does not conform to requirements. Every wood floor is unique, beautiful and one of a kind. The colour, grain, knots and other markings will vary from samples and from batch to batch. We work with nature, we do not expect it to work for us.





UK Wood Floors Ltd 23 Invincible Road, Farnborough Hampshire GU14 7QU (UK) EN 14342:2013

Two-layer wood flooring elements of oak and birch plywood with grooves and tongues to be glued to substrate The unique identification code of the product type: UKWEF Number of the declaration of characteristics: 1/2020

Wooden floor covering intended for use indoor premises, accordingly to harmonized standard PN-EN 14342+A1.

Reaction to fire, linked with: The minimum mean density The minimum overall thickness	D _{fl} -s1 500 kg/m ³ 14 mm
Emission (release) of formaldehyde	E1
Content of pentachlophenol	< 0,016ppm
Thermal conductivity	0,17 W/mK
Biological durability	Class 1


15MM ENGINEERED OAK PLANKS - FACTORY SPECIAL



For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Micro Bevel	T&G	Pre-finished m ²	Additional Treatments m ²			
150mm 190mm 220mm 260mm	Yes	4 Sides	£55.50 £58.50 £62.50 £69.50	Graining + £5.00 Brushing + £2.00			
Telephone 01252 520520 or visit www.ukwoodfloors.co.uk							

20MM ENGINEERED OAK PLANKS - RUSTIC GRADE

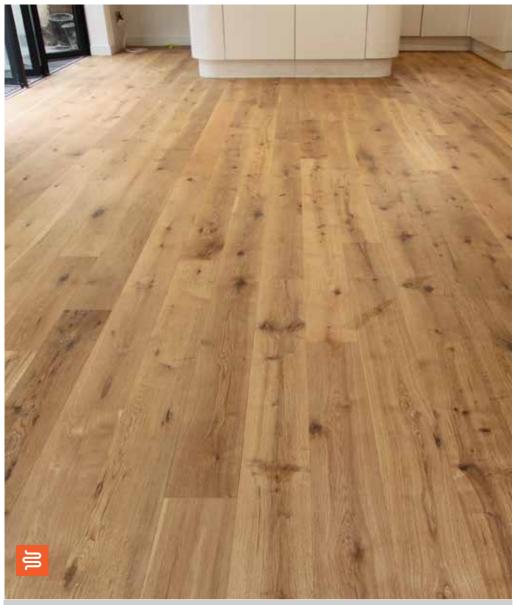

For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width	Micro Bevel	T&G	Pre-finished m ²	Additional Treatments m ²				
190mm 220mm 260mm	Yes	4 Sides	£68.50 £72.50 £79.50	Graining + £5.00 Brushing + £2.00				
Telephone 01252 520520 or visit www.ukwoodfloors.co.uk								

ENGINEERED OAK PLANKS - PRIME A/B GRADE



Width	Micro Bevel	T&G	Pre-finished Stained	Additional	
			15mm	20mm	Treatments m ²
150mm 190mm 220mm	Yes	4 Sides	£81.50 £84.50 £88.50	n/a £98.50 £102.50	Graining + £5.00 Brushing + £2.00

ENGINEERED OAK PLANKS - ANTIQUE RANGE



Our Antique planks are a unique range of hand-finished boards with a bespoke aged appearance.




For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width Mic	Micro Bevel	Micro Bevel T&G	Pre-finished Stained or Hardwax Oiled m ²			
wiath	width with bever	180	15mm	20mm		
150mm 190mm 220mm 260mm	Hand Scraped	4 Sides	£82.50 £85.50 £89.50 £96.50	£97.50 £100.50 £104.50 £111.50		

ENGINEERED BANDSAWN FLOORING RANGE

A distinctive range of cross-sawn oak planks providing a striking textured look and feel, finished with your choice from our wide range of bespoke colours.

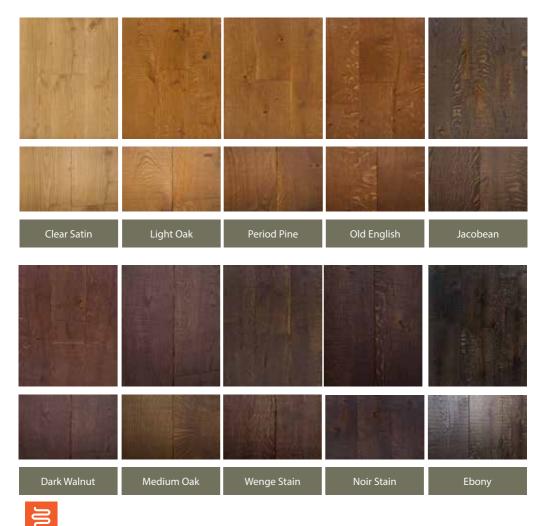

For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Width Micro Bevel	Micro Povol	T&G	Pre-finished Stained or	Hardwax Oiled m ²		
	180	15mm	20mm			
150mm 190mm 220mm 260mm	Hand Scraped	4 Sides	£82.50 £85.50 £89.50 £96.50	£97.50 £100.50 £104.50 £111.50		
Telephone 01252 520520 or visit www.ukwoodfloors.co.uk						

BESPOKE FINISHES AVAILABLE ON OUR FLOORING



PLEASE NOTE THAT WOOD IS A NATURAL PRODUCT WITH VARIATIONS IN GRAIN, SAP CONTENT, COLOUR TONE AND TEXTURE. THESE PHOTOGRAPHS & SAMPLES SHOULD ONLY BE TAKEN AS A GUIDE TO THE FINAL PRODUCT. ALL STAINS ARE FINISHED WITH CLEAR HARDWAX OIL. REPEAT ORDERS PRODUCED AT DIFFERENT TIMES CAN VARY SUBSTANTIALLY.


BESPOKE FINISHES AVAILABLE ON OUR FLOORING



PLEASE NOTE THAT WOOD IS A NATURAL PRODUCT WITH VARIATIONS IN GRAIN, SAP CONTENT, COLOUR TONE AND TEXTURE. THESE PHOTOGRAPHS & SAMPLES SHOULD ONLY BE TAKEN AS A GUIDE TO THE FINAL PRODUCT. ALL STAINS ARE FINISHED WITH CLEAR HARDWAX OIL. REPEAT ORDERS PRODUCED AT DIFFERENT TIMES CAN VARY SUBSTANTIALLY.

14MM ENGINEERED PREFINISHED OAK LARGE HERRINGBONE BLOCKS

Oak engineered herringbone blocks come pre-finished in a range of colours. They enable you to create a stunning effect in any room without the need for sanding & finishing in situ. Finishes shown are for guidance, but we recommend to view samples to see the real beauty of this product.

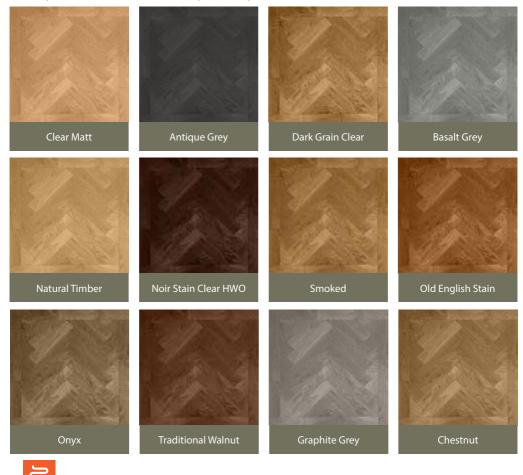

For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Туре	Grade	Thickness	Width	Length	Micro Bevel	T&G	Prefinished Price
Engineered Engineered	Rustic Prime	14mm 14mm	125mm 125mm	600mm 600mm	Yes Yes	4 Sides 4 Sides	£68.50 £76.50
9	Telepho	one 01252 5	520520 o	r visit www	v.ukwoodfloo	rs.co.uk	

15MM ENGINEERED PREFINISHED OAK HERRINGBONE BLOCKS

Oak engineered herringbone blocks come pre-finished in a range of colours. They enable you to create a stunning effect in any room without the need for sanding & finishing in situ. Finishes shown are for guidance, but we recommend to view samples to see the real beauty of this product.






For all other widths and species please enquire for availability. See pages 7 and 8 for available finishes

Туре	Grade	Thickness	Width	Length	Micro Bevel	T&G	Prefinished Price
Engineered Engineered	Rustic Prime	15mm 15mm	90mm 90mm	400mm 400mm	Yes Yes	4 Sides 4 Sides	£74.50 £84.50
	Telephor	e 01252 520)520 or \	visit www.uk	woodfloor	s.co.uk	10

ENGINEERED PREFINISHED ANTIQUE OAK HERRINGBONE BLOCKS

Our Antique herringbone blocks are a unique range, hand-finished with a bespoke aged appearance with your choice from our wide range of bespoke colours.



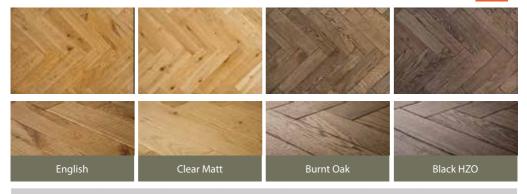


Further details and fitting guidelines available on request. Other finishes available, See pages 7/8

Туре	Thickness	Width	Length	Micro Bevel	T&G	Price
Engineered Engineered	14mm 15mm	125mm 90mm	600mm 400mm	Distressed	4 Sides	£88.50 £94.50

ENGINEERED PREFINISHED BANDSAWN OAK HERRINGBONE BLOCKS

A distinctive range of cross-sawn oak blocks providing a striking textured look and feel, finished with your choice from our wide range of bespoke colours.



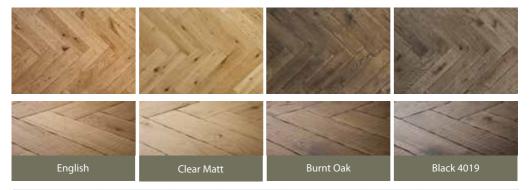

Further details and fitting guidelines available on request. Other finishes available, See pages 7/8

Туре	Thickness	Width	Length	Micro Bevel	T&G	Price		
Engineered Engineered	14mm 15mm	125mm 90mm	600mm 400mm	Yes Yes	4 Sides 4 Sides	£88.50 £94.50		
Telephone 01252 520520 or visit www.ukwoodfloors.co.uk								

ENGINEERED OAK HERRINGBONE BLOCKS UNFINISHED



Blocks come unfinished and require sanding and application of oil after installation. Further details and fitting guidelines available on request. **Other sizes available on request.**

Туре	Thickness	Width	Length	Micro Bevel	T&G	Rustic	Prime
Engineered	15mm	70mm	300mm	No	4 Sides	£59.50	£74.50
	Telepho	one 01252 5	520520 or vi	isit www.uk	woodfloors.	co.uk	12

SOLID OAK HERRINGBONE BLOCKS UNFINSHED



Blocks come unfinished and require sanding and application of oil after installation. Further details and fitting guidelines available on request.

Туре	Thickness	Width	Length	Micro Bevel	T&G	Rustic	Prime
Solid	22mm	70mm	280mm	No	4 Sides	£63.50	£78.50
13	Teleph	one 01252 !	520520 or v	visit www.uk	woodfloors	.co.uk	

SOLID OAK PLANKS






Supplied unfinished, Additional treatments available. See pages 7 and 8 for available finishes

TRADE LINE PLANKS

Our Trade Line flooring is a quality rustic grade engineered Oak, at a great price! We produce this in bulk and machine it to 14mm thick, widths of 125mm and 150mm, which still carries a 3mm solid Oak wear layer.

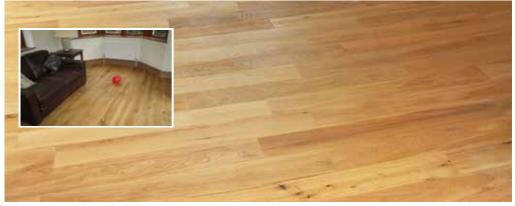

Product	Thickness	Width	Length	Micro Bevel	T&G	Price m ²
Brushed & Lacquered	14mm	125mm	Random	Sides Only	4 Sides	£36.50
Brushed & Lacquered	14mm	150mm	Random	Sides Only	4 Sides	£39.50

TRADE LINE HERRINGBONE BLOCKS

Just like our Trade Line planks, the Herringbone range is made from the same quality rustic grade engineered Oak and the same thickness of 14mm with a 3mm wear layer.



SPC ECO LINE COLLECTION CLICK SYSTEM LUXURY VINYL FLOORING WITH BUILT IN UNDERLAY



SPC ECO LINE

Length	Thickness	Width	Wear Layer	Price
1220mm	5.2mm	181mm	0.3mm	£36.50
Telephone 01252 520520 or visit www.ukwoodfloors.co.uk				

SPC SUPER MATT WL COLLECTION CLICK SYSTEM LUXURY VINYL FLOORING WITH BUILT IN UNDERLAY



SPC SUPER MATT

Length	Thickness	Width	Wear Layer	Price	
1220mm 1800mm	6.5mm	228mm	0.5mm	£39.50	
Telephone 01252 520520 or visit www.ukwoodfloors.co.uk					

SPC XL TITAN COLLECTION CLICK SYSTEM LUXURY VINYL FLOORING WITH BUILT IN UNDERLAY






















SPC XL TITAN

Length	Thickness	Width	Wear Layer	Price
1524mm	6.5mm	228mm	0.5mm	£39.50
	Telephone 012	52 520520 or visit	www.ukwoodfloors.co	.uk 🛛 🛚

SPC HERRINGBONE DESIGNER COLLECTION CLICK SYSTEM LUXURY VINYL FLOORING WITH BUILT IN UNDERLAY



SPC TILE DESIGNER COLLECTION CLICK SYSTEM LUXURY VINYL FLOORING WITH BUILT IN UNDERLAY

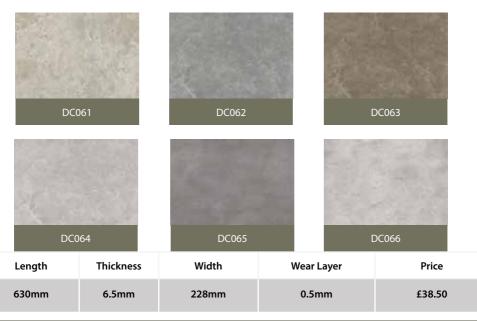

CLICK PLUS COLLECTION CLICK SYSTEM LUXURY VINYL FLOORING WITH BUILT IN UNDERLAY



SOLID OAK MOULDINGS & TRIMS

End Se		unfinished	prefinished
1981	840mm	£29.00	£39.00
	1800mm	£55.00	£65.00
1	2400mm	£81.00	£91.00

T-B 21m		unfinished	prefinished
TO TOTAL	840mm	£29.00	£39.00
TT	1800mm	£55.00	£65.00
1	2400mm	£81.00	£91.00

Flush Ramp		unfinished	prefinished
Actor	840mm	£29.00	£39.00
	1800mm	£55.00	£65.00
	2400mm	£81.00	£91.00

Ran 21m	np ^m	unfinished	prefinished
1.18	840mm	£29.00	£39.00
	1800mm	£55.00	£65.00
	2400mm	£81.00	£91.00

Wood - 21m		unfinished	prefinished
	840mm	£29.00	£39.00
L	1800mm	£55.00	£65.00
	2400mm	£81.00	£91.00

Stair Nosings					
Rounded		unfinished	prefinished		
	1m	£60.00	£90.00		
	2m	£90.00	£120.00		
Square		unfinished	prefinished		
A STATE OF	1m	£60.00	£90.00		
and the second second	2m	£90.00	£120.00		
Flush		unfinished	prefinished		
0111-020	1m	£60.00	£90.00		
11/1 Carton	2m	£90.00	£120.00		

Quadrant	Primed White	Solid Oak
15mm x 2400mm	£14.50	£19.50

Scotia Bead	Primed White	Solid Oak
15mm x 2400mm	£14.50	£19.50

Solid Oak Flat Trim		
Length	2400mm	
per length	£28.00	
<i>—</i>		







Telephone 01252 520520 or visit www.ukwoodfloors.co.uk

Flexible Adhesive



- Ready To Use
- One Component System
- Permanently Elastic
- Suitable For Underfloor Heating
- Solvent & Water Free
- Coverage approx 0.8-1kg/m²

£76.00 13KG



Fastrack DPM

- Single component moisture vapour suppressant
- · For use beneath adhesives when bonding wood flooring
- Coverage approx 5m² per litre provides the necessary 0.2mm thickness

5 Litres £84.50



approx. 12m² (2coats) approx, 30m² (2coats)

600ml £12.75

INFORMATION & INSTALLATION GUIDELINE

By following these guidelines you should ensure the successful installation of your wood flooring, however further consultation may be required as every installation has varying conditions.

The principal enemy of timber floors is excessive exposure to moisture or dryness. Having left our premises, we have no control over the conditions to which they are subjected. Wood is a naturally hydroscopic material and will always be prone to small movement depending on climatic conditions. If suitable care and treatment is not taken, inherent stresses in wood may be released, resulting in movement or distortion such as swelling, warping, splitting or even discolouration. No liability will be accepted when problems are moisture related.

It is very important that the flooring is not installed until site conditions are suitable. Prior to installation moisture and humidity readings should be taken from the area to be fitted. The relative humidity should be between 45% and 60%. The moisture content of the sub-floor should ideally be below 5%. In new buildings, the property should be fully enclosed to outside elements (roof, doors and windows installed). All wet trades (plumbing, platering, painting etc) should be completed and dried out. Recommended acclimatisation period for the wood flooring is 7 days. The flooring should be stacked in piles of 10-15m² or have bearers inserted between packs of flooring to allow for air circulation at ambient room temperature. We strongly advise against storage or installation of wood flooring in buildings with recently plastered or screeded areas.

An engineered plank floor can be laid as a 'floating' floor over an appropriate underlay and glued in t&g with PVA adhesive, or fixed by secret nailing method to a suitable plywood or similar sub-floor, or to joists or battens. On level and dry concrete it can be directly fixed to the floor using an appropriate elasticated polymer adhesive. Engineered boards may initially display a bow when unpacked however this is normal and will be removed during the staggeredjoint laying process.

UNDERFLOOR HEATING

All of our engineered wood flooring is suitable for use over underfloor heating, subject to suitable site conditions, fitting method and adhesives being used. Please note the following important guidelines:

 After the underfloor heating has been commissioned the heating must run for approximately 2 –3 weeks to assist the evaporation of moisture in cement-based sub-floors. Ensure that any patching or leveling of the sub-floor is complete prior to installation. The heating should still be run with other sub-floor compositions such as ply or chipboard.

 Prior to installation moisture and humidity readings should be taken from the area to be fitted (see above for recommended levels). The underfloor heating should be turned off a day beforehand to ensure readings are accurate. Once the sub-floor moisture levels are suitable for installation the heating can be turned on at low level and once installation is complete the heating should then be built up in stages to room temperature over a period of 10 days

AFTER INSTALLATION

It is important to maintain a stable humidity level all year round in order to preserve the wood's form and appearance. Wood is a hydroscopic material and due to its natural movement characteristics, slight cupping or crowning is sometimes unavoidable. The optimal humidity range for hardwood flooring is between 45 and 60%. Temperature should be maintained at about 18 - 24 degrees Celsius. If underfloor heating is used a maximum sub-floor temperature of 26 degrees should be observed. Temperatures in excess of this may cause excessive movement and can lead to delamination of engineered boards and/or splits appearing in the surface of the wood. Gaps appearing between the boards indicate a drying out of the wood and insufficient degree of humidity. Temperature variations can also lead to some 'creaking' being heard from the flooring. The installation of a humidifier or air exchange system can prove indispensable in controlling humidity. Above all, don't forget that wood is a living material and that we must look after it for life. A proper care programme should always be observed. By following these simple guidelines you will maintain the natural beauty of your floor.

(FULL MAINTENANCE INSTRUCTIONS AVALIABLE ON REQUEST)

GRADING & TOLERANCE SPECIFICATIONS

PRIME (AB GRADE) Grain & colour variation, minimal sap, small sound knots allowed, moisture content 8% +/-2%.

<u>RUSTIC (ABCD GRADE)</u> Natural grain & colour variation, contains sap, medullary rays, open knots (filled), surface splits, moisture content 8% +/-2%, grading is mixed so consistency of appearance cannot be guaranteed.

<u>BESPOKE FINISHES</u> Floors finished with a coloured oil or stain can have an uneven appearance due to sap and the grain density in timber and may vary from samples. This should be noted prior to purchase.

<u>TOLERANCES: WIDTHS</u> +/-1mm, Lengths: +/-1mm, Thickness: +/-1mm, Bevel: 0.5mm, Lengths: average lengths of boards cannot be guaranteed.

<u>PLEASE NOTE</u> whilst our production is exacting at every stage of the process, nature does not conform to requirements. Every wood floor is unique, beautiful and one of a kind. The colour, grain, knots and other markings will vary from samples and from batch to batch. We work with nature, we do not expect it to work for us.

DELIVERY Please note that the carriers are contracted to deliver to the entrance of the premises specified. It is the Customers responsibility to ensure that the goods can be delivered to the room of their choice. Any damage to flooring delivered or shortages in quantity should be reported to the Company within 24 hours of delivery. Please do not sign for unchecked unexamined goods. In the unlikely event of goods being damaged in transit, signing in such a way invalidates our insurance and therefore a claim will not be accepted. The Company will use reasonable endeavours to comply with agreed Delivery dates, however the Company will not be liable for any loss due to delay.



23 Invincible Road Farnborough Hampshire GU14 7QU Tel: +44 (0) 1252 520520 Email: info@ukwoodfloors.co.uk Web: www.ukwoodfloors.co.uk

Monday - Thursday	08:30 - 17:00
Friday	08:30 - 16:00
Saturday*	09:00 - 13:00

(We are not open every Saturday, please check website for times)



Payments can be made by Bank Transfer or by debit/credit cards.