

THE ALL NEW
NEXT
GENERATION
AIR CONDITIONERS

AMSTRAD

KHUSHIYON KI SHURUAT

2023

AIR CONDITIONERS RANGE

**GOLD
POWER**



*Dimaag
Use Karo*

*Amstrad
Choose Karo*



THE ALL NEW
NEXT
GENERATION
AIR CONDITIONERS



CUSTOM - BUILT AIR CONDITIONERS

Based on Consumer Insight, we at Amstrad understand that every person has a different need from the air conditioner depending on the region where he/she lives (humidity, temperature and air pollution). Hence, one specification of air conditioner cannot be ideal choice.

For the first time in India, Amstrad has introduced reliable, high quality air conditioners for specific needs and regions. Amstrad offers a wide range of air conditioners from Dr. Ac 2.0 to Silencio AC. From All Season to Smart wi-fi to Energy Saving. Our all new next generation air conditioners are custom built to ensure faster cooling, minimize energy consumption and ensure healthy air. The All Season range provides cooling in summer, humidification in the rainy season and heating in winters.

Amstrad is Inspired by Passion for Perfection to deliver Next Generation – Quality, Service & Technology



AMSTRAD



India's Most Promising Brand



Prestigious Rising Brands Of Asia

World's Leading Brand



Over 7.5 Lakhs consumers have experienced the Amstrad Advantage.
Now is your time.



AMS133DrCMI
AMS205DrCMI



Dr. AC 2.0


Next Generation Pentasane Filtration Technology.

“The Dr. AC comes with inbuilt Air Purifier and Air Steriliser. Keeps the mosquitoes away too.”



ANTI MOSQUITO PROPERTIES

Mosquito repellent in filter to keep you away from Dengue, Malaria and Chikungunya.



PM 2.5 AIR FILTRATION

Removes 99.9% of PM 2.5 particles in the air by electrostatic ion.



ANTI BACTERIAL FILTER

The lysozyme enzyme destroys the peptidoglycan layer of bacterial cell walls & defends against bacterial infections.




ANTI-VIRAL COATING

Protects from Germs, allergen, viruses, fungus, mold and bacterias, keep the environment clean.



PENTASANE FILTRATION TECHNOLOGY

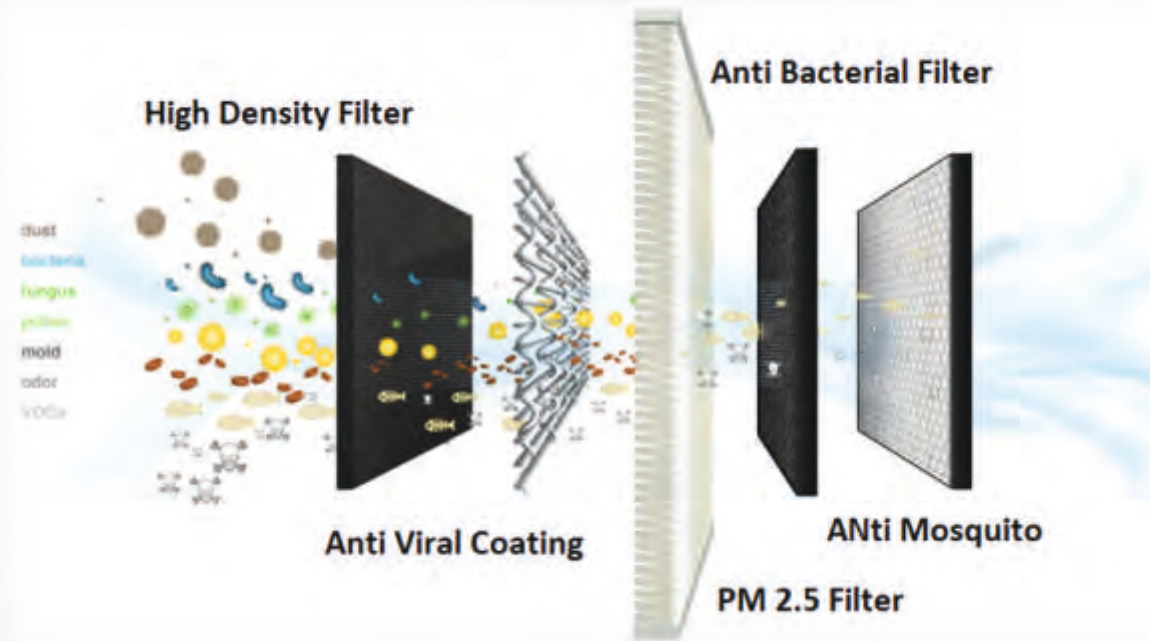


KEY FEATURES



COOLING AT 56 DEGREE AMBIENT

Tested at 56°C to ensure optimum cooling at extreme temperatures with minimum deration in cooling capacity.



OPERATING VOLTAGE RANGE FROM 145V TO 270V

Ensures complete protection from power fluctuations. Ideal for Indian power supply conditions.




WI-FI ENABLED

Virtually control your air conditioners from anywhere outside your home using your smart phone & can be operated by voice control via Google Home/Alexa.



FOUR WAY SWING

The four-way air flow feature allows the air conditioner to evenly spread cool air throughout the room.



HYDRPHOBIC FINS IDU

Prevents the corrosion of heat exchangers and extends the life of Air Conditioner.

SILENCIO 
silent one



AM133SAI
AM133SAICH
AM203SAI
AM203SAICH

Silencio AC

The "Silencio" air conditioner is designed for a peaceful sleep environment, operating at a whisper-quiet 22~24dB* (under test conditions). It provides the next generation of light sleep, ensuring that you can sleep comfortably through the night without any disturbance from the air conditioner.


With its super quiet operation, the "Silencio" air conditioner will give you the peace and quiet you need for a good night's sleep.



Operational even at 52°C ambient

Next Generation C-shaped Efficient Evaporator

- Heat exchange area increased to 15-30%
- Avoids the air reverse blowing which increases 12-25% cooling

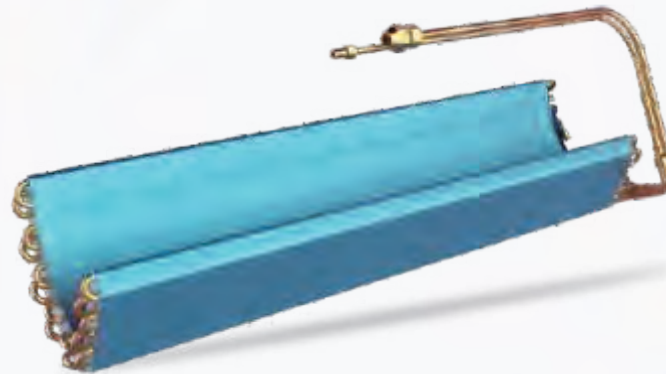

KEY FEATURES



SUPER QUIET AT 22~24 dB*

Super Silent Model capability a low as 24 dB*, for a pleasant sleep




0.1 °C ACCURATE SENSE OF TECHNOLOGY

The fine temperature control capacity increases by 2-5 times than ordinary inverter air conditioner Energy Saving up to 12% (DC-Inverter)




THE NEXT GENERATION OF LIGHT SLEEP

When the high-precision photosensitive device detects that the light is dimmed, the control system automatically divides into 8 stages to gradually dim the display screen and automatically reduces the air flow speed and temperature at the same time.



ECO SELF-CLEANING

The evaporator adopts hydrophilic coating. When the remote controller is turned on for self-cleaning with one key.



GOLDEN FIN, IDU

Prevents the corrosion of heat exchangers and extends the life of Air Conditioner.

SILENCIO 
silent one



AM133SAIHC
AM203SAIHC



Silencio Hot and Cold Series

Amstrad Silencio Hot & Cold Air Conditioners deliver comfortable air temperature throughout summers & winters. It also acts as a dehumidifier during the rainy season.

“Experience the cool of Kashmir in summers and the warmth of Chennai in Winters.”



-5°C TO 52°C COMFORTABLE RUNNING

With the leading two-stage compression (EVI) and cooling system optimization technology and high reliable unit components to ensure the reliable operation even in extreme ambient temperature (heating at -5°C, cooling at 52°C).



KEY FEATURES



HYDROPHILIC CONDENSER

Hydrophilic technology prevents the accumulation of water on the surfaces of the fin. The water droplets slip down without sticking on the surface of the condenser.




HOT & COLD INVERTER TECHNOLOGY

Provides maximum cooling in summers and maximum heating during winters using inverter technology with much lower energy consumption.



AUTO START

Air Conditioner restarts automatically after power resumes, in case of power failure, at the set temperature without any memory loss.



OPERATING VOLTAGE RANGE FROM 145V TO 270V

Ideal for Indian power supply conditions.



AMS135CM
AMS205CM

Megalo Series

The "Megalo" air conditioner is equipped with an Energy Efficient Inverter Compressor and a Dehumidifying Mode, making it a smart choice for your home. This air conditioner saves energy while also improving air quality through its efficient cooling and moisture removal capabilities.

Experience cost-saving comfort with the "Megalo" air conditioner.



**ENERGY EFFICIENT
INVERTER COMPRESSOR**



**DEHUMIDIFYING
MODE**



**JOYSTICK REMOTE
HANDSET**

Ergonomically designed Joystick Remote to control the functions of AC.

WI-FI

The AC can be controlled from anywhere through your smartphone.



KEY FEATURES



WI-FI ENABLED

Virtually control your air conditioners from anywhere outside your home using your smart phone.



BROAD HEAD DESIGN

Bigger area, bigger discharge, bigger cooling



FOUR WAY SWING

The four-way air flow feature allows the air conditioner to evenly spread cool air throughout the room.




ANTI DUST FILTER

Anti dust filter captures and separates the matter and then discharges purified air back into the environment.



100% COPPER EVAPORATOR AND CONDENSER COIL

Better heat transfer, enhances energy efficiency & life of the Air Conditioner.

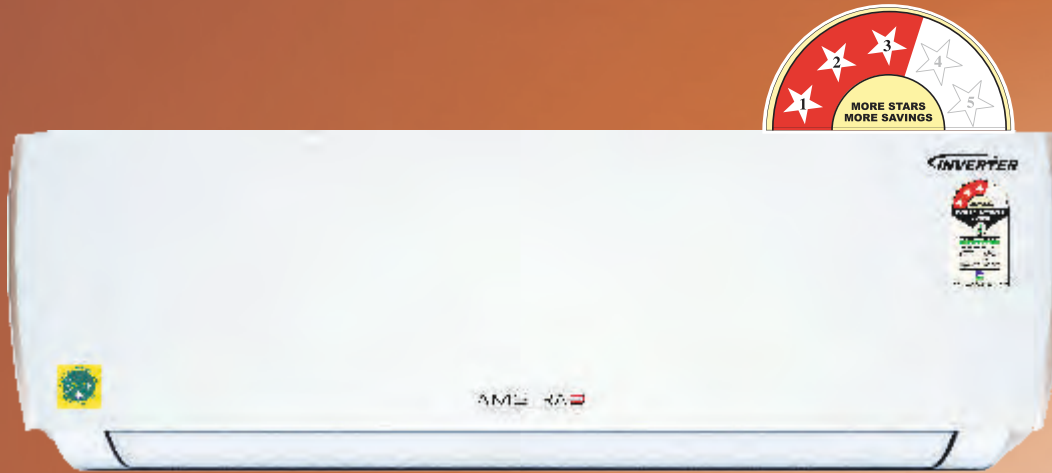

AMS13S3DI
AMS20S3DI



Trio Series

The "Trio Air Suction" air conditioner is designed to provide faster cooling for your home. Its innovative air suction technology allows it to cool the room faster, giving you instant relief from the heat. With its efficient cooling performance, the "Trio Air Suction" air conditioner is the perfect solution for anyone seeking quick and effective relief from the heat.



ENERGY EFFICIENT
INVERTER COMPRESSOR



DEHUMIDIFYING
MODE



NEW INVERTER SYSTEM

The inverter technology helps the compressor operate as per your room temperature.



1Hz Operation



0.1°C Temperature Control




0.3 W Stand by

KEY FEATURES



WI-FI ENABLED

Virtually control your air conditioners from anywhere outside your home using your smart phone.




TRIO AIR SUCTION,

Enables Faster Cooling




TURBO COOLING

For faster cooling and heating.



100% COPPER

Better heat transfer, enhances energy efficiency & life of the Air Conditioner.

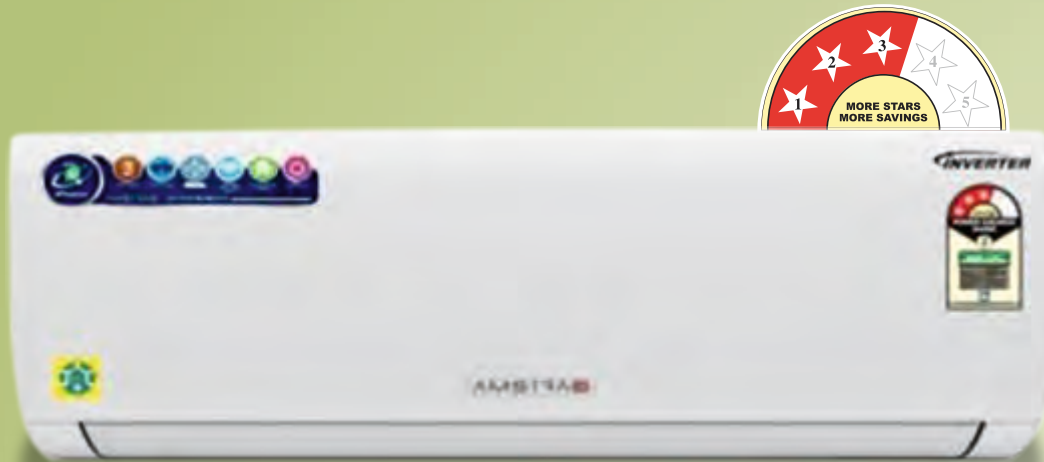

AMS20Gi3
AMS25Gi3



Gi3 Series

The Gi3 Series air conditioner provides comfortable indoor climate while reducing energy consumption and operating costs. This series features an energy efficient Rotary Compressor, which operates smoothly and quietly while consuming less power. The Dehumidifying Mode allows for removal of excess moisture from the air, resulting in a more comfortable indoor environment.

KEY FEATURES



ENERGY EFFICIENT ROTARY COMPRESSOR

It is designed to operate more efficiently, resulting in lower energy consumption and reduced operating costs.



DEHUMIDIFYING MODE

It provides a more comfortable indoor climate, especially in regions with high humidity.



LOW VOLTAGE START UP

It ensures a smooth and stable operation even during voltage fluctuations.



ANTI DUST FILTER

Anti dust filter captures and separates the matter and then discharges purified air back into the environment.





AMS13Mi3

PureAir Series

The PureAir Series with Active carbon filter helps to improve indoor air quality by removing harmful pollutants and unpleasant odours. The filter contains activated carbon, attracts and absorbs impurities such as smoke, allergens, and volatile organic compounds. This results in fresher, cleaner air and a healthier environment for you and your family.

KEY FEATURES



ACTIVE CARBON FILTER

Improves indoor air quality by removing harmful pollutants and unpleasant odours.




FOUR-WAY SWING

The four-way air flow feature allows the air conditioner to evenly spread cool air throughout the room.



ANTI DUST FILTER

Anti dust filter captures and separates the matter and then discharges purified air back into the environment.



100% COPPER EVAPORATOR AND CONDENSER COIL


Better heat transfer, enhances energy efficiency & life of the Air Conditioner.



ECO SERIES



AMS20F2SMT

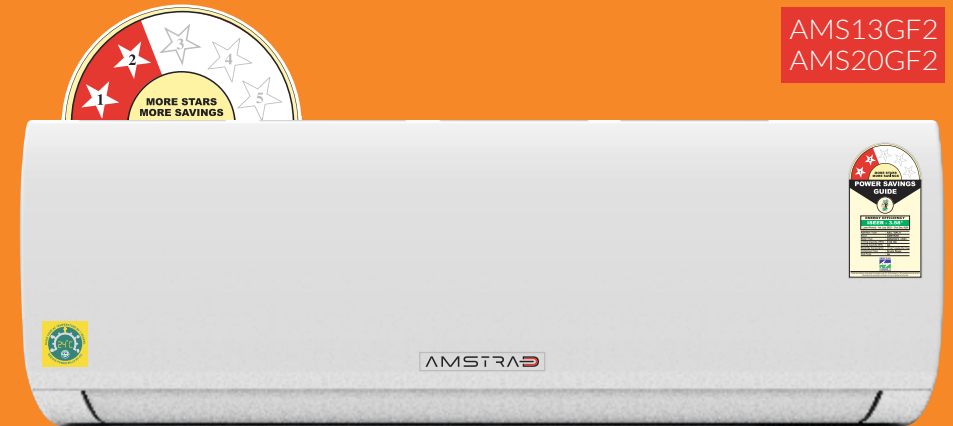

AMS13GF2
AMS20GF2

Fixed Speed AC

A combination of great cooling and energy saving to give you a comfortable experience.



ENERGY EFFICIENT ROTARY COMPRESSOR

It is designed to operate more efficiently, resulting in lower energy consumption and reduced operating costs



DEHUMIDIFYING MODE

It provides a more comfortable indoor climate, especially in regions with high humidity



TURBO COOLING

For faster cooling and heating





AMW193NG



AMC24iM2
AMC48iM2



Window AC

Amstrad Window ACs come with a promise of superior performance, elegant design and ensure energy savings.



100% COPPER

Better heat transfer, enhances energy efficiency & life of the Air Conditioner.



AUTO SWING

Delivers cool air to every corner of the room.



FILTER DIRTY ALARM

Filter does not get clogged and keeps the cooling performance and maintains the energy consumption.



Cassette AC

Surround cooling enabled by 360° directional wind (provided by 8 vents) can deliver air evenly throughout every corner in any space. It requires less space for installation (205mm width of false ceiling is the best standard in the industry).




COOLING

360° Airflow through 8 vents in all directions.



COMFORT

Independent Vent Control.



HEALTHY

Fresh Air Intake Easy Louver Clean.

TECHNICAL SPECIFICATIONS OF INVERTER SPLIT AIR CONDITIONERS

TECHNICAL SPECIFICATIONS OF INVERTER SPLIT AIR CONDITIONERS							
MODEL NAMES		AMS133DrCMi	AM133SAI / CH	AM133SAIHC	AMS135CMi	AMS13S3Di	AMS13Mi3
Type of AC		Inverter-Smart	Inverter (Gold Fin)	Inverter	Inverter - Smart	Inverter - Smart	Inverter
		Cooling Only	Cooling Only	Hot & Cold	Cooling Only	Cooling Only	Cooling Only
Capacity	Ton	1.0T	1.0T	1.0T	1.0T	1.0T	1.0T
Power Supply Source	V	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz
Cooling Capacity (100% / 50%)	W	3560 / 1780	3500 / 1780	3450 / 1725	3550 / 1775	3560 / 1780	3450 / 1725
Input Power (100% / 50%)	W	1080 / 450	1120 / 435	1010 / 390	800 / 340	1080 / 450	1030 / 390
Maximum Cooling Capacity	W	3834	3770	3716	3823	3834	3750
Annual Power Consumption	Kw/h	707.46	693.92	634.44	529.84	707.46	640.10
ISEER (Cooling)	W/W	3.90	3.90	4.21	5.19	3.90	4.17
Star Rating		3	3	3	5	3	3
Rated Current	A	4.80	4.90	4.50	3.60	4.80	4.60
INDOOR UNIT							
Net Dimensions (L x W x H)	mm	844 x 270 x 210	800 x 270 x 190	805 x 270 x 200	844 x 270 x 210	875 x 270 x 212	802 x 205 x 290
Packing Dimensions (L x W x H)	mm	936 x 340 x 290	860 x 320 x 260	865 x 340 x 270	936 x 340 x 290	936 x 345 x 300	865 x 280 x 375
Weight (Net) / (Gross)	Kg	10.0 / 12.0	8.2 / 9.6	8.4 / 10.0	10.0 / 12.0	10.0 / 12.0	9.6 / 12.2
Air Flow Volume	m ³ /h	700/600/500/400	630 / 550 / 450 / 350	630 / 550 / 450 / 350	750 / 650 / 550 / 450	700	570/455/400
Operating Noise Level	dB(A)	40	42 / 40 / 38 / 36	42 / 40 / 38 / 36	40	40	38.5 / 34 / 28.5
OUT DOOR UNIT							
Refrigerant	Type/ Gms	R32-400	R32-380	R32-650	R32-520	R32-400	R32-420
Net Dimensions (L x W x H)	mm	840 x 300 x 560	840 x 300 x 560	780 x 270 x 560	840 x 300 x 560	840 x 300 x 560	795 x 280 x 495
Packing Dimensions	mm	910 x 345 x 600	910 x 345 x 600	900 x 360 x 615	910 x 345 x 600	910 x 345 x 600	835 x 355 x 560
Outdoor Unit Weight	Kg	21.5 / 25.5	24.2 / 28.2	24.8 / 27.8	24.5 / 29.0	21.5 / 25.5	20.8 / 24.8
Liquid Tube Diameter	mm	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)
Gas Tube Diameter	mm	3/8" (9.52mm)	3/8" (9.52mm)	3/8" (9.52mm)	1/2" (12.7mm)	3/8" (9.52mm)	3/8" (9.52mm)

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 56 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.

TECHNICAL SPECIFICATIONS OF INVERTER SPLIT AIR CONDITIONERS

TECHNICAL SPECIFICATIONS OF INVERTER SPLIT AIR CONDITIONERS								
MODEL NAMES		AMS203DrCMi	AM203SAI / CH	AM203SAIHC	AMS205CMi	AMS20S3Di	AMS20Gi3	AMS25Gi3
Type of AC		Inverter-Smart	Inverter(Gold Fin)	Inverter	Inverter-Smart	Inverter-Smart	Inverter	Inverter
		Cooling Only	Cooling Only	Hot & Cold	Cooling Only	Cooling Only	Cooling Only	Cooling Only
Capacity	Ton	1.5T	1.5T	1.5T	1.5T	1.5T	1.5T	2.0T
Power Supply Source	V	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz
Cooling Capacity (100% / 50%)	W	5150 / 2575	5150 / 2575	5130 / 2565	5200 / 2600	5150 / 2575	5100 / 2550	6350 / 3175
Input Power (100% / 50%)	W	1595 / 610	1595 / 610	1810 / 580	1260 / 470	1595 / 610	1620 / 620	2070 / 770
Maximum Cooling Capacity	W	5547	5525	5525	5600	5547	5550	6839
Annual Power Consumption	Kw/h	996.65	996.65	1028.43	776.68	996.65	1012.67	1274.05
ISEER (Cooling)	W/W	4.00	4.00	3.86	5.18	4.00	3.90	3.90
Star Rating		3	3	3	5	3	3	3
Rated Current	A	7.00	7.00	8.20	5.60	7.00	7.20	9.10
INDOOR UNIT								
Net Dimensions (L x W x H)	mm	945 x 315 x 240	905 x 295 x 215	910 x 295 x 220	945 x 315 x 240	980 x 315 x 233	910 x 315 x 240	910 x 315 x 240
Packing Dimensions (L x W x H)	mm	1040 x 380 x 315	970 x 350 x 275	980 x 350 x 290	1040 x 380 x 315	1060 x 380 x 317	980 x 380 x 315	980 x 380 x 315
Weight (Net) / (Gross)	Kg	11.3 / 15.0	10.3 / 12.4	10.3 / 12.3	11.3 / 15.0	11.5 / 14.0	11.5 / 14.0	11.3 / 15.0
Air Flow Volume	m ³ /h	1150/1080/980/850	950/920/830/740	950/92/830/740	1200/1070/980/850	1150	1100	1150/1050/950/850
Operating Noise Level	dB(A)	42	44 / 41 / 38 / 35	44 / 41 / 38 / 35	42	42	42	44
OUT DOOR UNIT								
Refrigerant	Type/ Gms	R32-500	R32-500	R32-930	R32-630	R32-500	R32-550	R32-630
Net Dimensions (L x W x H)	mm	840 x 300 x 560	840 x 300 x 560	780 x 270 x 560	860 x 335 x 595	840 x 300 x 560	840 x 300 x 560	860 x 300 x 595
Packing Dimensions	mm	910 x 345 x 600	910 x 345 x 615	900 x 360 x 615	930 x 405 x 660	910 x 345 x 600	910 x 345 x 600	930 x 405 x 660
Outdoor Unit Weight	Kg	24.0 / 28.0	25.5 / 29.7	27.4 / 31.07	28.0 / 33.0	24.0 / 28.0	24.0 / 28.0	29.0 / 33.5
Liquid Tube Diameter	mm	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)
Gas Tube Diameter	mm	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 56 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.

TECHNICAL SPECIFICATIONS OF FIXED SPEED SPLIT AIR CONDITIONERS

MODEL NAMES		AMS13GF2	AMS20GF2	AMS20F2SMT
Type of AC		Fixed Speed	Fixed Speed	Fixed Speed
		Cooling Only	Cooling Only	Cooling Only
Capacity	Ton	1T	1.5T	1.5T
Power Supply Source	V	230V/1Phase/50Hz	230V/1Phase/50Hz	230V/1Phase/50Hz
Cooling Capacity	W	3450	5150	5000
Input Power	W	964	1440	1420
Annual Power Consumption	Kw/h	746.24	1114.71	1099.23
ISEER (Cooling)	W/W	3.58	3.58	3.52
Star Rating		2	2	2
Rated Current	A	4.3	6.4	6.4
INDOOR UNIT				
Net Dimensions (L x W x H)	mm	815x270x210	910x315x240	910x320x240
Packing Dimensions (L x W x H)	mm	936x340x291	980x380x315	995x380x300
Weight (Net) / (Gross)	Kg	9.5 / 12.5	12.0 / 15.0	12.0 / 14.5
Air Flow Volume	m ³ /h	700	1100	1030
Operating Noise Level	dB(A)	40	42	42
OUT DOOR UNIT				
Refrigerant	Type/ Gms	R32-410	R32-590	R32-670
Net Dimensions (L x W x H)	mm	840x300x560	840x300x560	840x300x540
Packing Dimensions (L x W x H)	mm	910x345x600	910x345x600	920x350x585
Outdoor Unit Weight (Net)/(Gross)	Kg	27.5 / 31.5	33.5 / 37.0	32.8 / 37.2
Liquid Tube Diameter	mm	1/4" (6.35mm)	1/4" (6.35mm)	1/4" (6.35mm)
Gas Tube Diameter	mm	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (12.7mm)

TECHNICAL SPECIFICATIONS OF FIXED SPEED TYPE WINDOW AIR CONDITIONERS

MODEL NAMES			AMW193NG
Parameters	Capacity	Unit	Cooling Only
		Ton	1.5 T
Power Supply Source		V	230V / 1 Ph / 50 Hz
	Cooling Capacity	W	4925
	Cooling Power Input	W	1540
Refrigerant	Rated Current	A	6.8
	Refrigerant	--	R32
	Refrigerant Charge	Gm	480
EER		W/W	3.2
Star Rating			3
Air Flow Volume	(H/M/L)	m ³ /h	840
Indoor Sound Level	(H/M/L)	dB (A)	56
Dimension of Unit	(L×W×H)	mm	660 x 735 x 430
Dimension of Carton Box	(L×W×H)	mm	740 x 825 x 540
Net Weight	Only Unit	kg	56
Gross Weight	With Packing	kg	61

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 60 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.

TECHNICAL SPECIFICATIONS OF CASSETTE AC

INDOOR MODEL			AMC24iM2	AMC48iM2
Power Supply		Ph-V-Hz	220-240V, 1Ph, 50HZ	380-415V, 3Ph, 50HZ
Cooling (T1)	Capacity	Ton	2.0T	4.0T
		Full / Half (W)	7034 / 3517	14000 / 7000
		Btu/h	24000	48000
	Input	Full / Half (W)	2100 / 900	5800 / 1980
	Rated Current	Full / Half (A)	9.5 / 3.4	9.1 / 3.1
	ISEER	W/W	3.90	3.18
	e. Tube Outside Dia. and Type	mm	Φ7, Innergroove Tube	Φ7, Innergroove Tube
	g. Number of Circuits		8	16
Indoor Air Flow (Hi/Mi/Lo)		m ³ /h	1302/1014/850	1862/1468/1288
Sound Level (Sound Pressure)		dB(A)	46/40/37	55/49/45
Throttle Type			Outdoor (Throttle Valve)	Outdoor (Throttle Valve)
Indoor Unit	Dimension (WxDxH)	mm	840 x 840 x 205	830 x 830 x 287
	Packing (WxDxH)	mm	990 x 990 x 250	910 x 910 x 330
	Dimension (WxDxH) (Panel)	mm	950 x 950 x 65	950 x 950 x 75
	Packing (WxDxH) (Panel)	mm	1030 x 1030 x 90	1035 x 1035 x 90
	Net/Gross Weight	Kg	22.6 / 27.3	27.7 / 32.7
	Net/Gross Weight (Panel)	Kg	5.8 / 9.5	5.8 / 9.5
Outdoor Noise Level		dB(A)	57	61
Throttle Type			Outdoor (Throttle Valve)	Outdoor (Throttle Valve)
Outdoor Unit	Dimension (WxDxH)	mm	890 x 345 x 675	946 x 410 x 810
	Packing (WxDxH)	mm	995 x 435 x 750	1090 x 500 x 885
	Net/Gross Weight	Kg	38.2 / 41.5	67.4 / 72.2
Refrigerant Type	Type		R32	R32
	Charged Volume	Kg	1	2.1
Design Pressure		MPa	4.8 / 1.5	4.3 / 1.7
Drainage Water Pipe Diameter		mm	ODΦ32mm	ODΦ32mm
Refrigerant Piping	Liquid Side/ Gas Side	mm(inch)	9.52mm(3/8in)/15.9mm(5/8in)	9.52mm(3/8in)/15.9mm(5/8in)
Controller			Remote Control	Remote Control
Operation Temperature		°C	17-30	17-30
Room Temperature	Indoor (Cooling)	°C	17~32//	18~32//
	Outdoor (Cooling)	°C	18~43//	18~50//

Note:

1. Amstrad Air Conditioners are designed to work in ambient temperature upto 52 degree centigrade, but some models are tested and can work upto 56 degree centigrade ambient temperature.
2. There is a continual improvement process for the better performance, changes in design and specifications can be made without prior notice.
3. Noise level to be experienced from the distance of one meter from air conditioner.
4. All tests are carried at standard conditions.



AMSTRAD NEXT GENERATION SERVICE




Ways to raise a
Service Request

You can reach us 24x7
7 days a week



Download in Browser

1. Mobile App – app.amstradworld.com
2. Signup in the App with Name, Mobile Number and Address and create Password to Login.
3. Go to the Amstrad Product List and Raise a Service Request.
4. Customer can track the status of the Service Request via the App.

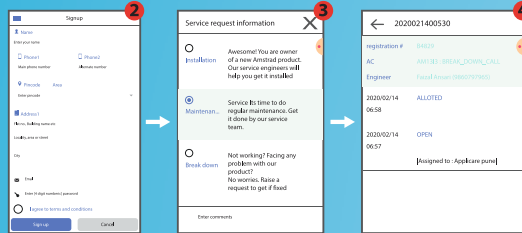

WhatsApp

WhatsApp us on **9175950079** anytime as per your convenience.



Website

Easily raise a service request from our website: www.amstradworld.com



Email

Kindly email us at : care@amstradworld.com



IVR

Stuck in 9 to 6 Job? No time to call Customer Care number?
Call Multi-Lingual IVR number **020 7197 0079**. 24x7 - 365 Days
Available in Hindi | English | Gujarati | Malayalam | Punjabi | Tamil | Kannada | Telugu | Bangla



Call on Customer Care number

You can call us on the Customer Care No.: **1860 266 7777**



AMSTRAD Guarantees Customer Delight

- ✓ **Checkpoint 1:** Upon registration of the AMSTRAD product, customer gets a WELCOME SMS.
- ✓ **Checkpoint 2:** After registering for a service request, customer gets an acknowledgment SMS with service request number.
- ✓ **Checkpoint 3:** Within 120 minutes of the service request a response call will be made by ASP and a SMS is sent to the customer notifying the customer of the response call that was made.

If no call was received and system falsely updated the customer can reply back with "OVOT NO" on 56563.

- ✓ **Checkpoint 4:** After the service request is completed a verification SMS is sent.

If the customer is not satisfied/happy or the call is not completed but falsely updated the customer can reply back "OVOT NO" on 56563.



India and Industry's
1st Service Process

which updates you and verifies at each milestone.



Save the Earth.



Save the Future.

- ❖ Please don't dispose any Amstrad products, these can be recycled. Contact us on our website or dial a Toll free no. 1800 267 4777 and we will send someone to recycle your products.
- ❖ Amstrad uses only green refrigerant like R32 which has a Zero GWP (Global Warming Potential).
- ❖ All Amstrad PCB's use lead free soldering material and are ROHS compliant.
- ❖ Rooftop Solar Power Generation to achieve ZERO Carbon footprint 2025.
- ❖ Rainwater Harvesting and Sewage Treatment Plant.
- ❖ Planted over 500 trees at the factory campus as part of Green Initiatives "Save the Earth. Save the Future".



- ❖ Green Commitment - e catalogue
AMSTRAD believes in conserving the environment and saving the planet for the Next Generation. We need your support in our green endeavour by promoting e-catalogue to save the trees which are being cut every day.



Amstrad Consumer India Private Limited (formerly known as "OVOT Private Limited")

F-3, Supa MIDC, Supa-Parner, Ahmednagar, Maharashtra 414301

Website: www.amstradworld.com | Email: care@amstradworld.com

Customer Care No.: 1860 266 77777 | IVR No.: 020 7197 0079 | WhatsApp Service Support: +91 9175950079

E-Waste Email: ewaste@amstradworld.com | E-Waste Toll Free No.: 1800 267 4777