

Flexible UHF Metal Tag




Functional Specifications:

| | |
|------------------------------|---|
| RFID Protocol: | EPC Class1 Gen2, ISO18000-6C |
| Frequency: | (US) 902-928MHZ, (EU)865-868MHZ |
| IC type: | Ucode-8 |
| Memory: | EPC 128bits, User 0bits, TID 96bits |
| Write Cycles: | 100,000 Times |
| Functionality: | Read/write |
| Data Retention: | 50 Years |
| Applicable Surface: | Metal Surfaces |
| Read Range : (Fix Reader) | 2.0 meters on metal surface 1.5 meters on liquid surface |
| Warranty: | 1 Year |

Physical Specification:


| | |
|----------------------|--|
| Size: | 60.0x6.0mm |
| Thickness: | 1.0mm |
| Material: | Foam |
| Colour: | White (Customizable color printing) |
| Mounting Methods: | Adhesive |
| Weight: | 1.3g |
| Recommended Printer: | Zebra R110Xi4 / Postek TX3R / SATO CL4NX |

Dimensions:



Focus on UHF Special Tag

FLE6006:

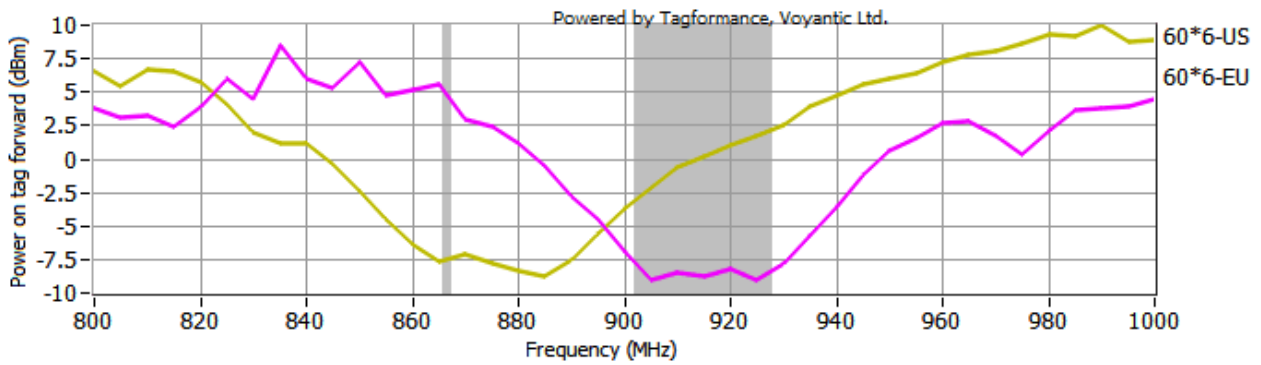

Environmental Specification:

| | |
|-----------------|--|
| IP Rating: | IP57 |
| Temperature: | -20 ~ 85°C |
| Certifications: | Reach Approved, RoHS Approved, CE Approved |