




OUTDOOR OPTICAL DISTRIBUTION CABINET (large fiber count)


- For outdoor applications
- Weather proof and dust proof, meeting IP65
- Double-walled sides, rear panel and door, providing thermal regulation.
- Thermosetting fiberglass-reinforced polyester cabinets can endure climate changes and adverse environment, and are rust proof
- Well protected from accidental or malicious damages
- Complete cable routing design with fiber bend radius over 40mm
- Modular design and easy installation, modules are exchangeable
- Optimal management for patch cords with fiber storage units
- Suitable for ribbon and non-ribbon optical fibers
- Capacity up to 144 ports for size 2; 288 ports for size 1; 720 ports for size 5
- Tri-point-locking ensure safe and reliable
- Splitter tray available
- Front access for ODF-OC1 and ODF-OC2; front and Back access for ODF-OC5
- Optional splice tray for direct splice available for ODF-OC5

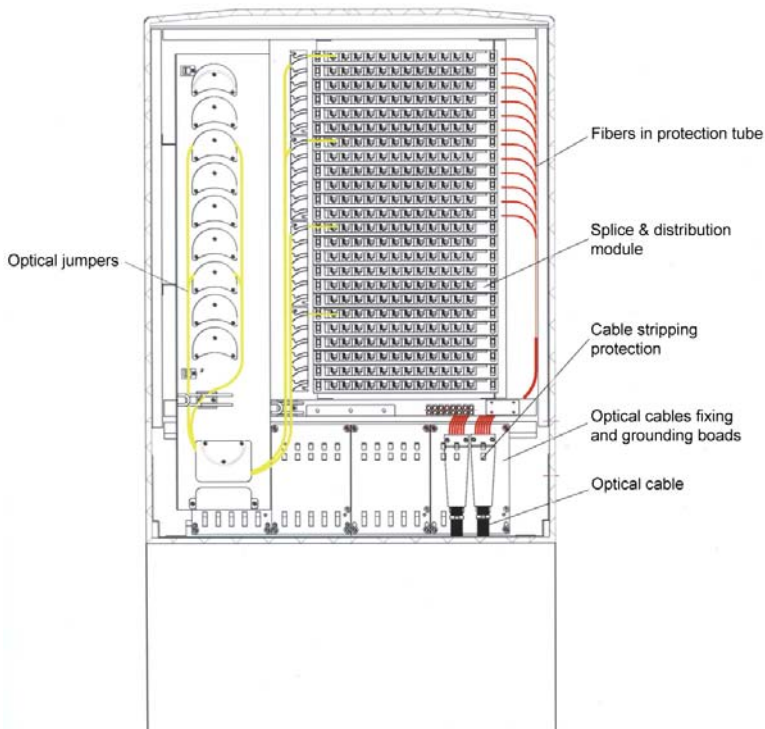

ODF-OC1



Splice and distribution modules can be inserted in and pulled out freely for operations.

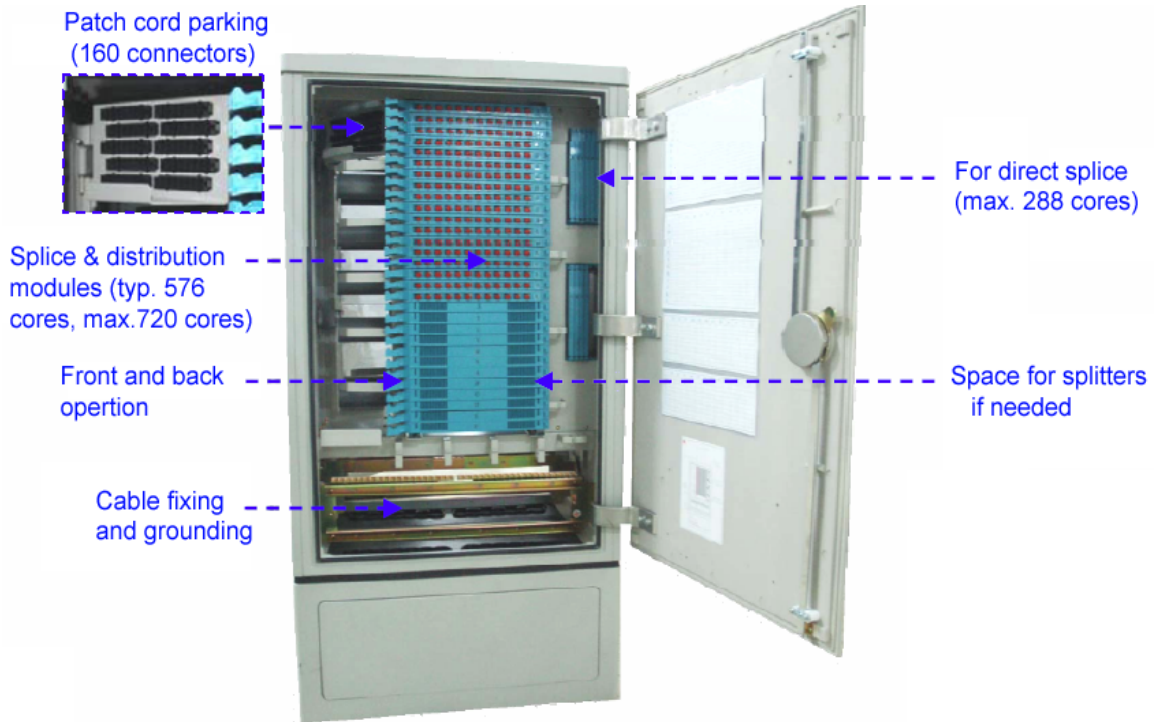


ODF-OC5




Patch Cord Parking

Splice & Distribution Module

- Capacity up to 12 ports
- Combined splice and distribution
- Suitable for ribbon and non-ribbon cables
- Oblique installation of adapters
- Suitable for installation with FC, SC, LC and ST adapters

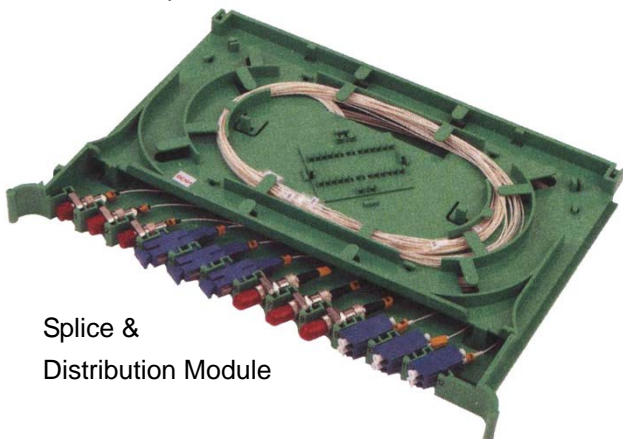

Splice & Distribution Module

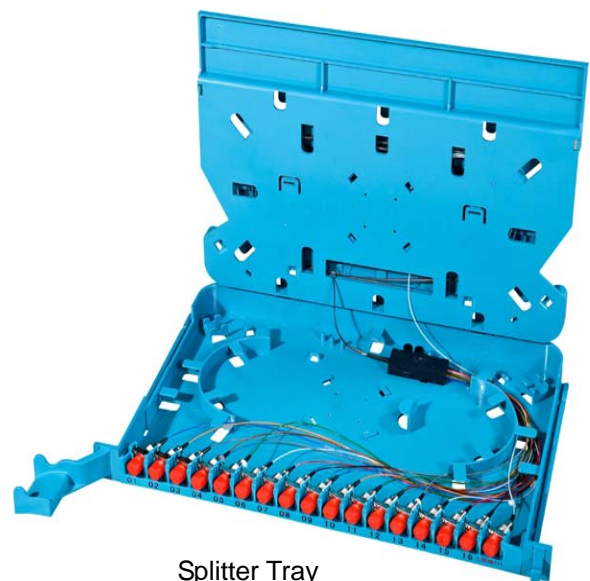

Splitter Tray

Ordering Information

Example: ODF - OC 1 - 288 FC
1 2 3 4

1	Product Type	OC = Outdoor cabinet; M = Module
2	Size	Size 1, 2 or 5 for cabinet; Blank for module
3	Number of Ports	72, 144, 288, 576, etc.
4	Adapter Type	FC, SC, ST, LC, etc; Blank = unloaded

Note: Cabinet will include all necessary enclosures, modules and accessories.

Ordering Guide

		Dimension		Max. Capacity
Cabinet	Size 1	Excluding the base	1100 x 750 x 360 mm ³	288 ports
		Including the base	1450 x 750 x 360 mm ³	
	Size 2	Excluding the base	695 x 520 x 280 mm ³	144 ports
		Including the base	955 x 520 x 280 mm ³	
	Size 5	Excluding the base	1100 x 756 x 625 mm ³	720 ports
		Including the base	1550 x 756 x 625 mm ³	
Module		25 x 320 x 200 mm ³		12 ports

* Specifications subject to change without prior notice.



PACIFIC INTERCONNECTIONS, LLC

1022 N 33RD Pl., Renton, WA 98056, USA.
 Tel: (425) 277 9527 Fax: (425) 277 2599
www.pacificinterco.com