

The TOTEM nT2 detector: architecture, operation and performance

E. Bossini^{a,*} for the TOTEM collaboration

^a*Istituto Nazionale Fisica Nucleare, Sezione di Pisa,
Largo B. Pontecorvo 3, Pisa, Italy*

E-mail: edoardo.bossini@pi.infn.it

The TOTEM experiment at the LHC has produced a large set of measurements on diffractive processes and pp cross sections. A new detector, called nT2, has been designed to measure the inelastic scattering rate during the LHC special run of 2023. Due to the high radiation environment, the detector had to be installed in 10-20 minutes at most, then commissioned and operated after only few days. The detector, based on plastic scintillators read out by matrices of SiPMs, was designed with such constraints in mind. The front-end, DAQ and control electronics was developed with a fault tolerant architecture, moving as many functionalities as possible on a radiation tolerant SoC FPGA, hosting an integrated ARM controller. Here we will describe the nT2 detector and its read-out and control electronics. The detector was successfully operated during the special run: we will report the preliminary results on the detector performance.

*42nd International Conference on High Energy Physics (ICHEP2024)
18-24 July 2024
Prague, Czech Republic*

*Speaker

1. Introduction

The TOTEM[1] experiment is located at the Interaction Point (IP) 5 of the Large Hadron Collider (LHC). The experiment shares the IP and the experimental cavern with the CMS experiment. TOTEM has performed various measurements on the forward diffracting pp processes. Among them, it precisely determined the pp cross sections at various center-of-mass energies \sqrt{s} , from 7 TeV up to 13 TeV [2]. The TOTEM experiment also performed a direct measurement of the ρ parameter, the ratio between the real and imaginary part of the forward scattering amplitude with 4-momentum $|t| = 0$ [3]. The two sets of measurements, total cross section and ρ , lead to first evidence of the Odderon [4], C-odd counterpart of the Pomeron, the latter being the main actor in the Regge theory for diffractive forward physics. Combining TOTEM and D0 data, collected at Fermilab in $p\bar{p}$ collisions at $\sqrt{s} = 1.96$ TeV, the discovery was claimed [5].

Differently from the other LHC experiments, TOTEM requires a special configuration of the machine optics to be able to detect elastic protons scattered at few microradians. Such optics, characterized by a very high value of the beta function at the IP β^* (from 90 m up to 6 km), requires dedicated LHC fills, referred to as *special run*. To better constrain the theoretical models on the Odderon, additional special runs were approved by the LHC, in particular one at $\sqrt{s} = 13.6$ TeV with $\beta^*=90$ m, aiming to determine the total cross section, scheduled for June 2023.

The precise measurement of the total cross section with the *luminosity-independent* method [6] requires the simultaneous determination of the differential elastic cross section and the inelastic event rate. The detection of very forward protons originating from elastic collisions is performed in the Roman Pots (RP), movable pipe insertions with a secondary vacuum, symmetrically located at around 200–220 m from the LHC IP5. The RPs can be moved into the primary vacuum of the machine through vacuum bellows, allowing the equipped detector to approach the LHC beam down to few millimetres. In TOTEM, they are instrumented with silicon strip detectors[1]. Inelastic events are instead detected by dedicated detectors, called forward telescopes, symmetrically integrated with the CMS structure at few meters from the IP, instrumenting the forward pseudorapidity η region. For the previous measurements of TOTEM, two inelastic telescopes were in use, T1 and T2[1]. However, after having successfully sustained a radiation damage 10 times above the design requirements, they have been dismantled. An R&D was hence initiated to replace the inelastic detector T2 with a new inelastic telescope, called nT2 [7]. The nT2 is designed to cover a pseudorapidity region $5.3 < |\eta| < 6.5$, allowing to detect more than 90% of the inelastic events.

2. The nT2 detector for inelastic event tagging

To cope with project budget, requirements and R&D schedule, scintillators coupled to Silicon PhotoMultipliers (SiPM) were selected as detection technology for the nT2. Some tight constraints, derived from the operational environment and the LHC schedule, were taken into consideration during the design of the detector. The installation was scheduled to happen during a LHC technical stop, a short period of a few days in between normal operations. The special run, with a foreseen duration of about 24 h, would have taken place only a couple of days after the installation, leaving a very short time for detector commissioning and eventual bug fixing. Moreover, the installation of the detector, symmetrically located at ~ 15 m from the IP close to the beam pipe, required the opening

of the CMS forward radiation shields, exposing the technicians to a non negligible radiation dose. Hence, the detector was divided in two sections. The inner section, inside the radiation shields, had to be installed in minutes. After that the shields must be closed and the inner part of the detector would not have been any longer accessible. The outer section, outside the shields, would have been still accessible, with some limitation, during the next two days, until the end of the technical stop. The base unit of the nT2 is made of plastic scintillator tiles (EJ-204, manufactured by Eljen), with 2 cm thickness (figure 1, left). The tiles are cut in a trapezoidal shape, with a total surface of $\sim 100 \text{ cm}^2$. On one face a sigma-shaped groove is made to embed a WaveLength Shifter (WLS) fiber with a diameter of 1 mm. Each unit is then wrapped individually and secured to a mechanical support frame, a mechanical splicer is directly placed on the exit point of the WLS fiber. The

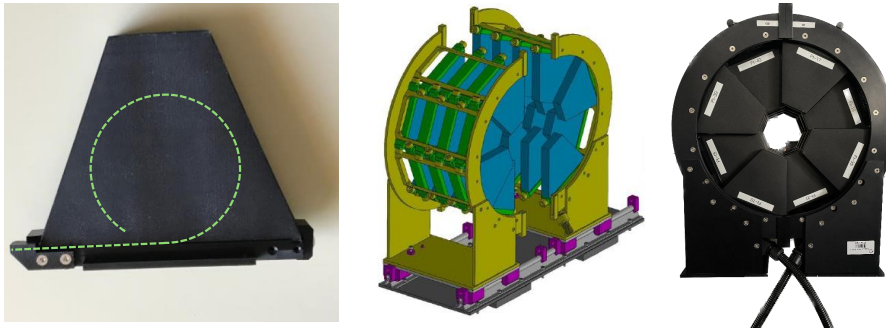


Figure 1: On the left, a picture of one detector tile, with the wrapping and the mechanical support on the bottom. The green dashed line represents the position of the WLS fiber. In the center, the design of one arm of the detector. On the right, a picture of one arm of the detector before the installation.

splicer connects, with a glue-less connection, the WLS fiber to a clear fiber of 2 m length to reduce the light attenuation from the sensor to the light detector. This design ensure that both the tiles and the external fibers can be independently and quickly replaced in case of failure. The nT2 is then assembled in quarters, two per each side of the interaction point (called *arm*), designed to be closed around the beam pipe (figure 1, center and right). The size of one arm of the detector, after the closure around the beam pipe, is $\sim 25 \text{ cm}$ in the direction along the beam axis, with an outer diameter of $\sim 50 \text{ cm}$, including the external support structure. Each quarter is made by 4 detection layers, each one formed by 4 tiles disposed on a semi-circle with a partial overlap. A set of 4 aligned tiles is called a *wedge*. Hence, each particle will traverse at least 4 aligned tiles in the wedge, providing a good level of redundancy for particle detection and noise suppression. With such a design, the installation of the inner section of the detector on pre-installed rails can be done in few minutes and, after the routing of the fiber bundles in the available slot, the shields of CMS can be closed for a much safer environment to work in, leaving only passive components inside (figure 2). The fibers are read out with a S13361-6050 16-channels SiPM matrix from Hamamatsu, one for each quarter, located outside the shields in the outer section of the detector together with the rest of the electronics. Biasing of the MPPC is generated by temperature compensated voltage converters, one pfor each matrix, controlled through a serial interface. To digitize the signal the detector relies on a fast discriminator, the NINO chip[8], a differential amplifier and fixed threshold discriminator. Additional feature of the chip is that the digital output signal has a Time Duration (TD) which depends on the input charge Q , with higher charges generating longer TD.



Figure 2: On the left, a drawing of the detector integrated in CMS. The beam pipe is perpendicular to the picture, in the center of the nT2 detector. On the center and right, two pictures taken during the installation training with a mock-up.

For the read-out and control electronics we profit from the fruitful collaboration established between the TOTEM and CMS collaborations. Indeed, in the last years the TOTEM read-out and control systems have been integrated in the CMS infrastructure. This was made in the framework of the joint CMS-TOTEM Precision Proton Spectrometer project[9] (CT-PPS, now only PPS). Electronics from the timing system of the PPS detector[10] has been re-adapted to fit the requirements of the nT2 and branched to the previous T2 services. Hardware-wise, the only new component developed is represented by an interface mezzanine board, hosting the SiPM matrices, the HV controllers, the NINO chips and the digital to analog converters for the control of the discrimination thresholds. The mezzanine is then mounted on the CMS-TOTEM general purpose digitizer board, used by the timing system of PPS. The integration of the nT2 with the CMS control and read-out systems relies on the firmware loaded in the SmartFusion2 System-On-Chip (SoC) FPGA on the digitizer board. In addition to event building, data buffering and communication with the nT2 mezzanine components, it also embeds a Time to Digital Converter (TDC) feature, adding a coarse timestamp (6.25 ns bin) to the leading and trailing edges of the NINO signal, used in the offline analysis. Several capabilities in terms of debugging and online monitoring have been implemented, in particular real-time efficiency and particle rate measurements. Control of mezzanine devices, through different serial protocols, is handled by the ARM CORTEX M3 integrated in the SoC FPGA, adding flexibility and fast debugging in case of need, even during the data taking. The C code for the microcontroller is stored on an integrated flash memory and is rebootable through the firmware.

3. Operations and preliminary performance

Detector installation was performed within the foreseen timeline. On both sides of the IP the installation of the inner part of the detector was made in less than 10 minutes, after that the CMS forward shields were closed. The dose collected by the technician was negligible (~ 10 μ Sv). The special run took place on June, few days after the detector installation and lasted for ~ 30 hours. Tuning of NINO thresholds and SiPMs bias was performed online, during the commissioning fills, exploiting the FPGA onboard functionalities. Since the beginning of data acquisition the detector was perfectly integrated with the CMS control and acquisition system, with all online reconstruction and monitoring software working as intended. In figure 3 is reported the occupancy in each wedge

on one side of the IP, as detected by the online data quality monitoring. In there, a wedge is defined as active if there is a coincidence of at least three tiles. In the center and right side of figure 3

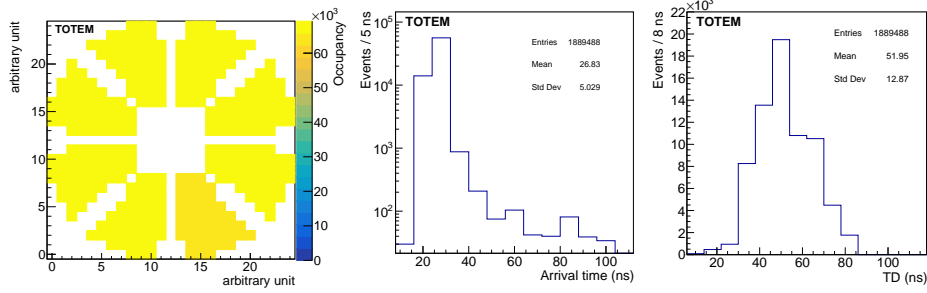


Figure 3: On the left, occupancy of the wedges of one arm of nT2. The bins are shaped to provide a simplified view of the real detector as seen from the IP. The histograms on the right side are examples of the signal arrival time and the TD for one channel of the detector.

are instead reported examples of the online histograms of the particle arrival times (defined as the timestamp of the signal leading edges) and the signal TDs respectively.

Data analysis is currently ongoing, with some preliminary results on the detector performance already available. On the left of figure 4, an example of the correlation between the particle arrival time and the TD is reported for one of the channels. As expected, there is a negative correlation, with signal with higher TD having lower arrival times. This is expected as a signal with larger charge (and hence TD) goes above the fixed threshold of the discriminator before a simultaneous signal with a lower charge. This correlation is currently exploited to suppress noise hit by identifying an acceptance region in the correlation plot. In the figure an example cut is shown, defining a hit as good if it lies in between the two red lines. On the right of figure 4 we reported the preliminary results on the detector efficiency for each wedge. First, the efficiency of each tile has been evaluated by exploiting the large track multiplicity generated by inelastic events. By checking the presence of hits in the nearby wedges and in the other tiles of the wedge, it was possible to compute the efficiency of a given tile. The overall efficiency of a wedge is then determined with a combinatorial calculation, assuming all tiles to have independent efficiency and defining a wedge efficient if at least 2 tiles out of 4 have hits. All wedges show an efficiency of at least 96%, with a median of 99.7%. No noise suppression based on the hit time stamps is performed. If we apply a tight selection cut as the one shown in the left plot on all tiles, the median of the efficiency become 98.6%. Work is ongoing to define the optimal cut on the noise. Wedges with lower efficiency can eventually be recovered by exploiting the azimuthal symmetry of inelastic events in the LHC collisions.

4. Conclusions

The measurements performed by the TOTEM experiment brought a significant improvement in the forward diffractive physics, culminating in the discovery of the Odderon. To further discriminate between different theoretical models, the LHC approved a special run to measure the total cross section at $\sqrt{s} = 13.6$ TeV. The precise measurement of the total cross section through the luminosity independent method needed a new inelastic telescope to be designed, based on scintillators read out by SiPMs. The detector, to address the extremely tight constraint in terms of installation and

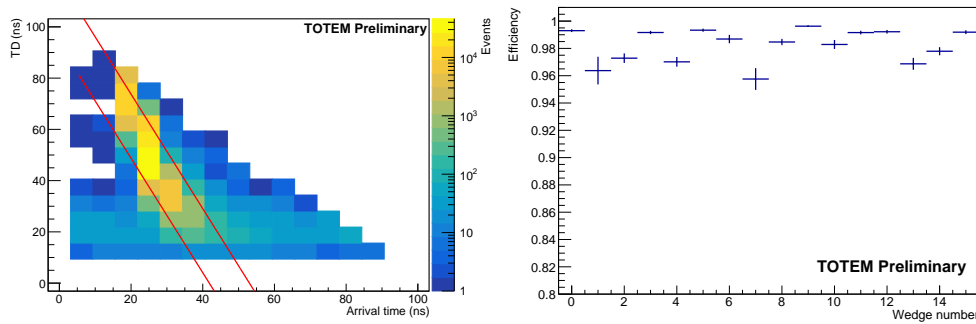


Figure 4: On the left, correlation plot between the particle arrival time and the signal TD, with an example cut superimposed. On the right, the preliminary efficiency of all wedges of the detector.

commissioning time, has been divided in a passive inner part included in the CMS forward radiation shield and an outer part. Large part of the electronics has been readapted from the timing system of the PPS sub-detector of CMS, with some key components developed on purpose. The detector, with the inner part installed in less than 10 minutes, has been commissioned in the short time available and successfully operated for the special run of TOTEM in June 2023. Preliminary results demonstrate the offline capability to suppress residual noise hits based on the time measurements included in the data. The detector shows a high efficiency of all wedges, with an average value in the range 99.7%-98.6%, depending on the quality cut applied to the hits. Analysis of the detector performance is currently being finalized and the collected data will be then used to complete the TOTEM physics program.

Acknowledgment

We would like to thank the CMS collaboration for their support during the detector installation and the data taking as well as for the analysis.

References

- [1] TOTEM collaboration, *The TOTEM experiment at the CERN large hadron collider*, *Journal of Instrumentation* **3** (2008) S08007.
- [2] TOTEM collaboration, *First measurement of elastic, inelastic and total cross-section at $\sqrt{s} = 13$ TeV by TOTEM and overview of cross-section data at LHC energies*, *Eur. Phys. J. C* **79** (2019) 103 [1712.06153].
- [3] TOTEM collaboration, *Measurement of elastic pp scattering at $\sqrt{s} = 8$ TeV in the Coulomb–nuclear interference region: determination of the ρ -parameter and the total cross-section*, *Eur. Phys. J. C* **76** (2016) 661 [1610.00603].
- [4] TOTEM collaboration, *First determination of the ρ parameter at $\sqrt{s} = 13$ TeV: probing the existence of a colourless C-odd three-gluon compound state*, *Eur. Phys. J. C* **79** (2019) 785 [1812.04732].

- [5] D0, TOTEM collaboration, *Odderon Exchange from Elastic Scattering Differences between pp and $p\bar{p}$ Data at 1.96 TeV and from pp Forward Scattering Measurements*, *Phys. Rev. Lett.* **127** (2021) 062003 [2012.03981].
- [6] TOTEM collaboration, *Luminosity-independent measurements of total, elastic and inelastic cross-sections at $\sqrt{s} = 7$ TeV*, *EPL* **101** (2013) 21004.
- [7] TOTEM collaboration, *Upgrade of the TOTEM T2 Telescope*, Tech. Rep. CERN-LHCC-2019-007 ; TOTEM-TDR-004, <https://cds.cern.ch/record/2677468/> (2019).
- [8] F. Anghinolfi, P. Jarron, F. Krummenacher, E. Usenko and C. Williams, *NINO: An ultrafast low-power front-end amplifier discriminator for the time-of-flight detector in the ALICE experiment*, *Nuclear Science, IEEE Transactions on* **51** (2004) 1974 .
- [9] M. Albrow, M. Arneodo, V. Avati, J. Baechler, N. Cartiglia, M. Deile et al., *CMS-TOTEM Precision Proton Spectrometer*, Tech. Rep. CERN-LHCC-2014-021. TOTEM-TDR-003. CMS-TDR-13, CERN, Geneva (Sep, 2014).
- [10] E. Bossini on behalf of the TOTEM and CMS collaboration, *The CMS Precision Proton Spectrometer timing system: performance in Run 2, future upgrades and sensor radiation hardness studies*, *JINST* **15** (2020) C05054 [2004.11068].