

Predictive Modelling of Stress and Heat Flux in Monoblock Divertors Using Machine Learning for Fusion Energy Applications

Ayobami Daramola^a

^aSupa, School of Physics and Astronomy. Centre of Science at Extreme Conditions. The university of Edinburgh, United Kingdom.

Email address: adaramo2@ed.ac.uk

Abstract

The management of extreme heat loads in fusion reactors is critical to the integrity of plasma-facing components (PFCs). This study presents a real-time predictive framework for monoblock divertors, which are primarily composed of tungsten to manage thermal stress effectively. By combining finite element analysis (FEA) data with a Gradient Boosting Regressor (GBR), our model predicts stress distribution, heat flux, and potential failure points. Our results indicate significant stress concentrations at thermal gradient points, with stress levels reaching up to 2000 MPa. The proposed framework facilitates data-driven design enhancements, proactive maintenance strategies, and improved operational safety as fusion reactors transition from experimental to commercial applications.

1. Introduction

Nuclear fusion holds promise as a sustainable and clean energy source, with the potential to meet the growing global energy demand [1]. One of the key components in achieving stable and efficient fusion reactions is the divertor, which plays a critical role in managing the intense heat and particle flux produced during fusion [2–5]. The divertor helps maintain plasma purity and protects reactor walls, ensuring the overall performance and efficiency of the reactor. Despite the use of robust materials like tungsten, divertor components still face substantial challenges, including thermal fatigue, cracking, and microstructural degradation due to the extreme heat loads and particle bombardment they endure [6].

Recent advances in computational modelling and machine learning have opened up new opportunities to tackle these challenges by enhancing the ability to simulate and predict the behaviour of reactor components under extreme conditions [7–11]. In particular, the concept of a digital twin has emerged as a transformative technology in the predictive modelling of plasma-facing components (PFCs) [12]. A digital twin serves as a real-time, virtual replica of the physical system, allowing engineers to continuously monitor and predict the system's behaviour based on current operational data [12, 13]. This approach enables proactive maintenance and timely interventions, potentially extending the lifespan of critical reactor components and enhancing reactor safety.

The monoblock divertor, primarily constructed from tungsten, is designed to withstand high thermal and mechanical stresses due to its high melting point and resistance to plasma erosion [3, 5, 14–19]. However, the harsh environment, characterized by heat fluxes that can reach up to 20 MW/m², imposes significant thermal gradients that induce mechanical stresses across different material layers. This often leads to fatigue, cracking, and other types of material failure, particularly in regions with differing thermal expansion coefficients [5, 6, 14, 19–21]. Understanding these complex thermal and mechanical interactions is crucial for improving the reliability and safety of fusion reactors as they transition from experimental setups to commercial applications.

This study proposes an integrated framework that combines finite element analysis (FEA) with machine learning (ML) techniques, specifically a Gradient Boosting Regressor (GBR) [22], to predict stress, temperature distribution, and potential failure points in monoblock divertors in real time. The GBR model is well-suited for this task because it effectively manages the non-linearities inherent in material behaviour under high thermal gradients [22]. By leveraging existing FEA data, the digital twin framework developed here aims to provide insights into stress concentration and failure mechanisms, enabling a data-driven approach to improving design and optimizing maintenance strategies.

The overarching objective of this research is to create a robust predictive model for the thermomechanical behaviour of monoblock divertors. By providing real-time insights into stress and heat flux distributions, this model can help enhance the safety, reliability, and efficiency of fusion reactors. This work not only contributes to the understanding of material behaviour under extreme conditions but also highlights the potential of digital twin technology in advancing the future of fusion energy systems.

2. Methods

2.1. Description of the monoblock divertor

The monoblock divertor studied in this work is constructed from **tungsten armor**, encasing a **copper-chromium-zirconium (CuCrZr)** cooling pipe with a softer **copper interlayer** between the tungsten and CuCrZr [3, 5, 7, 14, 15, 17, 18, 21, 23]. This multilayered design effectively manages thermal stresses under operational conditions, ensuring robust bonding while accounting for different rates of thermal expansion in each layer. In this work, the geometry of the divertor is represented by a 2D grid, which simulates the distribution of temperature, stress, and heat flux across the structure.

Under typical operational conditions, the divertor is subjected to a **steady-state heat flux** of about 10 MW/m², with the ability to endure transient peaks of up to 20 MW/m² during off-normal events. This multi-material architecture is designed to balance effective heat dissipation with high structural integrity, reducing the likelihood of material failure due to temperature-induced stresses.

2.2. Material properties and finite element analysis

The material properties used in the simulation are temperature-dependent, based on data sourced from existing literature and **finite element analysis (FEA)** studies. **Tungsten** is chosen for its high melting point, good thermal conductivity, and resistance to plasma erosion, but its properties, including thermal conductivity and elastic modulus, degrade significantly at high temperatures [24]. **Copper** and **CuCrZr** serve as thermal and structural support materials, aiding in heat dissipation and maintaining mechanical stability [4–6, 15, 20].

- i. **Thermal conductivity $\kappa(T)$** : The thermal conductivity of tungsten decreases with increasing temperature, modelled using a cubic interpolation function based on empirical data: $\kappa(T) = f(T)$, where $f(T)$ denotes the cubic interpolation over temperature.
- ii. **Thermal expansion $\alpha(T)$** : The coefficient of thermal expansion influences stress generation due to temperature gradients. Similar interpolation methods ensure accurate representation of thermal expansion as a function of temperature.

2.3. Simulation of heat transfer and stress distribution

The heat transfer and stress distribution within the monoblock divertor was simulated using a combination of FEA and machine learning approaches. The heat transfer is governed by the equation:

$$\rho c_p \frac{\partial T}{\partial t} = \nabla \cdot (\kappa \nabla T) + Q \quad (1)$$

where T is temperature, ρ is density, c_p is specific heat, κ is thermal conductivity, and Q is the applied heat flux.

The **stress** generated in the divertor is calculated based on thermal expansion mismatches and material properties using:

$$\sigma = E_T \cdot \epsilon_{thermal} = E_T \cdot (\alpha_T \cdot \Delta T) \quad (2)$$

σ is the stress, E_T is the temperature-dependent elastic modulus, $\epsilon_{thermal}$ is the thermal strain caused by temperature gradients, α_T is the coefficient of thermal expansion and ΔT represents the temperature gradient across the material.

The **2D grid** representation of the divertor allowed the simulation to apply heat flux to specific areas, generating a real-time visualization of **temperature, stress, and heat flux** distributions.

2.4. Machine learning for failure prediction

A Gradient Boosting Regressor (GBR) was employed to predict potential failure points in the monoblock divertor based on the stress, temperature, and material properties. The GBR is well-suited for handling non-linearities inherent in material responses under extreme conditions, and it effectively integrates with FEA data to identify regions susceptible to damage.

2.4.1 Gradient boosting regressor framework

The GBR model operates by combining predictions from multiple weak learners, typically decision trees, to improve prediction accuracy iteratively. The process involves:

- i. **Initialization:** The model starts with an initial constant prediction, $f_0(x) = \arg \min_c \sum_{i=1}^N L(y_i, c)$, where L is the loss function, y_i are the true labels and c is the initial constant.
- ii. **Iterative fitting:** For each iteration m :
 - Compute the pseudo-residuals: $r_{im} = -\frac{\partial L(y_i, f_{m-1}(x_i))}{\partial f_{m-1}(x_i)}$
 - Fit a weak learner $h_m(x)$ to the pseudo-residuals: $h_m(x) \approx r_{im}$
 - Update the model: $f_m(x) = f_{m-1}(x) + \eta h_m(x)$, where η is the learning rate.
- iii. **Final prediction:** $f(x) = f_0(x) + \sum_{m=1}^M \eta h_m(x)$

The GBR model uses these predictions to identify areas of the divertor that are at high risk of **mechanical failure** due to **thermal expansion mismatches** and **material property degradation** at elevated temperatures. This allows for a proactive approach to maintenance, reducing the risk of catastrophic failure by reinforcing critical regions.

2.5. Real-Time visualization and digital twin integration

To enhance the usability of the predictive framework, real-time visualization techniques were incorporated. Temperature, stress, and heat flux distributions were dynamically updated within the divertor model, providing engineers with continuous, up-to-date information about the divertor's operational state. This real-time data forms the basis for a digital twin of the divertor, enabling ongoing analysis and decision-making support.

The digital twin approach allows for a real-time virtual replica of the divertor that mirrors the current physical state of the system. This enables timely interventions based on operational data, supporting predictive maintenance and reducing the likelihood of unexpected failures. By integrating FEA simulations with machine learning, this digital twin framework provides a robust tool for enhancing the operational safety and efficiency of fusion reactors.

3. Results and Discussion

3.1. Real-time stress distribution

The real-time stress distribution across the monoblock divertor surface reveals significant non-uniformity, with stress concentrations localized in areas experiencing steep thermal gradients (Figure 1). Stress levels were found to range from 150 MPa in regions with minimal thermal exposure to peaks of up to 2000 MPa in areas subjected to the highest thermal cycling. These stress peaks primarily arise at the interfaces between tungsten, copper, and copper-chromium-zirconium (CuCrZr) layers, where differing coefficients of thermal expansion lead to substantial thermal expansion mismatches.





Such localized stress is a direct consequence of the non-uniform temperature distribution within the divertor. The outer layer of tungsten, which faces the plasma, is exposed to intense heat flux, leading to thermal expansion that contrasts sharply with the copper and CuCrZr layers below it. The tungsten layer's high melting point and thermal conductivity, while advantageous for heat resistance, also mean that it rapidly expands under high thermal loads, inducing mechanical stress at the boundaries where it connects with other materials. This discrepancy in expansion behavior generates stress concentrations, which are particularly pronounced at the material interfaces.

The most critical areas for stress accumulation are the interfaces between tungsten and CuCrZr. These regions are at high risk for fatigue-induced failure, especially under repeated thermal cycling, which can lead to cumulative material damage over time. The simulation results indicate that stress levels in the CuCrZr interlayer can vary between 150 MPa and 300 MPa, while the tungsten armor experiences stress levels ranging from 500 MPa to 750 MPa under operational conditions. These observations underscore the susceptibility of the monoblock divertor to damage, particularly in high-stress areas exposed to rapid thermal changes.

Interestingly, peak stress levels were noted near the heat input zones, especially at the top surface of the divertor where heat flux is highest. As heat moves from the plasma-facing surface towards cooler regions, stress levels decrease in correspondence with the diffusion of heat. This gradient in stress distribution highlights the importance of efficient heat dissipation. By mitigating these steep temperature gradients, it may be possible to significantly reduce the mechanical strain imposed on the divertor, thereby extending its operational life.

To address these stress-related vulnerabilities, targeted design improvements could prove effective. Reinforcing high-stress areas with materials that have better resistance to cyclic thermal loads, or optimizing the layout of coolant channels, could help mitigate stress buildup. Additionally, adopting materials with similar thermal expansion properties could reduce expansion mismatches and minimize interfacial stresses. These insights into the real-time stress distribution of the monoblock divertor provide valuable guidelines for enhancing the durability and reliability of these critical components.

The identification of these stress concentration points also has direct implications for maintenance and design strategy. A proactive approach could involve monitoring stress levels in real-time to anticipate potential failure points and schedule maintenance before severe damage occurs. This approach would improve the reliability of the fusion reactor and potentially prevent catastrophic failures, which can be especially costly in a commercial fusion energy setting. By reinforcing regions known to experience high stress or by improving cooling systems to create a more uniform temperature profile, the divertor's structural integrity can be enhanced, making fusion reactors safer and more efficient in the long term.

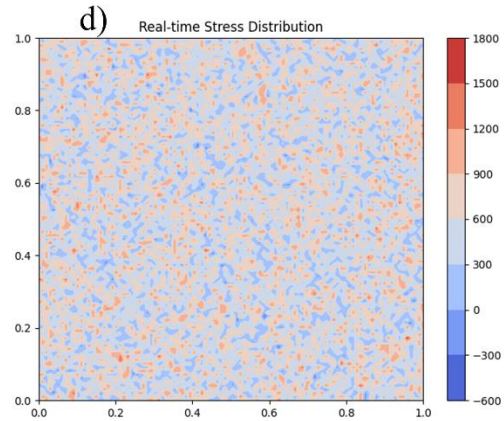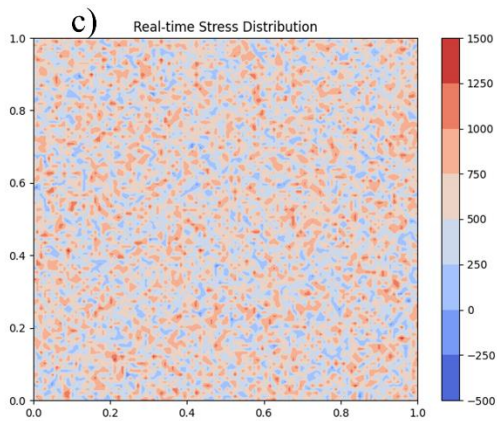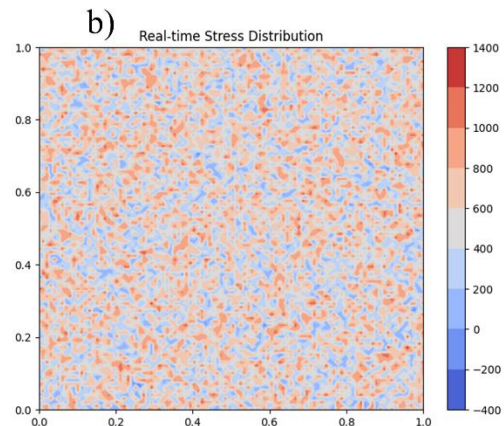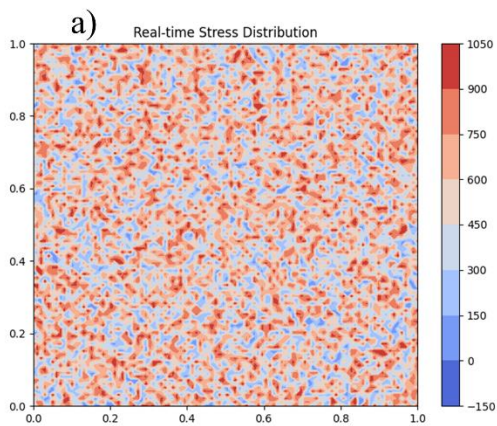

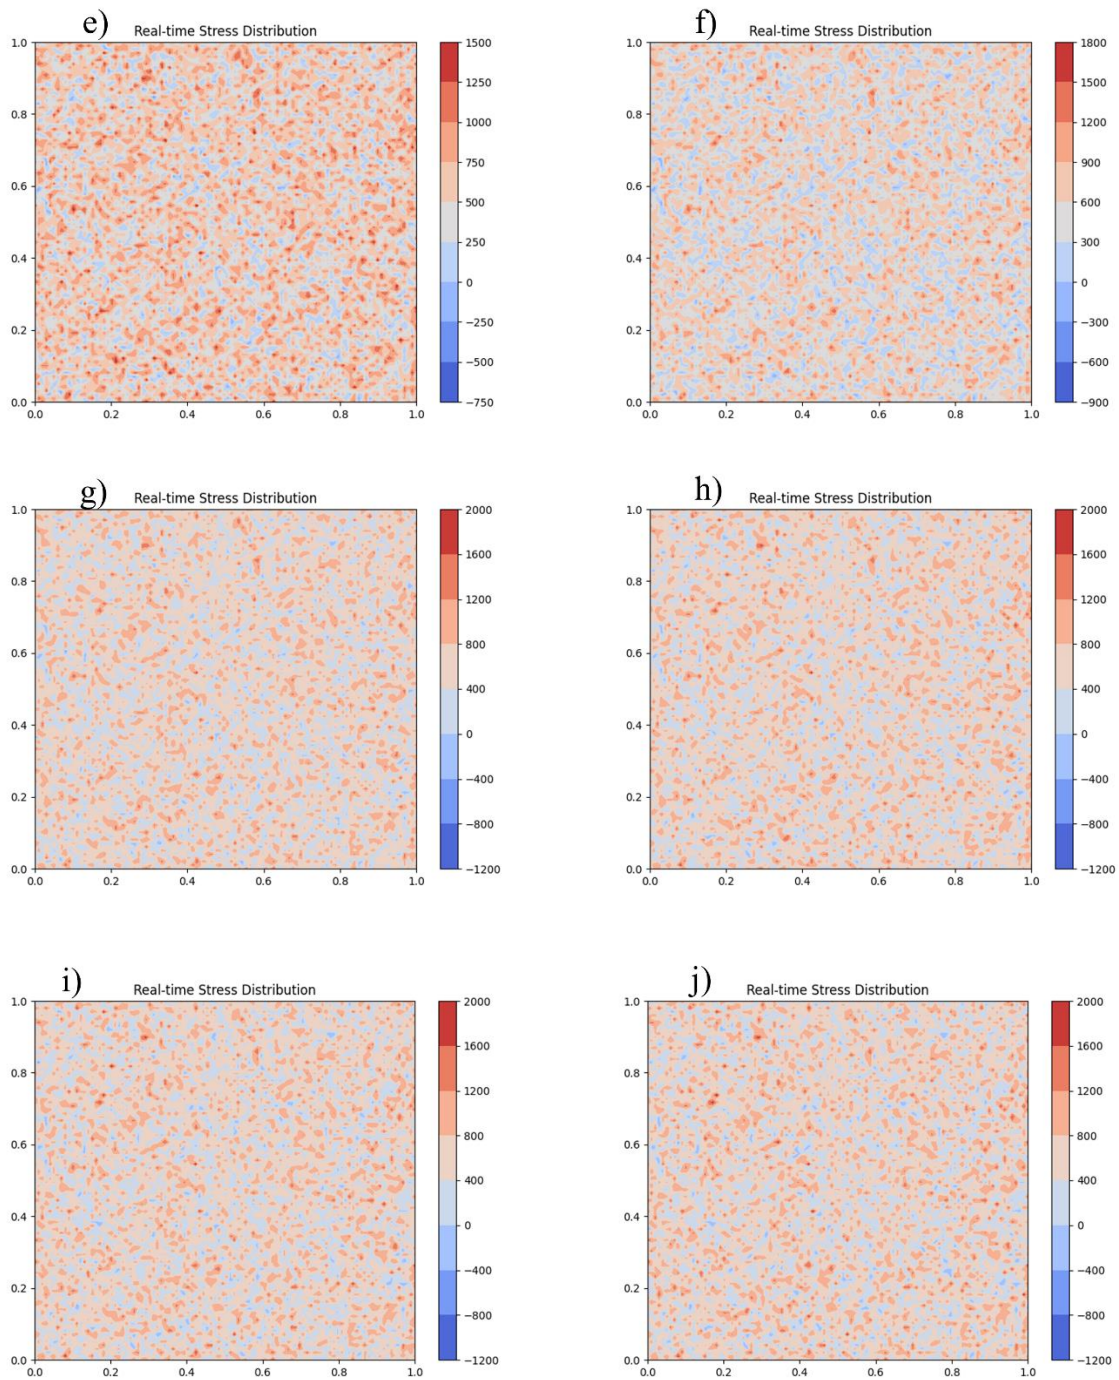
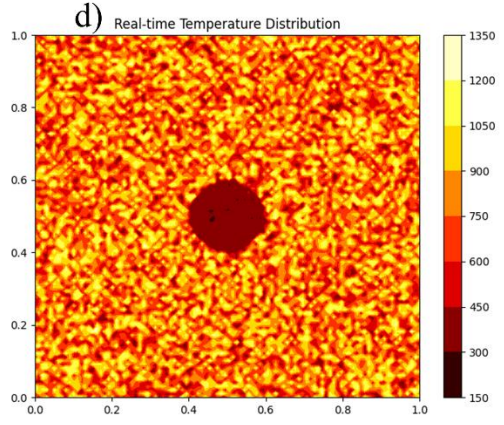
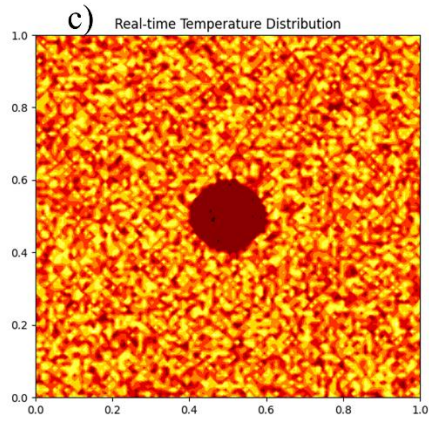
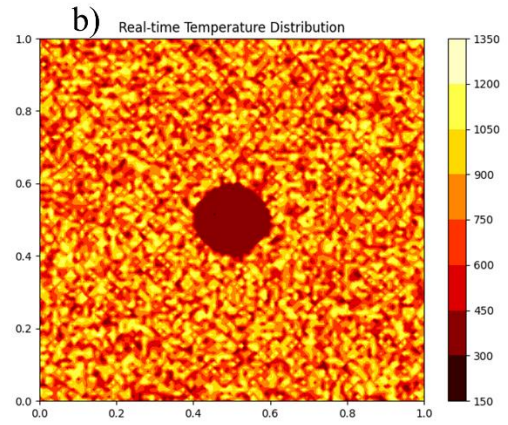
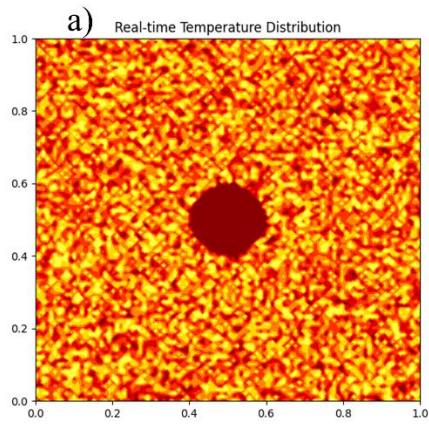


Figure 1: Real-time stress distribution across the monoblock divertor surface. (a) Initial stress distribution at time $t=0$. (b) Increased stress levels due to thermal cycling, peaking at 1400 MPa. (c) Further escalation of stress, reaching 1500 MPa. (d) Maximum stress observed at 1800 MPa in areas subjected to high thermal exposure. (e) Stress levels decrease back to 1500 MPa over time. (f-j) Overview of stress ranges across the divertor, illustrating variations from 150 to 2000 MPa, emphasizing localized stress concentrations.

3.2. Real-time temperature distribution



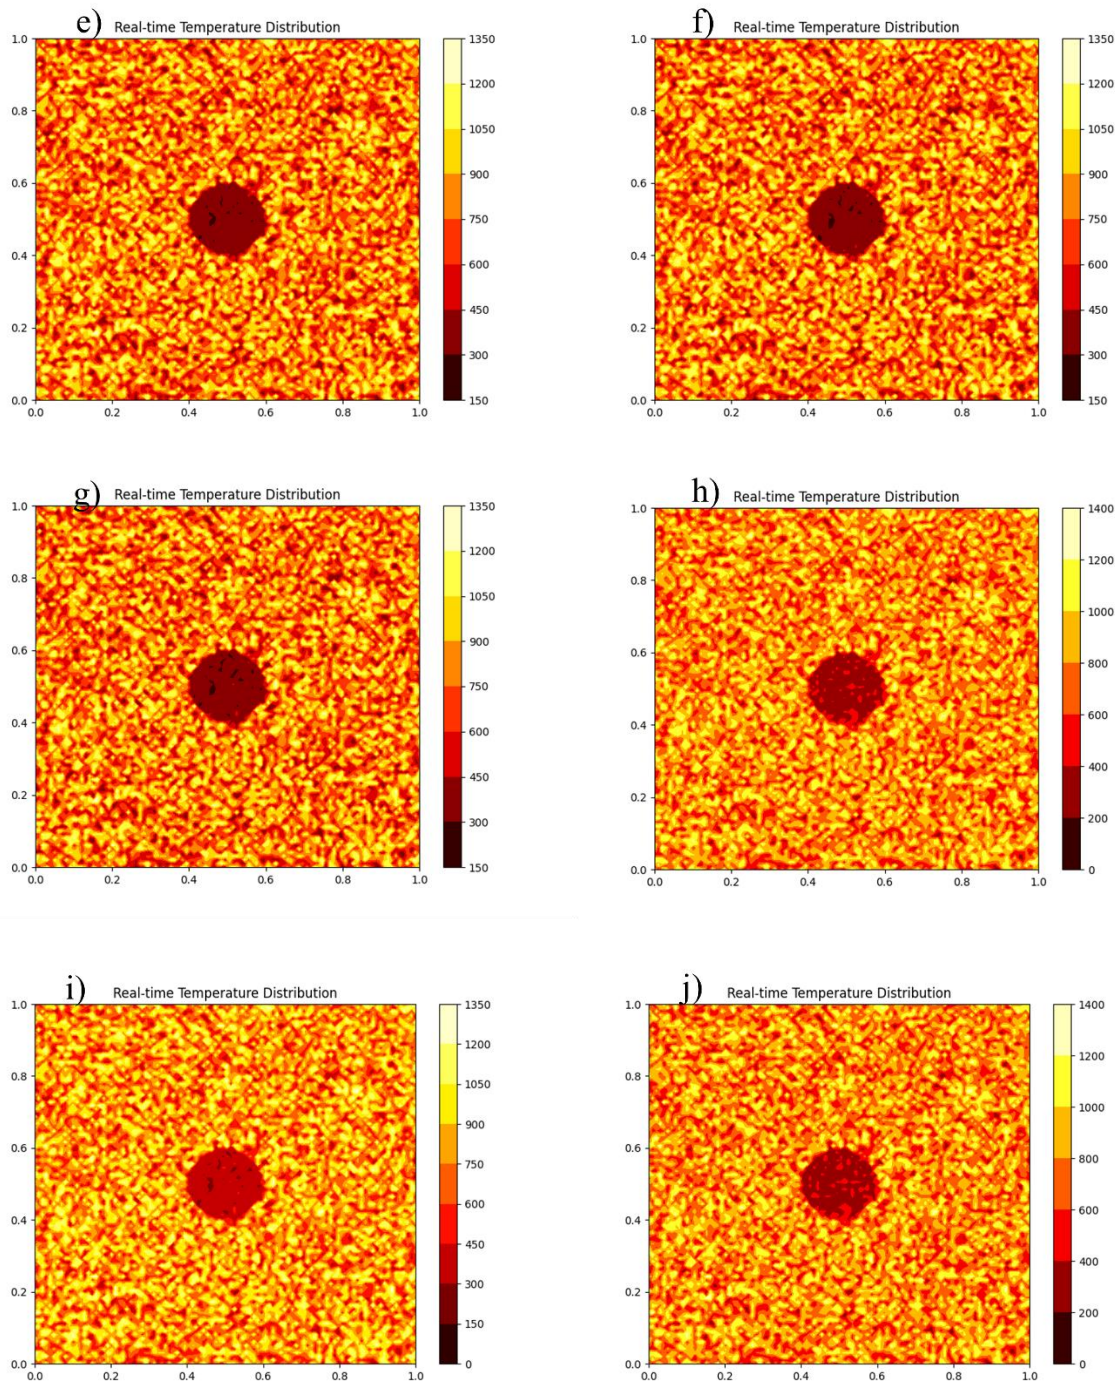


Figure 2: Real-time temperature distribution across the monoblock divertor. (a) Initial temperature distribution shows central hot spots at 1350°C and cooler regions at 300°C at $t=0$. (b-c) Gradual increase in temperature in the central area, highlighting significant gradients. (d) Steady-state temperature distribution maintains hot spots and cooler outer regions. (e-h) Stabilization of temperature fluctuations, revealing the onset of thermal fatigue and visible degradation in specific areas. (i-j) Long-term temperature profile after extensive thermal cycling, showcasing critical temperatures near the core and cooler peripheral areas.

The real-time temperature distribution within the monoblock divertor system exhibits a distinct gradient, with temperatures ranging from approximately 300°C in the cooler, outer regions to peaks of around 1200°C at central hot spots (Figure 2). This distribution is typical of fusion reactors, where the plasma-facing components endure extreme thermal loads. The central region, exposed directly to plasma, experiences the highest temperatures, while the temperature gradually decreases towards the periphery, where heat dissipates through cooling systems.

The observed temperature profile is primarily influenced by the applied surface heat flux and the thermal properties of tungsten. Tungsten's high melting point and excellent thermal conductivity allow it to effectively handle intense heat loads. However, the steep temperature gradient across the divertor results in significant differential thermal expansion, contributing to stress accumulation in the interfaces between different layers, as highlighted in the previous section.

Hot spots were identified in the central region of the divertor, where temperatures can reach up to 1200°C during peak operational conditions. These areas are particularly vulnerable to failure mechanisms such as recrystallization and thermal fatigue. Tungsten's mechanical properties degrade significantly at temperatures above 900°C, with reduced ductility and increased susceptibility to cracking. The findings from the temperature analysis are consistent with observed failure patterns in existing fusion devices, where high-temperature regions often correlate with early material degradation and failure.

The importance of managing the temperature gradient cannot be overstated. High central temperatures, coupled with rapid temperature changes during plasma disruptions, create conditions conducive to thermal fatigue. The differential expansion between the tungsten armor, the copper interlayer, and the CuCrZr cooling pipe contributes to stress accumulation and increases the risk of mechanical failure. As such, the temperature profile provides critical insights into the operational limits of the divertor and identifies regions that require enhanced thermal management.

To mitigate the effects of these extreme temperatures, optimizing the design of the cooling system is essential. Improving the efficiency of the CuCrZr cooling channels can help distribute heat more evenly, reducing the severity of temperature gradients across the divertor. By promoting more uniform cooling, the mechanical strain on the divertor components can be reduced, ultimately extending the operational lifespan of the system. Additionally, incorporating materials with improved thermal properties or utilizing enhanced cooling technologies could further alleviate temperature-driven stress.

3.3. Real-time heat flux distribution

The heat flux distribution across the surface of the monoblock divertor varies significantly, with values ranging from approximately 9 MW/m² in regions of minimal plasma interaction to peaks of 32 MW/m² in areas subjected to the most intense plasma exposure over time (Figure 3). The highest heat flux concentrations occur in the regions facing direct plasma bombardment, resulting in localized hot spots that shift and change intensity with operational conditions.

The uneven nature of the heat flux distribution leads to significant thermal gradients across the divertor. These gradients are most pronounced at the plasma-facing surface, where heat flux reaches its peak, and gradually diminish towards cooler, peripheral regions where efficient cooling channels help to dissipate heat. The fluctuating spatial heat flux is influenced by transient plasma events, such as disruptions, that cause rapid changes in local heat loads, further contributing to the uneven temperature and stress profiles throughout the component.





The areas of highest heat flux directly correlate with regions of increased mechanical stress and temperature, as discussed in previous sections. The concentrated thermal energy results in intense localized heating, causing steep temperature gradients that, in turn, induce significant mechanical strain. This strain is most severe in regions where the materials—tungsten, copper, and CuCrZr—have differing thermal properties, leading to stress buildup at their interfaces. Repeated exposure to high heat flux can cause fatigue and initiate failure mechanisms, including cracking and material embrittlement, particularly at these interfaces.

Furthermore, the heat flux distribution directly impacts thermal expansion within the monoblock. Tungsten, being subjected to intense localized heating, expands at a different rate compared to the underlying copper and CuCrZr layers, leading to additional mechanical stresses. These thermal expansion mismatches are a critical factor in the long-term stability of the divertor. As a result, regions experiencing the highest heat flux are also at the greatest risk of failure, both from thermal fatigue and from the accumulation of microcracks over time.

To address these challenges, an optimized heat management strategy is required. One approach could involve redesigning the cooling channels to ensure more uniform heat removal from the divertor surface. Improving the layout and efficiency of CuCrZr cooling pipes could help in minimizing the impact of transient heat loads, thereby reducing the intensity of thermal gradients. In particular, increasing coolant flow rates in high-risk regions could enhance heat extraction, reducing the likelihood of localized overheating and mitigating stress buildup.

Another promising approach is to integrate heat spreaders or enhance the thermal contact between tungsten and the underlying copper layer. Such measures could help distribute the heat more evenly across the divertor surface, leading to a reduction in localized hot spots and, consequently, lower mechanical stresses. In addition, utilizing more advanced materials with better thermal

shock resistance or improved heat spreading characteristics could further enhance the overall durability of the divertor under high-heat-flux conditions.

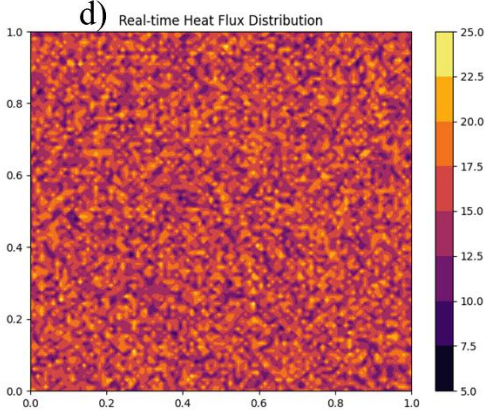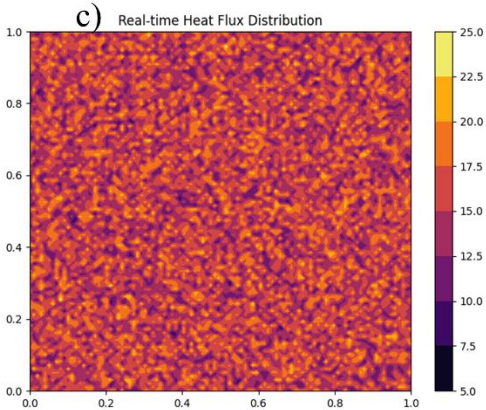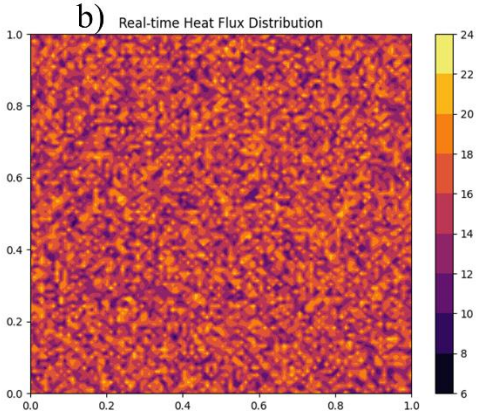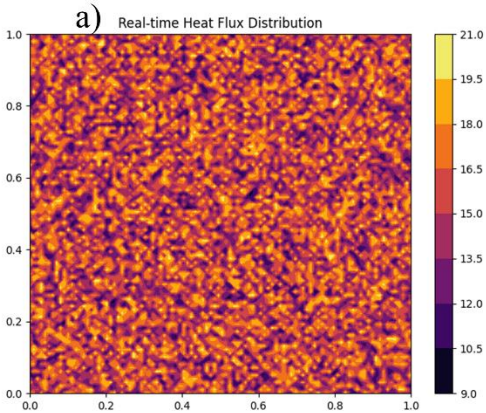

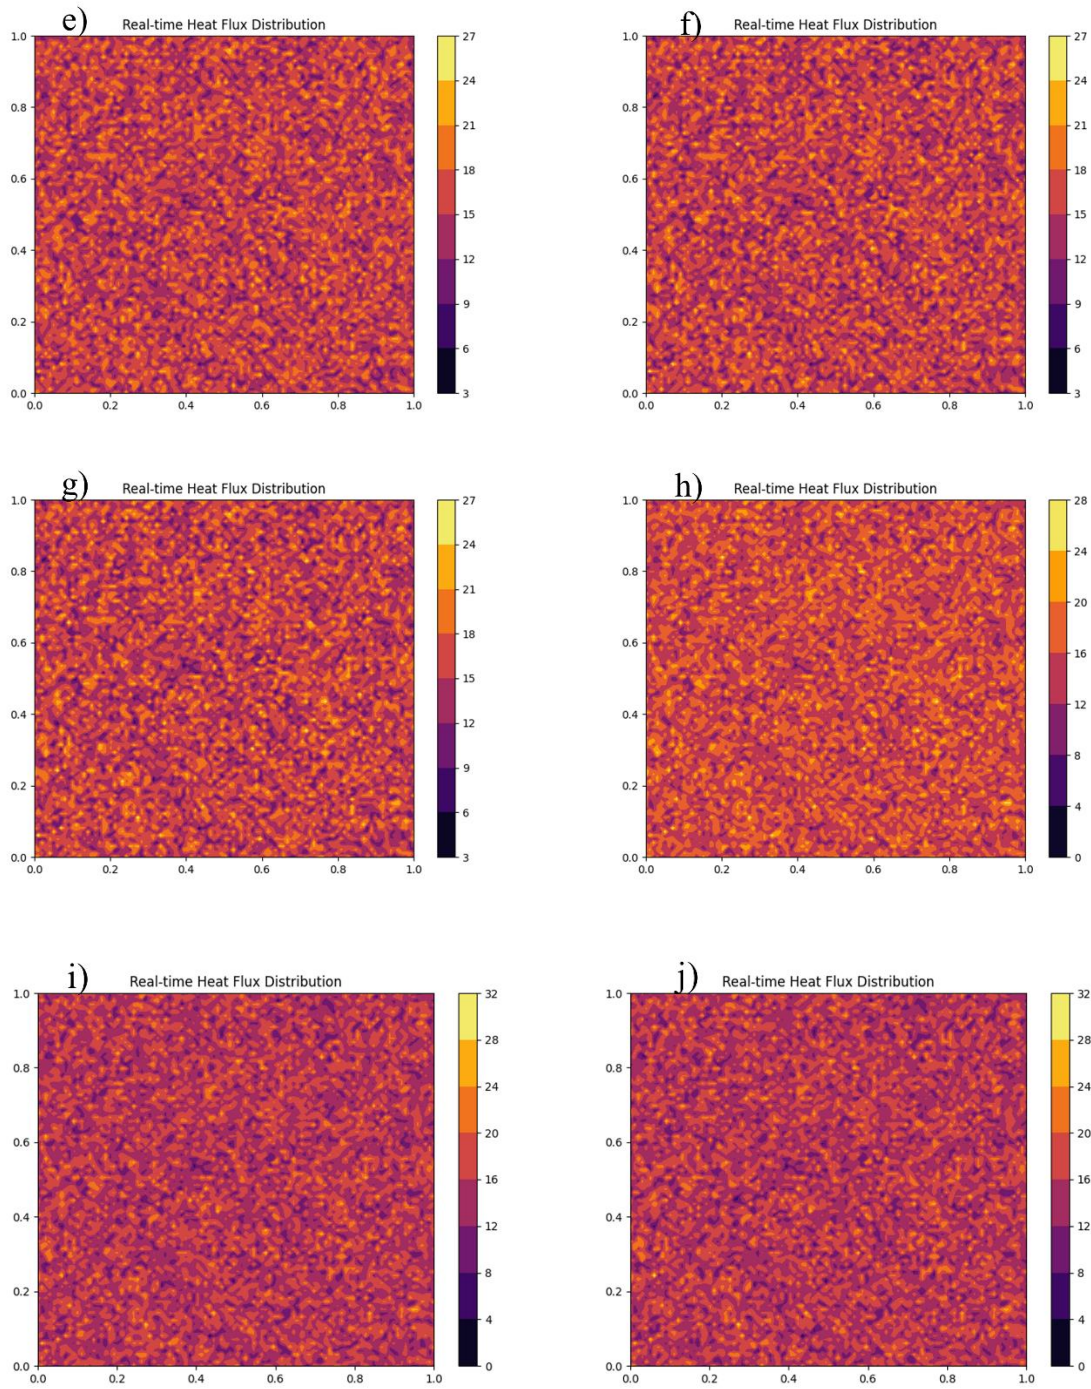
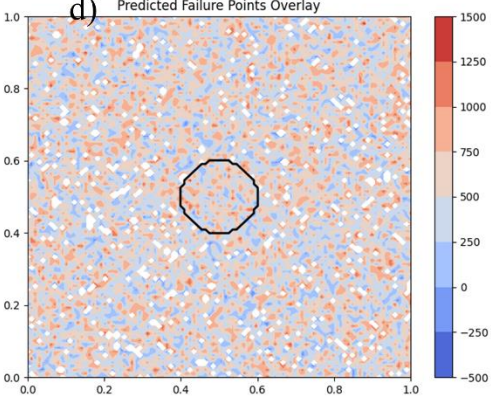
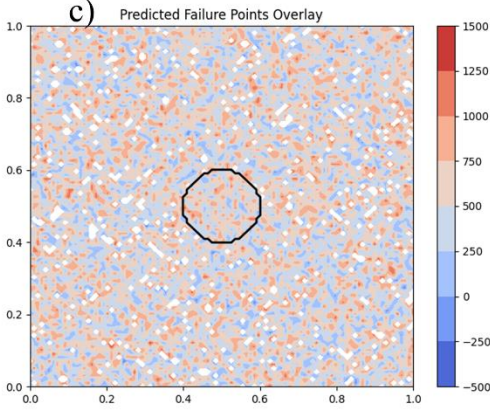
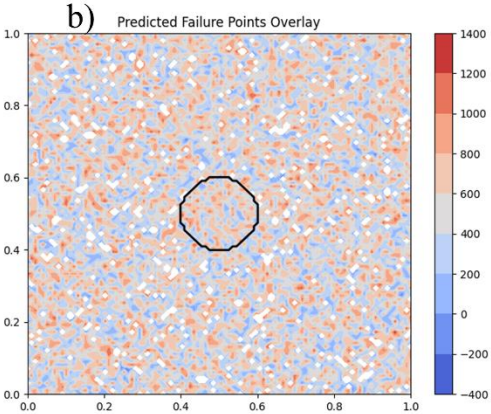
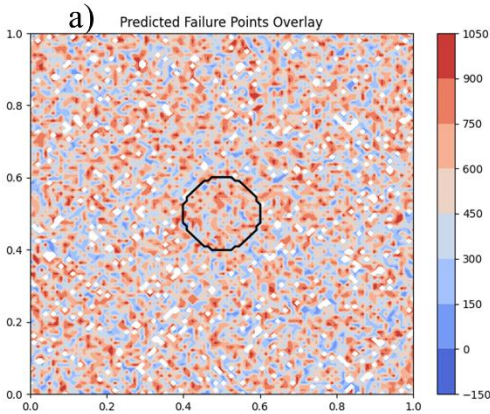


Figure 3: Real-time heat flux distribution on the divertor surface over time. Panels (a-j) illustrate the spatial variation of heat flux in MW/m², with intensity levels increasing progressively across the sequence. The colour scale indicates heat flux magnitudes, ranging from low (purple) to high (yellow). High concentrations of heat flux are observed in regions directly exposed to the plasma, which correspond to transient heat loads and localized hotspots.

3.4. Predicted failure points overlay



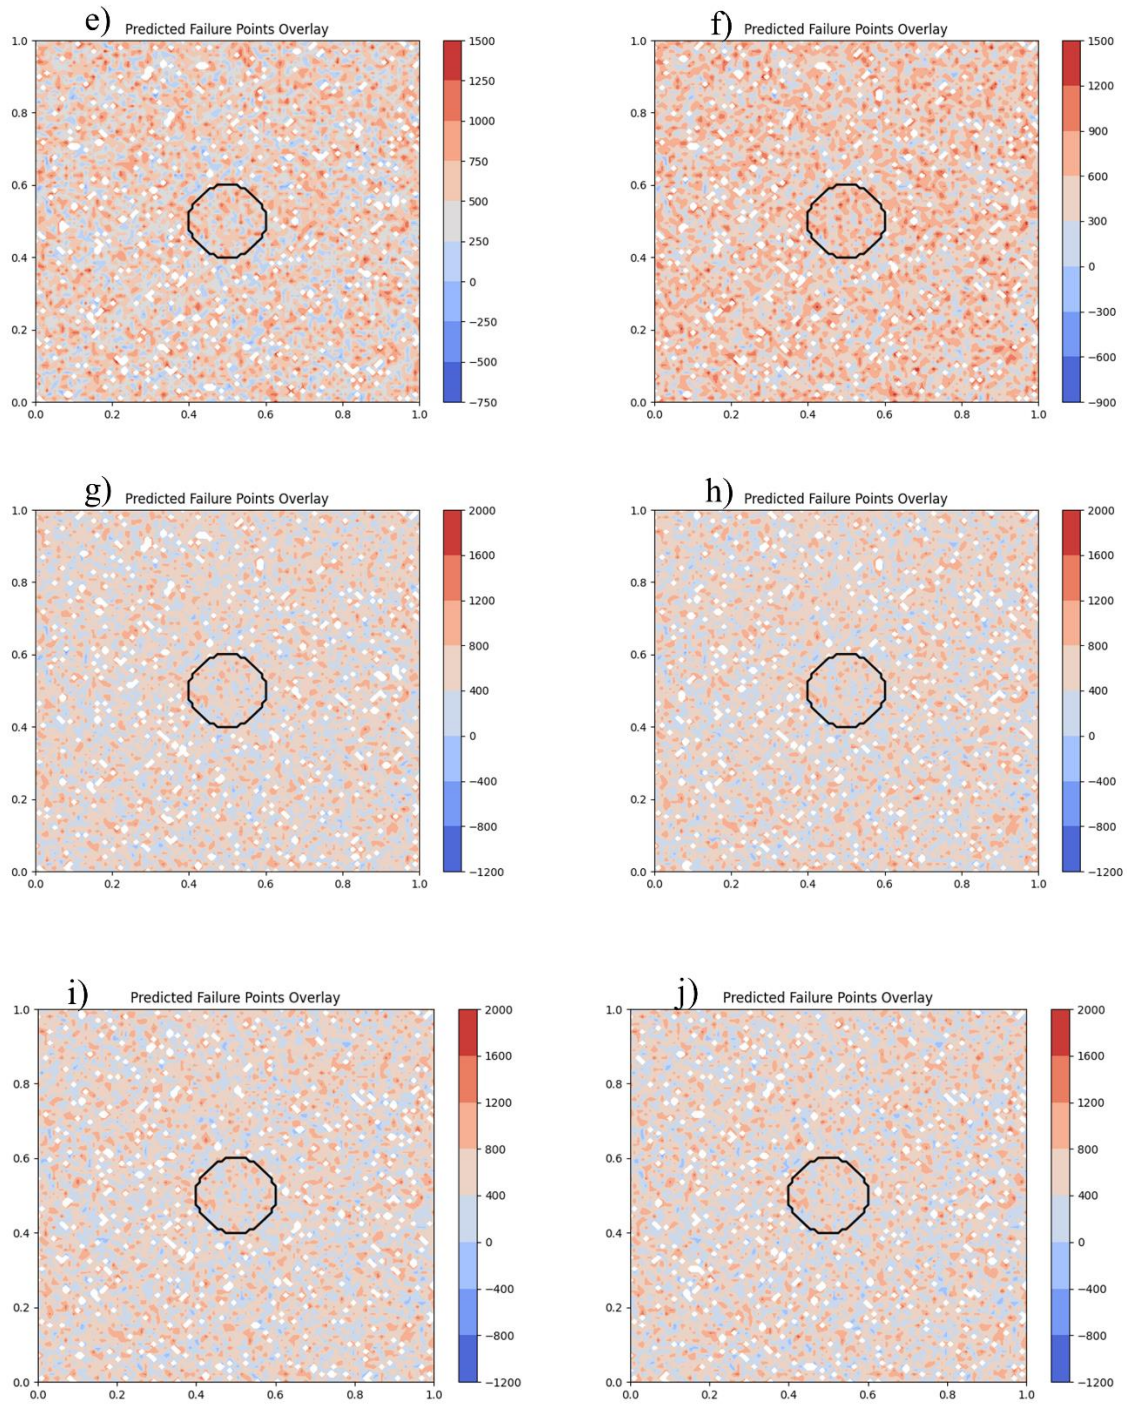


Figure 4: Overlay of predicted failure points on the divertor surface under varying operational conditions. Each subplot (a-j) represents the spatial distribution of predicted mechanical failure points, visualized through color mapping. Warmer colors (red) indicate regions of higher stress and potential failure risk, while cooler colors (blue) signify lower stress areas. The central region (marked by the black circle) consistently displays a concentration of predicted failure points, correlating with areas subjected to the highest thermal and mechanical loads.

The Gradient Boosting Regressor (GBR) model has proven effective in identifying potential failure points across the monoblock divertor system by integrating simulation data with real-time measurements of stress, temperature, and heat flux distributions. Figure 4 presents the predicted locations of these failure points, highlighting areas of elevated mechanical stress and thermal gradients. Warmer colors in the visualization (shades of red) represent regions at higher risk of failure, while cooler colors (shades of blue) indicate areas with lower risk. The central area of the divertor consistently shows a high concentration of predicted failure points, corresponding to zones that experience the most intense thermal and mechanical loads.

The central region of the monoblock, where temperatures and stress levels are highest, is particularly vulnerable to material degradation. This area is subjected to steep thermal gradients, cyclic loading, and the mechanical stress arising from differential thermal expansion between the tungsten armor and the copper-chromium-zirconium (CuCrZr) cooling pipes. Such conditions contribute to the gradual accumulation of microcracks and plastic deformation, especially in the tungsten layer. Over time, these localized effects lead to embrittlement and increased risk of crack propagation, which can compromise the overall structural integrity of the divertor.

The heat input zones, which are directly exposed to plasma, also exhibit significant failure potential. These regions endure the highest heat flux, resulting in elevated stress levels due to the rapid thermal cycling during off-normal events, such as plasma disruptions. The GBR model has identified that these high-risk zones expand and intensify as the divertor undergoes prolonged operational cycles, reflecting cumulative thermal and mechanical damage. In particular, the boundary areas where tungsten meets the copper interlayer are identified as critical stress points, likely due to the mismatch in thermal expansion coefficients between these materials.

The real-time overlay of predicted failure points offers valuable insights for improving the divertor's design and maintenance protocols. By identifying regions most susceptible to failure, engineers can focus on reinforcing these high-risk areas. One approach could involve using materials with better resistance to thermal fatigue or incorporating advanced coatings that mitigate embrittlement in tungsten. Reinforcing the bonding between tungsten and the copper interlayer could also reduce the risk of delamination and microcracking, thus enhancing durability.

Cooling system optimization is another crucial intervention to minimize failure risks. Improving the geometry and distribution of cooling channels can help ensure that heat is more uniformly distributed across the divertor surface. Targeted enhancements in coolant flow rates, particularly in areas flagged by the GBR model as prone to overheating, could effectively reduce the severity of thermal gradients, thereby minimizing mechanical strain. Ensuring uniform cooling can also help reduce the mismatch in thermal expansion across different materials, lessening the risk of stress-induced failure.

Furthermore, the GBR's ability to dynamically update predictions based on evolving operational conditions introduces the potential for a proactive maintenance strategy. This approach enables

continuous monitoring of divertor health, allowing timely interventions before catastrophic failure occurs. By utilizing real-time data to predict the regions at the greatest risk of damage, engineers can carry out preventative maintenance actions, such as targeted inspections or reinforcement of specific components, which could significantly extend the operational lifespan of the divertor and improve the overall safety of the fusion reactor.

Conclusion

This study has demonstrated the potential of integrating real-time simulations with advanced machine learning models to enhance the understanding and management of plasma-facing components (PFCs) in fusion reactors, focusing specifically on monoblock divertor systems. By combining finite element analysis (FEA) data with a Gradient Boosting Regressor (GBR) model, we have established a robust framework that can dynamically predict stress distributions, temperature profiles, heat flux, and potential failure points in tungsten-based divertors under extreme operational conditions.

The findings reveal that localized stress concentrations are primarily driven by steep thermal gradients and differences in thermal expansion between tungsten, copper, and CuCrZr layers. These stress hotspots are critical areas that are particularly vulnerable to fatigue-induced failure and microcracking. The temperature distribution analysis highlighted regions of thermal fatigue, emphasizing the importance of uniform heat dissipation to mitigate the risk of mechanical failure. Similarly, the heat flux distribution showed that areas exposed to high, uneven heat loads require targeted design modifications to manage thermal stresses effectively.

The GBR model has proven effective in predicting failure points, offering insights into high-risk areas that could benefit from reinforcement or enhanced cooling strategies. By overlaying these predictions with real-time stress, temperature, and heat flux data, the developed framework provides a proactive tool for enhancing divertor performance and safety. This digital twin approach allows for continuous monitoring, predictive maintenance, and timely interventions—critical aspects of ensuring the long-term reliability of fusion reactors.

To further improve the durability and operational efficiency of monoblock divertors, several key recommendations arise from this work. These include optimizing cooling systems to promote more uniform temperature profiles, reinforcing high-stress regions, and potentially using advanced materials that are more resistant to thermal fatigue and cyclic loading. Implementing these strategies could mitigate the risks of catastrophic failure, thereby enhancing reactor safety as fusion energy systems move from experimental to commercial stages.

This study not only advances the understanding of the thermomechanical behaviour of monoblock divertors but also illustrates the significant potential of machine learning and digital twin technologies in optimizing the design, monitoring, and maintenance of fusion reactors. The ability to predict material performance and failure points in real-time represents a major step toward

achieving resilient and efficient plasma-facing components, ultimately contributing to the realization of safe and sustainable fusion energy. By continuing to leverage machine learning and real-time simulations, future work can build on these foundations to refine predictive models and develop even more robust reactor components, paving the way for the commercialization of fusion power.

Data availability

The code utilized for generating the results and conducting the analysis presented in this paper is available for download at <https://github.com/ayobamidaramola98/Real-time-simulation/tree/main>

1. Li, X., Zhang, L., Wang, G., Long, Y., Yang, J., Qin, M., Qu, X., So, K.P.: Microstructure evolution of hot-rolled pure and doped tungsten under various rolling reductions. *Journal of Nuclear Materials*. 533, 152074 (2020). <https://doi.org/10.1016/j.jnucmat.2020.152074>
2. Zhu, D., Li, C., Gao, B., Ding, R., Wang, B., Guo, Z., Xuan, C., Yu, B., Lei, Y., Chen, J., EAST Team, the: In situ leading-edge-induced damages of melting and cracking W/Cu monoblocks as divertor target during long-term operations in EAST. *Nuclear Fusion*. 62, 056004 (2022). <https://doi.org/10.1088/1741-4326/ac3f48>
3. Domptail, F., Barrett, T.R., Fursdon, M., Lukenskas, A., You, J.-H.: The design and optimisation of a monoblock divertor target for DEMO using thermal break interlayer. *Fusion Engineering and Design*. 154, 111497 (2020). <https://doi.org/10.1016/j.fusengdes.2020.111497>
4. Nogami, S., Toyota, M., Guan, W., Hasegawa, A., Ueda, Y.: Degradation of tungsten monoblock divertor under cyclic high heat flux loading. *Fusion Engineering and Design*. 120, 49–60 (2017). <https://doi.org/10.1016/j.fusengdes.2017.04.102>
5. Xu, D., Cheng, J., Chen, P., Fu, K., Wei, B., Chen, R., Luo, L., Xu, Q.: Recent progress in research on bonding technologies of W/Cu monoblocks as the divertor for nuclear fusion reactors. *Nuclear Materials and Energy*. 36, 101482 (2023). <https://doi.org/10.1016/j.nme.2023.101482>
6. Wang, K., Xi, Y., Zan, X., Zhu, D., Luo, L., Ding, R., Wu, Y.: Failure analysis of damaged tungsten monoblock components of upper divertor outer target in EAST fusion device. *Nuclear Engineering and Technology*. 56, 2307–2316 (2024). <https://doi.org/10.1016/j.net.2024.01.041>
7. Humphrey, L.R., Dubas, A.J., Fletcher, L.C., Davis, A.: Machine learning techniques for sequential learning engineering design optimisation. *Plasma Phys Control Fusion*. 66, 025002 (2024). <https://doi.org/10.1088/1361-6587/ad11fb>
8. Mohamed, S., Po, G., Lewis, R., Nithiarasu, P.: Multiscale computational study to predict the irradiation-induced change in engineering properties of fusion reactor materials. *Nuclear Materials and Energy*. 39, 101647 (2024). <https://doi.org/10.1016/j.nme.2024.101647>
9. Piccione, A., Berkery, J.W., Sabbagh, S.A., Andreopoulos, Y.: Physics-guided machine learning approaches to predict the ideal stability properties of fusion plasmas. *Nuclear Fusion*. 60, 046033 (2020). <https://doi.org/10.1088/1741-4326/ab7597>
10. Humphreys, D., Kupresanin, A., Boyer, M.D., Canik, J., Chang, C.S., Cyr, E.C., Granetz, R., Hittinger, J., Kolemen, E., Lawrence, E., Pascucci, V., Patra, A., Schissel, D.: Advancing Fusion with Machine Learning Research Needs Workshop Report. *Journal of Fusion Energy*. 39, 123–155 (2020). <https://doi.org/10.1007/s10894-020-00258-1>
11. Pavone, A., Merlo, A., Kwak, S., Svensson, J.: Machine learning and Bayesian inference in nuclear fusion research: an overview. *Plasma Phys Control Fusion*. 65, 053001 (2023). <https://doi.org/10.1088/1361-6587/acc60f>

12. Davis, A., Waldon, C., Muldrew, S.I., Patel, B.S., Verrier, P., Barrett, T.R., Politis, G.A.: Digital: accelerating the pathway. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences.* 382, (2024). <https://doi.org/10.1098/rsta.2023.0411>
13. Liu, W., Han, L., Huang, L.: Design and optimization of molten salt reactor monitoring system based on digital twin technology. *Kerntechnik.* 87, 651–660 (2022). <https://doi.org/10.1515/kern-2022-0055>
14. You, J.H., Mazzone, G., Visca, E., Greuner, H., Fursdon, M., Addab, Y., Bachmann, C., Barrett, T., Bonavolontà, U., Böswirth, B., Castrovinci, F.M., Carelli, C., Coccoresse, D., Coppola, R., Crescenzi, F., Di Gironimo, G., Di Maio, P.A., Di Mambro, G., Domptail, F., Dongiovanni, D., Dose, G., Flammini, D., Forest, L., Frosi, P., Gallay, F., Ghidersa, B.E., Harrington, C., Hunger, K., Imbriani, V., Li, M., Lukenskas, A., Maffucci, A., Mantel, N., Marzullo, D., Minniti, T., Müller, A.V., Noce, S., Porfiri, M.T., Quartararo, A., Richou, M., Roccella, S., Terentyev, D., Tincani, A., Vallone, E., Ventre, S., Villari, R., Villone, F., Vorpahl, C., Zhang, K.: Divertor of the European DEMO: Engineering and technologies for power exhaust. *Fusion Engineering and Design.* 175, 113010 (2022). <https://doi.org/10.1016/j.fusengdes.2022.113010>
15. Li, M., You, J.-H.: Structural impact of creep in tungsten monoblock divertor target at 20 MW/m². *Nuclear Materials and Energy.* 14, 1–7 (2018). <https://doi.org/10.1016/j.nme.2017.12.001>
16. Fursdon, M., You, J.-H., Barrett, T., Li, M.: A hybrid analysis procedure enabling elastic design rule assessment of monoblock-type divertor components. *Fusion Engineering and Design.* 135, 154–164 (2018). <https://doi.org/10.1016/j.fusengdes.2018.07.014>
17. CARDELLA, A., DI PIETRO, E., BROSSA, M., GUERRESCHI, U., REALE, M., REHEIS, N., VIEDER, G.: DESIGN MANUFACTURING AND TESTING OF THE MONOBLOCK DIVERTOR. In: *Fusion Technology 1992.* pp. 211–215. Elsevier (1993)
18. Richou, M., Li-Puma, A., Visca, E.: Design of a water cooled monoblock divertor for DEMO using Eurofer as structural material. *Fusion Engineering and Design.* 89, 975–980 (2014). <https://doi.org/10.1016/j.fusengdes.2014.04.019>
19. Hirai, T., Escourbiac, F., Barabash, V., Durocher, A., Fedosov, A., Ferrand, L., Jokinen, T., Komarov, V., Merola, M., Carpentier-Chouchana, S., Arkhipov, N., Kuznetsov, V., Volodin, A., Suzuki, S., Ezato, K., Seki, Y., Riccardi, B., Bednarek, M., Gavila, P.: Status of technology R&D for the ITER tungsten divertor monoblock. *Journal of Nuclear Materials.* 463, 1248–1251 (2015). <https://doi.org/10.1016/j.jnucmat.2014.12.027>
20. Li, M., You, J.-H.: Structural impact of armor monoblock dimensions on the failure behavior of ITER-type divertor target components: Size matters. *Fusion Engineering and Design.* 113, 162–170 (2016). <https://doi.org/10.1016/j.fusengdes.2016.10.014>
21. Gao, B., Ding, R., Zhang, L., Li, C., Xie, H., Zeng, L., Yang, J., Wang, B., Zhu, D., Chen, J.: Impact of W monoblock damage on EAST operations in recent campaigns. *Fusion Engineering and Design.* 169, 112623 (2021). <https://doi.org/10.1016/j.fusengdes.2021.112623>
22. Keprate, A., Ratnayake, R.M.C.: Using gradient boosting regressor to predict stress intensity factor of a crack propagating in small bore piping. In: *2017 IEEE International Conference on Industrial Engineering and Engineering Management (IEEM).* pp. 1331–1336. IEEE (2017)
23. Nogami, S., Guan, W.H., Hattori, T., James, K., Hasegawa, A.: Improved structural strength and lifetime of monoblock divertor targets by using doped tungsten alloys under cyclic high heat flux loading. *Phys Scr.* T170, 014011 (2017). <https://doi.org/10.1088/1402-4896/aa864d>
24. Li, C., Zhu, D., Ding, R., Wang, B., Chen, J., Gao, B., Lei, Y.: Characterization on the melting failure of CuCrZr cooling tube of W/Cu monoblocks during plasma operations in EAST. *Nuclear Materials and Energy.* 25, 100847 (2020). <https://doi.org/10.1016/j.nme.2020.100847>