


- $T$  receives  $D = h_{BT} x_B + n_T$  from  $B$  (transmitting  $x_B$ ) and makes label  $L$  (idle or busy) depending on channel occupancy.
- $T$  trains classifier  $C$  with  $(D, L)$ .
- $T$  changes its classifier to  $C_{p_d}$  and makes transmission.

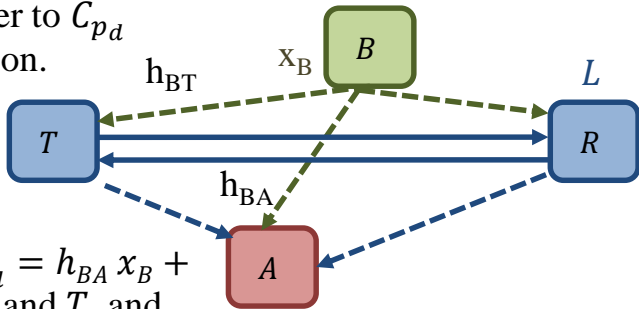

- $A$  overhears data  $D_{p_d} = h_{BA} x_B + h_{TA} x_T + n_A$  from  $B$  and  $T$ , and labels  $L$  (ACK or not) from  $R$ .
- $A$  trains classifier  $\hat{C}_{p_d}$  with  $(D_{p_d}, L)$ .