

Athermal phonon collection efficiency in diamond crystals for low mass dark matter detection

I. Kim,^{1, a} N. A. Kurinsky,² H. Kagan,³ S. T. P. Boyd,⁴ and G. B. Kim¹

¹*Lawrence Livermore National Laboratory, Livermore, CA 94550, USA*

²*SLAC National Accelerator Laboratory, Menlo Park, CA 94025, USA*

³*Department of Physics, Ohio State University, Columbus, OH 43210, USA*

⁴*Department of Physics and Astronomy, University of New Mexico, Albuquerque, NM 87131, USA*

(Dated: October 1, 2024)

We explored the efficacy of lab-grown diamonds as potential target materials for the direct detection of sub-GeV dark matter (DM) using metallic magnetic calorimeters (MMCs). Diamond, with its excellent phononic properties and the low atomic mass of the constituent carbon, can play a crucial role in detecting low-mass dark matter particles. The relatively long electron-hole pair lifetime inside the crystal may provide discrimination power between the DM-induced nuclear recoil events and the background-induced electron recoil events. Utilizing the the fast response times of the MMCs and their unique geometric versatility, we deployed a novel methodology for quantifying phonon dynamics inside diamond crystals. We demonstrated that lab-grown diamond crystals fabricated via the chemical vapor deposition (CVD) technique can satisfy the stringent quality requirements for sub-GeV dark matter searches. The high-quality polycrystalline CVD diamond showed a superior athermal phonon collection efficiency compared to that of the reference sapphire crystal, and achieved energy resolution 62.7 eV at the 8.05 keV copper fluorescence line. With this energy resolution, we explored the low-energy range below 100 eV and confirmed the existence of so-called low-energy excess (LEE) reported by multiple cryogenic experiments.

I. INTRODUCTION

Even with the growing sizes of the large-scale experiments, the dark matter (DM), which is thought to comprise approximately 85% of the matter in the universe, has so far evaded detection in terrestrial experiments [1–11]. The DM particle could have evaded direct detection if their interaction with the standard model particle produce energy deposits lower than the threshold of the conventional detectors. As a result, searches for sub-GeV “light mass” dark matter have been receiving increasing attention in recent decades [12, 13].

So far, the DM-nucleus cross-section has been poorly constrained in the sub-GeV DM mass (m_χ) range [14], primarily because the recoil energy from nuclear scattering is typically below the threshold of conventional detectors. Many significant efforts are going on to overcome this problem, either by scanning new types of interactions that were not previously accounted for, or by developing detection techniques to lower the nuclear recoil threshold. Scanning new types of interactions includes searching for DM-electron interaction [15–17], scanning for signatures from exotic dark matter models [18–20], or exploiting the theoretical “Migdal effect” where a slow nuclear recoil is thought to have a substantial probability of shaking off electrons from the nucleus, thus creating a secondary ionization signal [21–24]. On the other hand, developing lower nuclear recoil threshold includes developing entirely novel detector concepts [25–34] and improving the sensitivity of existing detectors by using advanced target material [35–38].

Diamond, in particular, has been the subject of ex-

tensive studies as an ideal candidate for the low-mass DM searches in the past few years [38–41], owing to its high Debye temperature (2220 K), high isotopic purity, excellent phonon properties, radiation hardness, good semiconductor properties, ease of handling, and the low atomic mass of carbon. The properties of diamond crystals as the DM detector target material are well summarized in Ref. [38]. So far, building detectors with bulk diamond crystals has been out of reach because of the high cost of the material. However, recent advancements in the chemical vapor deposition (CVD) techniques has enabled the production of high-quality “detector grade” diamond crystals at an affordable cost. Building a bulk detector with diamond target crystals is within realistic reach of the next generation sub-GeV dark matter detection experiments.

Crystal-based rare event searches typically measure incident particles’ energy by coupling sensors to large crystal particle absorbers. For more than a decade, quantum sensors operated at low temperatures, such as transition edge sensors (TES) and metallic magnetic calorimeters (MMCs) have been extensively used in various experiments exploring rare processes, for their high energy resolutions [42]. In particular, MMC phonon sensors feature sub-microsecond response times and high energy resolution [43], thereby providing a capability of discriminating the DM-induced nuclear recoil (NR) signals from the electron recoil (ER) signals from background radiation [44], a crucial aspect in the pursuit of a background-free dark matter search. Furthermore, MMC-based particle detectors offer high versatility by enabling the fabrication of the phonon absorber in a variety of shapes, independent

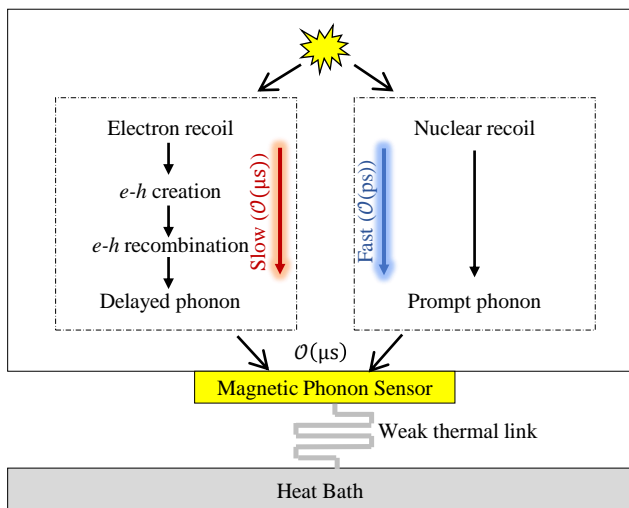


FIG. 1. Schematic diagram of phonon creation mechanism in crystal, and phonon collection scheme. See text for discussions.

of the phonon sensor’s configuration [45]. This unique aspect is enabled by the spatial separation between the phonon absorber and the MMC sensor within the detector setup. Such a design affords us the capability to fabricate the phonon absorbers in various geometries and allows us to test multiple crystals in controlled and reliable ways, without impinging upon the functionality or integration of the phonon sensor. The flexibility in design, allowing for various geometrical configurations of the absorbers, enables further innovations in detector design aimed at reducing the energy threshold even more.

In this article, we introduce a novel method for analyzing the evolution of phonons within a crystal upon collision of energetic particles. Utilizing MMC quantum sensors with sub-microsecond response times, we are testing phonon collection efficiencies and quasiparticle lifetimes of various crystals to test their efficacy as potential target materials for the sub-GeV dark matter detectors. In this work, we demonstrate that lab-grown diamond crystals fabricated via the chemical vapor deposition technique can meet the stringent quality requirements for low-threshold measurements. We also present the first low-energy measurements obtained from an MMC-based detector with diamond target, achieving energy threshold below 100 eV. Our results highlight the potential of integrating high-quality lab-grown diamond with MMC quantum sensors to significantly enhance the dark matter detection sensitivity.

II. CONCEPT

Crystal-based phonon-sensing particle detectors are typically composed of three main components: a bulk crystal absorber where particles interact, a thin gold film

that serves as a phonon collector, and a phonon sensor that measures the total energy deposited by the particle interaction. Incident particles can deposit energy in the crystal through either an NR or an ER process.

In electron recoil events (from background radiation), most initial energy is lost to generate electron-hole ($e-h$) pairs in the crystal. The electron-hole pairs recombine in a time scale ranging from a few nanoseconds to milliseconds, depending on the material and the quality of the crystals [46–50], to create athermal phonons that are collected in the metallic phonon collector. In contrast, for nuclear recoil events (expected to be from dark matter candidates or neutrons), most of the energy is lost directly to promptly excite phonons and only a part of the initial energy is deposited to excite the charge carriers. This difference in the timescale of phonon creation is key to discriminating between ER and NR, especially in applications such as dark matter searches and other rare process searches where background rejection is critical. A similar concept has been applied to detectors with scintillating crystals [45, 51], exploiting the very slow scintillation decay time at mK temperatures [52], and demonstrated good ER/NR separation. However, for semiconductor detectors like diamond, where the electron-hole recombination time is faster, on the order of microseconds, a faster sensor response time is required to achieve similar discrimination power. Figure 1 shows the detector design for the MAGNETO-DM [53] dark matter search, visualizing the concept of pulse shape discrimination (PSD) in semiconductor crystals. Fast phonon sensors of MAGNETO-DM with sub-microsecond response times will enable the discrimination between ER and NR signals.

The ability to discriminate between NR and ER signals depends mainly on three timescales: the $e-h$ pair recombination time, the phonon collection time in the crystal, and the detector response time. With the sub-microsecond response times the MMC sensors provide, the relatively long $e-h$ pair lifetimes, especially in a high-quality CVD diamond where lifetimes can exceed $2\ \mu\text{s}$ [47], can provide measurable pulse shape differences between the NR and the ER signals. Additionally, diamond’s high sound velocity enhances phonon collection efficiency, improving energy resolution and signal discrimination.

The fast response time of MMCs and their high versatility also allow us to test the phonon evolution inside the target crystal under various conditions. If an external particle hits the gold phonon collector directly, the particle energy is quickly transferred to the electron system of the metal, and all of its energy can be read by the sensor. The pulse shape of these signals provides a benchmark for how the sensor responds to a single particle energy deposition. While electron recoils directly energize conduction electrons, nuclear recoils excite energetic phonons that subsequently energize electrons. However, this time scale is in $\mathcal{O}(100\ \text{fs})$ in a thin gold film [54, 55] and does not create a measurable

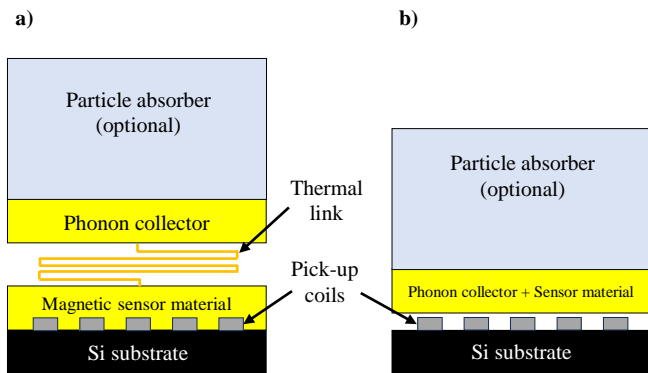


FIG. 2. Conceptual designs of the MMC-based particle detector, equipped with an optional particle absorber crystal. (a) conventional design with thermal link connecting the phonon collector and the paramagnetic sensor material. The thermal link, gold wire bond, is typically $\mathcal{O}(\text{cm})$ long. (b) next generation direct-contact setup. The paramagnetic sensor material and the phonon collector form a single body. The conventional setup was used in this work, while the direct-contact setup will be used in future.

difference in the benchmark pulse shape, even with the fast MMC sensors. Hence, the *detector response* pulse shape is always identical regardless of the type of particle, whether it is α , β/γ , or even a quasiparticle like a phonon that deposits the energy into the absorber. In contrast, in case of the crystal hit events (either ER or NR) that creates a large number of acoustic phonon inside the crystal, each phonon arrival will create a single detector response. These athermal acoustic phonons can be considered to first order as ballistic quasiparticles travelling inside the crystal, which can be reflected from boundaries, transmitted to the gold phonon collector, lost to the heat bath via the weak thermal link, or down-converted to thermal phonons. A small proportion of the athermal phonons transferred to the gold absorber may also reflect back to the crystal, but the probability is low due to the fast thermalization time in gold film. The signal induced by the particle absorbed in the crystal therefore appears as the convolution of the phonon evolution in the crystal and the detector response [56]. Hence, we can decouple the pure phonon evolution from the detector properties via deconvolving the pulse shape of the crystal hit events from the detector response.

Only the phonons arriving at the phonon collector can be read by the MMC sensor, causing some inefficiency that is heavily dependent not only on the crystal geometry but also on the properties such as the quality of the crystal lattice. Hence, quantifying the phonon evolution inside the crystal is one of the most direct ways to study the properties of crystal samples.

	8.05 keV	26.34 keV	59.54 keV
0.5mm diamond	52.4	1.6	0.1
0.3mm diamond	35.9	1.0	0.06
0.5mm sapphire	99.8	15.5	1.2
8 μm MMC sensor	95.5	44.5	5.9
300nm gold absorber	11.0	2.2	0.2
25 μm diameter gold wire	100.0	84.1	17.4

TABLE I. Photoelectric absorption probability for perpendicularly incident γ -radiations at each part of the detector setup. Quantities are in percentage.

III. EXPERIMENTAL SETUP

To test the concept of an MMC-based diamond detector, we used two small diamond crystals as test setups. In the first setup, we used a $(10 \times 10 \times 0.5)$ mm³ polycrystalline CVD (pCVD) diamond from II-VI [57]. An ²⁴¹Am source was placed over the diamond crystal with copper α blocker for energy calibration. The expected characteristic energy lines include 59.54 keV, 26.34 keV and 33.20 keV γ -rays from the nuclear decay, and the characteristic 13.9 keV $L_{\alpha 1}$, 17.8 keV $L_{\beta 1}$ and 20.8 keV $L_{\gamma 1}$ x-ray lines from ²³⁷Np. The 8.05 keV and 8.91 keV x-ray fluorescence lines from the copper served as additional calibration peaks in the low-energy region. The total event rate was controlled to be approximately 10 Hz to allow enough time for the detector to fully thermalize back to the base temperature before the subsequent event triggers. We installed MMC sensors fabricated by the Korea Research Institute of Standards and Science (KRISS) and Institute for Basic Science (IBS) with a Magnicon C6XS1 SQUID to measure the phonons in the diamond crystal. A thin gold film of 3 mm \times 1.5 mm \times 300 nm with a 2 nm Cr adhesion layer was evaporated directly onto the surface of the crystal to serve as the phonon collector. The thermal connection between the gold phonon collector and the MMC sensor was made by gold wire bonds in this measurement, as illustrated in Fig. 2 a). This connection is to be improved in future by advancing to a direct mechanical contact [44] to enhance the speed of the heat flow, as shown in Fig. 2 b). Removal of the thermal link, which is typically $\mathcal{O}(\text{mm})$, enhances the heat flow from the absorber to the sensor material, thereby increasing the speed of the signal rise.

In the second setup, the pCVD crystal was replaced with a $(5 \times 5 \times 0.3)$ mm³ single-crystal CVD (sCVD) diamond from Element Six [58]. We also tested a similar detector setup with a $(5 \times 5 \times 0.5)$ mm³ sapphire crystal as the target material as the control setup. In Table. I, the absorption probabilities for the three most prominent γ -photopeaks are summarized for the diamond and sapphire crystals. Compton scattering becomes dominant over 22 keV and 45 keV for diamond and sapphire. Only a fraction of higher energy photons would deposit the full energy to the crystal targets, especially for the diamond. By examining the relative heights of the γ -peaks in combination with the pulse shape analysis, one can identify

at which volume an event is originated from.

To ensure a complete data acquisition, a continuous stream of data was collected at 1MHz sampling rate using the 14-bit NI PXIe-5172 digitizer [59]. An SR-560 low noise voltage preamplifier [60] was installed before the digitizer to enhance the signal-to-noise ratio. The dynamic range of the device was set to capture the 59.4 keV γ pulses. 6dB/oct rolloff highpass filter was applied to mitigate low-frequency noise induced by acoustic vibration. The filtering condition was optimized for each dataset independently to address changes in noise conditions. As the thermal link via wire bonding has slowed the pulses down to have a rise time of a few tens of μ s, the high-frequency cutoff at 1 MHz did not affect the analysis. While discriminating the NR and the ER events is beyond the scope of this article, a higher bandwidth may be required in future work for the particle discrimination. For the sapphire control setup the sampling rate was limited to 0.5 MHz.

Two sets of measurements were made separately for each diamond crystal. The first sets of measurement focused on achieving high energy resolution dataset with heavy high-pass filtering, to precisely study the energy deposition by incoming particle to various volumes comprising the detector. In the second sets of measurement, we used minimal high-pass filtering for the pulse shape analysis. Measurement times were longer for the sCVD, as its volume was 6.7 times smaller than the pCVD. The details of the two measurements are summarized in Table II.

IV. ANALYSIS

A. Pulse shape discrimination

The MMCs can read out phonons from any part of the setup if their energy can be transmitted to the sensor. The detector setup used for this experiment is composed of: the diamond crystal, the gold phonon collector, the Au:Er MMC sensor material, and the silicon substrate on which the MMC is deposited. An external particle can deposit energy to any of these materials. The heat flows sequentially in the order of the crystal, the gold phonon collector, the weak thermal link, the MMC sensor, and the substrate where it flows out to the bath. Hence, the pulse rise time is the fastest in the sensor and the slowest in the crystal. On the other hand, the decay times of the events occurring in the collector and the sensor will be the same, as they are fully thermalized within $\approx 100 \mu$ s. For crystal events, however, the thermal phonon contribution produces a continuous heat input to the phonon collector ($\mathcal{O}(\text{ms})$), slowing down the decay of the pulses. This capability of the pulse shape discrimination (PSD) enables the unique study about the phonon evolution inside the crystalline absorber.

While the waveforms of the crystal-hit events are affected by the phonon dynamics inside the crystal, the

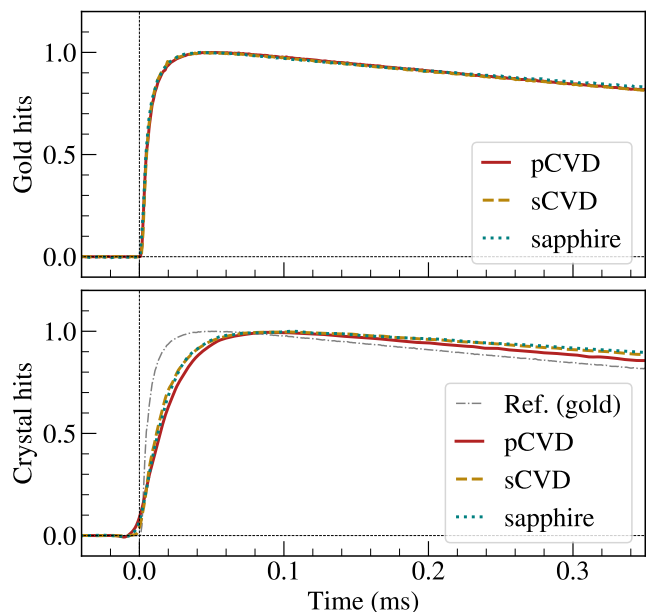


FIG. 3. Comparison of the 59.54 keV events in three different datasets. (top) gold-hit events. Good agreement between waveforms demonstrates the identical detector responses in three different measurements. (bottom) crystal-hit events. pCVD crystal shows lower thermal component.

waveforms of the gold-hit events are invariant upon change of crystals. As the geometry of the detector setup was controlled to be identical in all measurements aside from the target crystal, the detector responses in the three measurements would also be identical, as demonstrated by the 59.54 keV gold-hit waveforms in Fig. 3. The three waveforms from minimal filtering datasets showed extremely good agreement with one another. This serves as an important control when comparing phonon dynamics inside different crystals. Any difference in crystal-hit waveforms must originate from the difference in the target crystal.

We applied two trapezoid filters [61] with different shaping parameters identically to the high-resolution datasets and the sapphire control set to extract the energy of the incident particle and the pulse shape information. The long trapezoid with the shaping time of $\tau_{\text{shape}} = 100 \mu$ s and the flattop time of $\tau_{\text{flat}} = 60 \mu$ s was used to estimate the incident particle's energy. The short triggering trapezoid with $\tau_{\text{shape}} = 5 \mu$ s and $\tau_{\text{flat}} = 1 \mu$ s was primarily used for triggering. As the short trapezoid only covered the rising part ($< 50 \mu$ s) of the waveforms, the height ratio of the two trapezoids $R_{\text{short/long}}$ measured how fast a pulse rises to its maximum. Fast-rising pulses have higher values of $R_{\text{short/long}}$.

Figure 4 illustrates $R_{\text{short/long}}$ vs. E distribution of events from three different setups: pCVD diamond (top), sCVD diamond (middle), and the sapphire control setup (bottom). In the sapphire control setup, distinct bands of events at 3 different values of $R_{\text{short/long}}$, at

	Setup 1-1	Setup 1-2	Setup 2-1	Setup 2-2	control
Crystal	poly CVD	poly CVD	single CVD	single CVD	sapphire
Dimension (mm ³)	10 × 10 × 0.5	10 × 10 × 0.5	5 × 5 × 0.3	5 × 5 × 0.3	5 × 5 × 0.5
Dataset	High resolution	Minimal filtering	High resolution	Minimal filtering	Control
Temperature (mK)	<10	<10	<10	<10	<10
Collection time (hours)	3.96	3.47	8.92	15.3	4.17
Sampling rate (MHz)	2	1	1	1	0.5
Bandwidth (kHz)	[0.1, 300]	[0.1, 500]	[0.1, 500]	[0.1, 500]	[0.1, 250]
Filtering frequency (kHz)	[0.5, -]	[0.1, -]	[1, -]	[0.1, -]	[0.1, -]

TABLE II. Measurement details of the two diamond setups and the sapphire data control setup.

≈ 1.8 , 1 and 0.8 could be identified. Each band exhibits distinct spectral lines from the external ²⁴¹Am source as expected, but at different amplitudes. This is an indication that there existed three main thermal volumes that comprise the detector setup, and that events in the slowest group (i.e., the group with the lowest values at $R_{\text{short/long}} \approx 0.8$) transmit the lowest energy to the sensor. We identified each cluster as the sensor hits, the gold phonon absorber hits, and the crystal hits from the fastest to the slowest. In the pCVD data, the limitation in the gain-bandwidth-product (GBP) limited the fastness of the rising component for the larger pulses, and the sensor hits above ≈ 20 keV were smeared into the gold-hit events band. In sapphire data, the most prominent 59.54 keV γ -line in the gold absorber cluster were connected to the crystal-hit cluster at ≈ 45 keV by a diagonal feature, indicating a transition from one volume to another. Similar clustering was observed for the diamond crystals as well. The events were separated into three distinct bands as in the sapphire setup. The diagonal feature similar to what's observed in the sapphire data was again observed in the sCVD data to connect the 59.54 keV gold-hit events and the ≈ 20 keV cluster in the crystal hits, but the feature was not seen in the pCVD data. Instead, an additional feature with slower rise times and energy deposits slightly less than the gold hit events was observed in both pCVD and sCVD datasets (Fig. 5). These events were again connected to the gold-hit clusters with diagonal components, but at pulse amplitudes of $\approx 95\%$ of the gold-hit events and rise times even slower than the slow band.

The top two plots in Fig. 6 compares the mean-time (τ_{mean}) vs. energy distributions in the two high-resolution diamond datasets. The difference in the absolute values of τ_{mean} was originated from the difference in the filtering conditions. The pCVD crystal (Fig. 6 a)) exhibited the two distinct clusters of events at energies slightly lower than 59.54 keV and 26.34 keV, with $\tau_{\text{mean}} \approx 228$ μs clearly separated from the band at $\tau_{\text{mean}} \approx 220$ μs . The count ratios $A_{\text{crystal}}/A_{\text{absorber}}$ at 59.54 keV and 26.34 keV were 0.045(4) and 0.06(1), respectively. The ratio between the two numbers agreed with the ratio derived from Table I, $(0.1/0.2)/(1.6/2.2) \approx 0.7$. In the sCVD high-resolution dataset, an increase in the event rate at ≈ 20 keV was identified, at the mean-time value $\tau_{\text{mean}} \approx 215$ μs which was identical to the

high-energy band. The bottom two plots in Fig. 6 shows the energy spectra of the gold absorber hits (c)) and the crystal-hit candidates (d)), normalized by the exposure and their areas. The gold absorber hit spectra from the two high-resolution datasets agreed well. For the crystal hits, the spectra agreed well above 40 keV except at ≈ 58 keV, where the pCVD data exhibited a peak structure. In the lower energy region < 25 keV, the sCVD data showed an increase. We therefore conclude that majority of the pCVD crystal hits produce slower events with high phonon collection efficiency, while the sCVD crystal hits produce signals with lower phonon collection efficiency and inseparable from the high-energy band.

Similar features appeared in the minimal-filtering datasets as well. Figure 7 features the shapes of pulses from different clusters in the pCVD dataset as a representative. We selected the 59.54 keV γ -lines from the sensor hits, the gold hits, and the crystal hits; and averaged pulses to examine the pulse shape differences. The pulses had similar decay times, while having significantly different rising parts. This indicates that they follow the same heat flow model as previously explained, and the new features in the diamond crystals also originated from the diamond crystals.

The fast response of the MMC sensor in combination with the long phonon lifetime inside the diamond crystal would also enable the particle discrimination between α and β/γ events as explained above, which is not covered in this work.

B. Phonon evolution inside the crystal

The collection efficiency of phonons created inside the crystal can be estimated to first order by comparing the pulse amplitude ratios of the events depositing energy to the crystal and the events depositing the same amount of energy directly to the absorber. This first-order approximation is valid as the decay time in our setup is much longer than the rise time. For example, the ratio of the crystal hit amplitudes to the gold hit amplitudes at 59.5 keV, $E_{\text{crystal}}/E_{\text{gold}}(59.5\text{keV})$, was much larger for the pCVD than for the sCVD and for the sapphire. Hence we know that the phonon collection efficiency is greater for the pCVD. However, the shape differences between the crystal hits and the gold hits cause second-order ef-

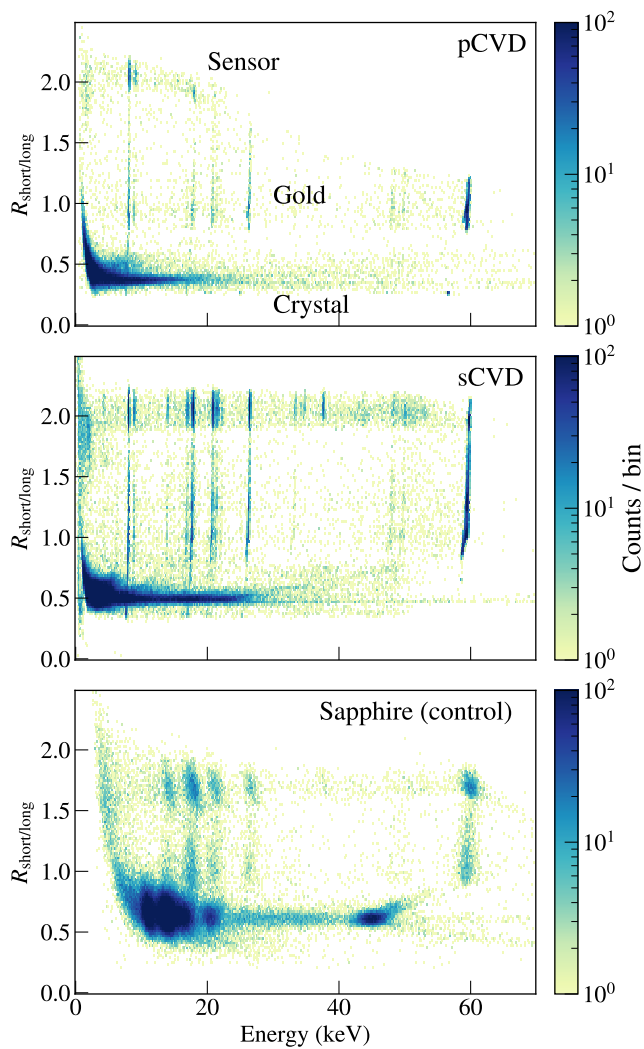


FIG. 4. 2D histograms showing the ratio of the two trapezoid heights $R_{\text{short/long}}$ vs. energy deposited to the sensor for three different setups, each of which calibrated with their crystal events at $R_{\text{short/long}} \approx 1$. (top) result from the pCVD diamond crystal. (middle) result from the sCVD diamond crystal. (bottom) result from the control setup with sapphire absorber.

fects that hinder the accurate calculation of the phonon collection efficiency. To fully account for the phonon evolution inside the crystal at finite time scales, the full phonon dynamics in the detector should be considered. This can be achieved by deconvolving the pulse shape of the crystal hit events by the detector response.

In practice, extracting the phonon evolution information with this method is not trivial, as the deconvolution process is strongly affected by the presence of high-frequency noise which persists even after the averaging. We therefore conducted a preliminary study by first fitting the waveforms to analytic functions and deconvolving the fit functions to extract the shape information on the phonon evolution. Figure 8 illustrates an example

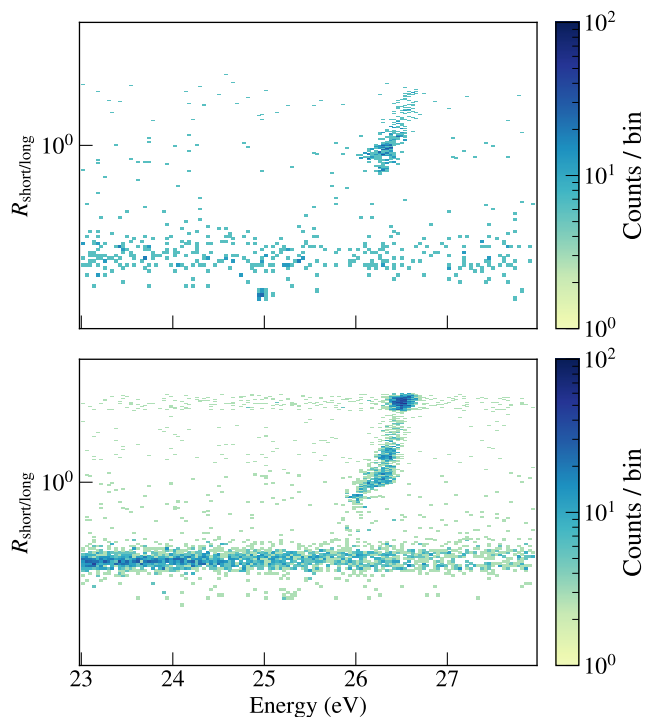


FIG. 5. The additional clusters of events observed in the diamond datasets. (top) pCVD data. (bottom) sCVD data. The new clusters are connected to the gold-hit events, and the pulse amplitudes are $\approx 95\%$ of the gold-hit events. Counts are normalized by their measurement times.

of this process. The deconvolved waveform gives the information about the phonon arrival at the gold phonon absorber. The shape parameters extracted from this preliminary analysis were used as initial fit parameters in the final efficiency calculation.

In Fig. 9, we compared the phonon arrival times in three different crystals. Each crystal exhibited a distinct transition from a fast component to a slower component near $200 \mu\text{s}$. The fast component, characterized by a prompt rise, represents the immediate phonon transmission induced by the energy deposition of an incident particle. High-energy athermal phonons have high interaction probability with electrons within the phonon absorber, generating a prompt thermal signal that is read by the MMC sensor [56]. On the other hand, the slow component indicates that some phonons are absorbed by the detector with a delay of a few milliseconds, corresponding to thermalized phonons with much weaker interactions with electrons in the metal film [56]. Although the contribution of the thermal component is small compared to the prompt component, it has a significant impact on the waveform when convolved.

In this study, we focused on the analysis of the athermal phonon contribution. Absolute quantification of the thermal component is challenging as the contribution of the thermal component in the raw waveform is at a similar frequency to the low-frequency acoustic noise present

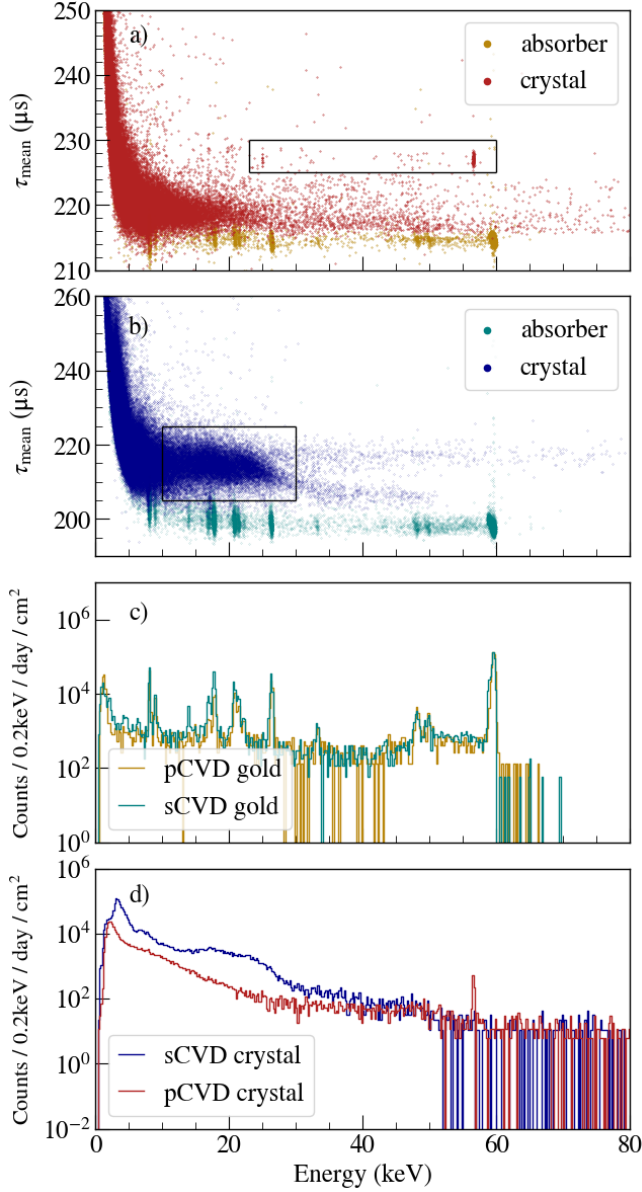


FIG. 6. Events distribution in pCVD and sCVD crystals. a) τ_{mean} vs energy in pCVD crystal. b) τ_{mean} vs energy in sCVD crystal. Crystal-hit candidates from the ^{241}Am γ -sources are selected. c) comparison of gold absorber energy spectra between the pCVD and the sCVD. d) comparison of crystal-hit spectra between the pCVD and the sCVD.

in our data. The thermal phonon analysis may be affected by the 100 Hz high-pass filter that was applied to reduce the vibration-induced low-frequency noise. An improved setup, with significantly reduced vibrational noise, a carefully adjusted detector response, and a reduced source rate to minimize pileups, will help accurately quantifying the thermal phonon contribution.

The deconvolved phonon evolution can be modelled using a linear combination of four exponentially decaying components:

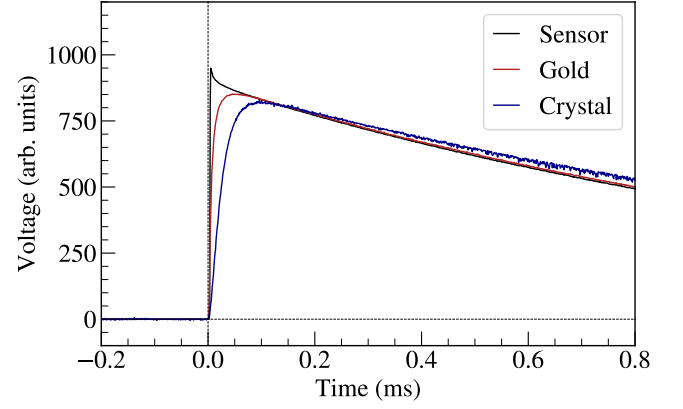


FIG. 7. Pulse shapes of the 59.54 keV γ -ray events hitting different parts of the pCVD detector setup.

	pCVD	sCVD	Sapphire
Dimension (mm^3)	$10 \times 10 \times 0.5$	$5 \times 5 \times 0.3$	$5 \times 5 \times 0.5$
$\mathcal{E}_{\text{athermal}}$ (%)	99.8 ± 2.3	39.3 ± 2.7	73.1 ± 2.7
$\mathcal{E}_{\text{height}}$ (%)	95.4 ± 0.5	45.6 ± 3.2	76.2 ± 1.7
$\mathcal{E}_{\text{area}}$ (%)	99.6 ± 0.6	45.6 ± 4.8	83.8 ± 2.2

TABLE III. Phonon collection efficiency calculated using three different methods.

$$V(t > \tau_0) = \sum_{i=1}^4 A_i \exp\left(-\frac{t - \tau_0}{\tau_{d,i}}\right), \quad (1)$$

where τ_0 is the pulse onset time, $\tau_{d,i}$ is the i -th decay time constants, and A_i is the amplitude of that component. The result of the fit to the model is illustrated in Fig. 10. We defined the two fast components with decay times below 100 μs as the athermal phonon contribution and the two slow components to be the thermal phonon contribution.

Utilizing the results from this preliminary study, we extracted the phonon evolution information from the raw waveforms. We found the set of phonon evolution parameters that reproduced the crystal-hit waveforms when convolved with the gold-hit waveform. The averaged gold-hit waveform was used as the kernel to minimize the effect of noise, and the convolved waveforms were fit to 20 single crystal-hit waveforms by minimizing χ^2 . Pulses were wavelet-denoised to mitigate the high-frequency noise without affecting the waveforms. By convoluting the athermal and the thermal phonon evolutions separately with the detector response again, we modeled the energy flow purely due to the individual components, as illustrated in Fig. 11.

Since the area A of a heat pulse represents the total energy deposit, the athermal phonon collection efficiency $\epsilon_{\text{athermal}}$ can be calculated by:

$$\epsilon_{\text{athermal}} = \frac{A_{\text{athermal}}}{A_{\text{gold}}}, \quad (2)$$

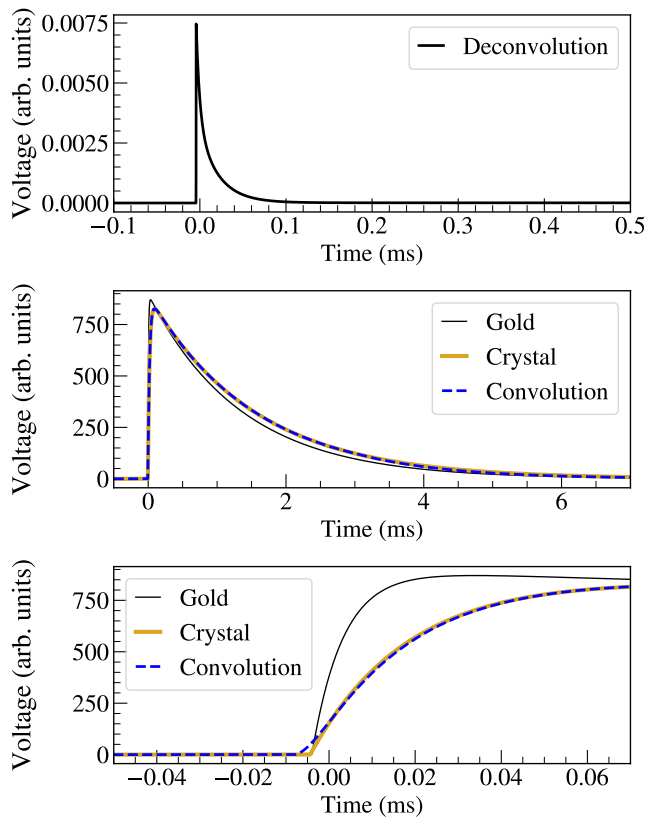


FIG. 8. Phonon arrival information extracted by deconvolution from pCVD minimal-filtering data. (top) phonon evolution inside the crystal obtained from deconvolution. (middle) Comparison of the gold-hit and the crystal-hit event, superimposed with the signal reconstructed by convolution. (bottom) the same plot zoomed into the rising edge. The small deviation at pulse onset is due to the limited detector bandwidth.

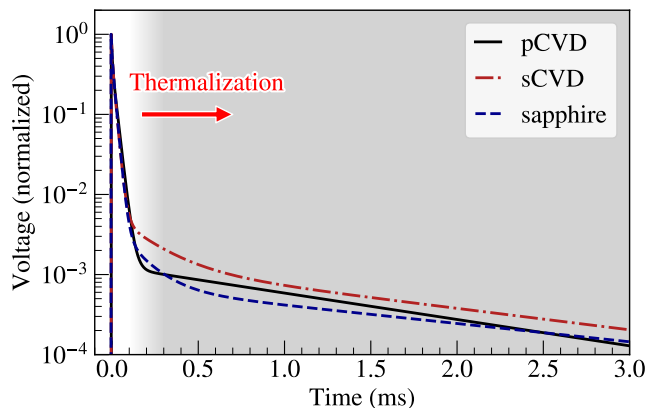


FIG. 9. Phonon evolution model inside crystals. There are clearly separable fast and slow components in all three crystals.

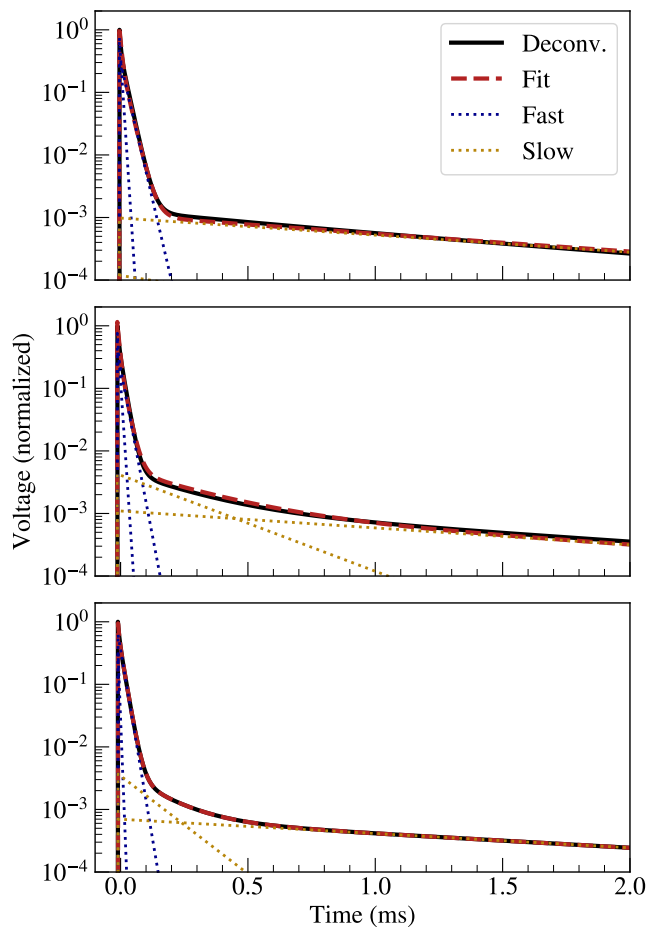


FIG. 10. Phonon evolution inside the crystals. (top) the pCVD diamond crystal. (middle) the sCVD diamond crystal. (bottom) the control setup with sapphire absorber.

where A_{athermal} is the area of the 'fast' component and A_{gold} is the total area of the gold-hit event for equal energy deposited. The deficit in the efficiency represents the energy loss. Table III summarizes the athermal phonon collection efficiencies of different setups. The first-order approximations using the pulse amplitudes $\mathcal{E}_{\text{height}}$, and using the total area $\mathcal{E}_{\text{area}}$, are also presented for comparison. One can see that the athermal phonon collection efficiency of the pCVD diamond was the largest among the three samples we tested, in spite of the large crystal size. To the first order, the total phonon collection efficiency calculated using the deconvolution method matched well with the simple approximations. In theory, the collection efficiency estimation by the area should account for both the athermal and the thermal contributions in an ideal setup, but this efficiency also approaches towards the athermal phonon collection efficiency in practice, as the contribution from slow thermal phonon is diffused by the limited detector bandwidth, the presence of the noise, and the applied high-pass filter for the acoustic noise mitigation.

The huge difference in the collection efficiency between

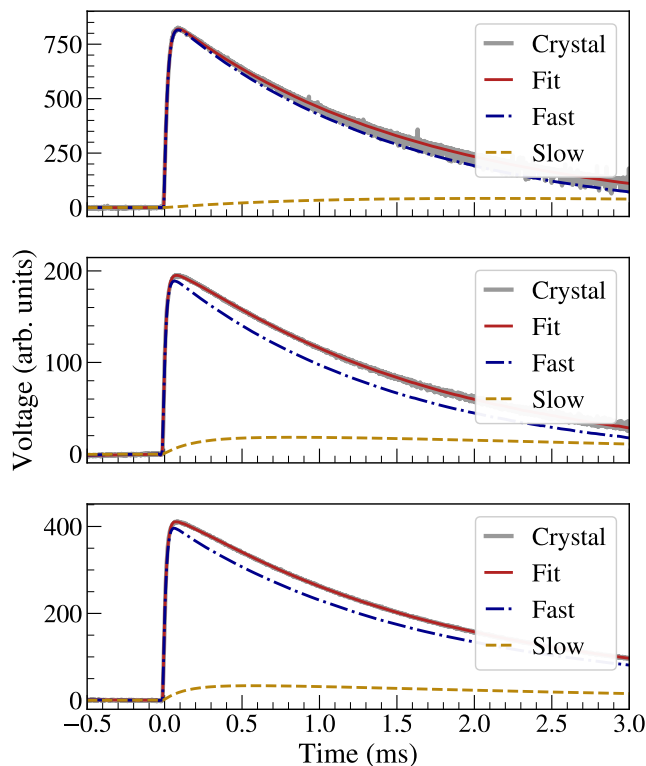


FIG. 11. Comparison of the phonon evolution. (top) the pCVD diamond crystal. (middle) the sCVD diamond crystal. (bottom) the control setup with sapphire absorber.

the two diamond setups shows that the athermal phonon collection efficiency does not only depend on the chemical properties of the material, but also on the production process, or more generally, on the quality of the crystal. Thus, the low temperature detector setup using the MMC sensors could be a direct way of testing the phonon properties and the quality of various crystals with a fast turnaround. Our results re-verifies the previously reported results on the diamond detector studies, that the pCVD can exhibit good properties comparable to the sCVD crystals if the crystal quality is high [62, 63]. This could be an evidence that the phonon transmission is affected more by the crystal quality than by the grain boundaries.

C. Low-energy measurement

The high phonon collection efficiency observed from the pCVD diamond, which led to a high energy resolution, enables a diamond-based detector to detect recoil signals at $\mathcal{O}(10)$ eV energy range. In combination with the low nuclear mass of the carbon atoms forming the crystal, the diamond-based low temperature detector can be sensitive to nuclear recoils induced by sub-GeV dark matter particles down to $\mathcal{O}(100)$ MeV.

We examined the energy resolution of the diamond-

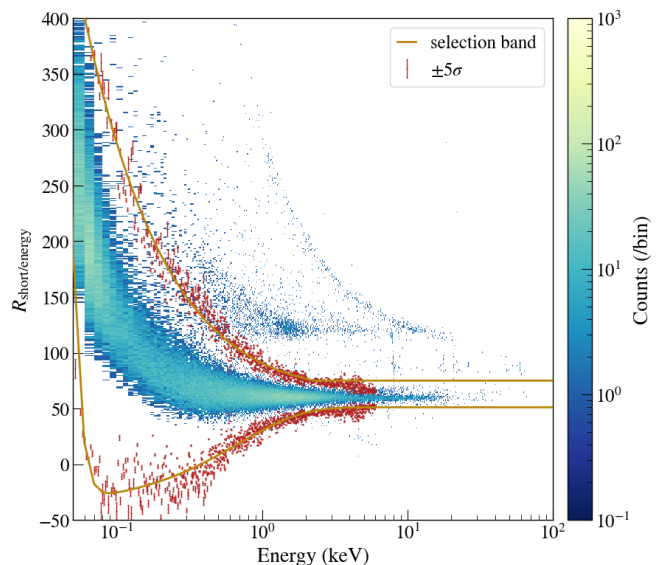


FIG. 12. Fastness vs. M_c scatter plot and the $\pm 5\sigma$ selection band.

based detector using the 8.05 keV copper fluorescence peak in the high-resolution dataset. Since the MMC sensors measure heat flow without being affected by quenching, the NR and the ER signals in our measurements follow a similar calibration curve. While there can be slight deviations in the energy scale between ER and NR signals if the electron-hole pair lifetime significantly exceeds the detector response speed, this factor is considered to be of second-order and was not considered in this work.

To achieve the best energy resolution using the current setup, we processed the pCVD high-resolution dataset with an optimum filter, using the averaged 59.5 keV γ events absorbed in the crystal as the template. The filtered signal had the maximum signal-to-noise ratio, which improved both the triggering threshold and the energy resolution.

To reduce the amount of noise-induced false trigger, we implemented a high-frequency rejection algorithm on the triggered waveform. Once the waveform was triggered with the optimum filter, we examined five sampling points in the flat-top region of the long trapezoid waveforms (10%, 30%, 50%, 80% and 90% points) and only accepted waveforms if all five points exceeds the threshold. In addition, if the mean time of the raw waveform appeared outside of the expected center of mass region of the waveform, we considered the waveform to be electronics noise and veto them. These high-frequency algorithms suppressed the false-trigger signals at the cost of reduced detection efficiency. The final energy was calculated after the correction for the temperature drifts and the pulse shape dependence of the energy estimator.

Figure 12 shows the fastness parameter $R_{\text{short/energy}}$ versus Energy scatter plot after correction. $R_{\text{short/energy}}$ was analogous to $R_{\text{short/long}}$ used previously, but used the optimal-filter derived amplitude in the determina-

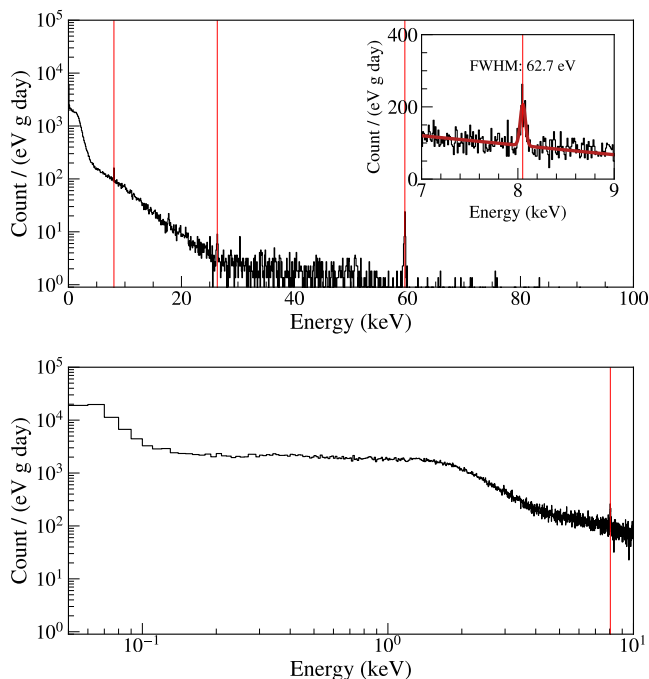


FIG. 13. Final energy spectra from crystal-hit events. (top) up to 100 keV. Red vertical lines indicate 8.05 keV, 26.34 keV and 59.54 keV photopeaks. The inset illustrates the 8.05 keV photopeak with a Gaussian fit. The FWHM at 8.05 keV is 62.7 eV (0.78%). (bottom) low-energy spectrum up to 10 keV in logarithmic x-axis.

tion of the ratio. To define the $\pm 5\sigma$ selection band for the crystal-hit events, the values of $R_{\text{short/energy}}$ at various energy slices were fit to Gaussian distributions using Random Sample Consensus (RANSAC) algorithm [64] to minimize distortions from other bodies. We examined the four most prominent x-ray peaks from ^{241}Am source at 17.8 keV, 26.34 keV and 59.54 keV, and the 8.05 keV copper fluorescence peak, and applied a quadratic calibration with zero constant to calibrate the spectrum.

Figure 13 shows the final energy spectra from the crystal hit events. We found the FWHM energy resolution at 8.05 keV to be 62.7 eV (0.78%). An increase in number of events below 150 eV was observed in the low-energy spectrum. To verify these are not noise-induced false-triggers, we averaged 200 waveforms at different energies and compare their shapes in Fig. 14. The comparison of the waveforms normalized by their energies clearly demonstrates that they do have the same rise-time, indicating they originate from the same heat-flow process. The undershoots prior to the low-energy waveforms indicates the presence of high-frequency noise. As the low-energy waveforms were comparable in amplitudes with the high-frequency noise, they could only surpass the trigger level if they were in-phase with the high-frequency noise. This phase selection was enhanced when averaging the waveforms and appeared as the undershoot just before the rising edge. This suggests that the trigger efficiency was

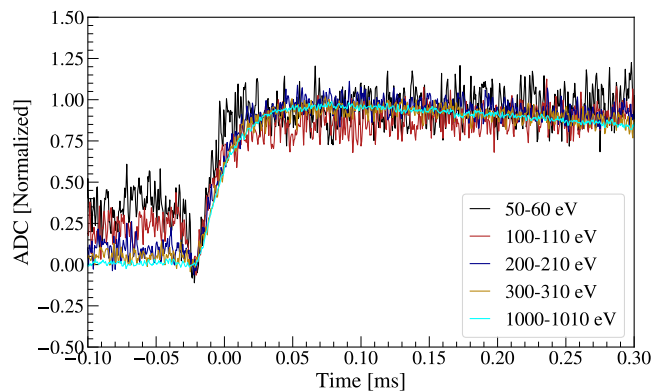


FIG. 14. Average waveforms at 5 different energies, normalized by their energies.

reduced due to the presence of the noise at low-energy region.

These results clearly demonstrate the existence of the increase in counts at low energy region below 100 eV, typically known to the community as the low-energy excess (LEE) [65]. This feature would become more prominent if the low detection efficiency at the low energy region is considered. If the detector is upgraded to the direct coupling design as explained above, the MMC-based detector will have enough bandwidth to both measure recoil with even lower energies and extract the thermal and athermal components of the events comprising the LEE. This will provide valuable information about the nature of the LEE, telling us whether the LEE is of thermal origin or non-thermal origin.

V. CONCLUSION

We conducted tests to assess high-quality lab-grown diamond crystals as particle absorbers for future dark matter searches using the MMC phonon sensors. We developed a novel method of characterizing the phonon evolution inside the target crystal by exploiting the high resolution and fast response of the MMC magnetic quantum sensors. The crystal fabricated via the polycrystalline chemical vapor deposition (pCVD) technique appeared to meet the stringent quality criteria for the DM search experiments. The phonon collection efficiency was found to be as high as $(99.8 \pm 2.3)\%$ in the best setup.

With the pCVD diamond sample, we achieved energy resolution of 61.9 eV at 8.05 keV. The energy resolution is expected to improve further using the advanced direct-contact MMC design that is currently under development. The analysis of the high-resolution dataset, however, also illustrated that some spectral features in the data are not yet fully understood. In particular, the origin of the band of events at $\tau_{\text{mean}} \approx 218 \mu\text{s}$ in the pCVD data (Fig. 6) is not yet known. Future measurements with the fast phonon sensors of MAGNETO-DM

with sub-microsecond response times may allow to investigate their origin.

With the energy threshold lower than 100 eV, we confirmed in our setup the existence of the low-energy excess reported from multiple low-temperature experiments. Future study with the diamond crystals and the MMC sensors will provide critical information and pin down the origin of the LEE.

VI. ACKNOWLEDGMENTS

This work was performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344. This work was supported by the Laboratory Directed Research and Development program of Lawrence Livermore National Laboratory (22-FS-011) and DOE Office of Science HEP Advanced Detector R&D program.

- ^a kim124@llnl.gov
- [1] D. Clowe, M. Bradač, A. H. Gonzalez, M. Markevitch, S. W. Randall, C. Jones, and D. Zaritsky, *The Astrophysical Journal* **648**, L109 (2006).
- [2] J. Liu, X. Chen, and X. Ji, *Nature Physics* **13**, 212 (2017).
- [3] T. M. Undagoitia and L. Rauch, *Journal of Physics G: Nuclear and Particle Physics* **43**, 013001 (2015).
- [4] K. Choi, K. Abe, Y. Haga, Y. Hayato, K. Iyogi, J. Kameda, Y. Kishimoto, M. Miura, S. Moriyama, M. Nakahata, *et al.* (Super-Kamiokande Collaboration), *Phys. Rev. Lett.* **114**, 141301 (2015).
- [5] R. Agnese, A. J. Anderson, T. Aramaki, M. Asai, W. Baker, D. Balakishiyeva, D. Barker, R. Basu Thakur, D. A. Bauer, J. Billard, *et al.* (SuperCDMS Collaboration), *Phys. Rev. Lett.* **116**, 071301 (2016).
- [6] E. Armengaud, Q. Arnaud, C. Augier, A. Benoît, L. Bergé, T. Bergmann, J. Billard, J. Blümer, T. De Boissière, G. Bres, *et al.*, *Journal of Cosmology and Astroparticle Physics* **2016**, 019 (2016).
- [7] Q. Arnaud, E. Armengaud, C. Augier, A. Benoît, L. Bergé, J. Billard, A. Broniatowski, P. Camus, A. Cazes, M. Chapellier, *et al.* (EDELWEISS Collaboration), *Phys. Rev. Lett.* **125**, 141301 (2020).
- [8] J. Conrad and O. Reimer, *Nature Physics* **13**, 224 (2017).
- [9] R. Abbasi, M. Ackermann, J. Adams, J. A. Aguilar, M. Ahlers, M. Ahrens, J. M. Alameddine, C. Alispach, A. A. Alves, N. M. Amin, *et al.* (IceCube Collaboration), *Phys. Rev. D* **105**, 062004 (2022).
- [10] Y. Meng, Z. Wang, Y. Tao, A. Abdukerim, Z. Bo, W. Chen, X. Chen, Y. Chen, C. Cheng, Y. Cheng, *et al.* (PandaX-4T Collaboration), *Phys. Rev. Lett.* **127**, 261802 (2021).
- [11] E. Aprile, K. Abe, F. Agostini, S. Ahmed Maouloud, L. Althueser, B. Andrieu, E. Angelino, J. R. Angevaere, V. C. Antochi, D. Antón Martín, *et al.* (XENON Collaboration), *Phys. Rev. Lett.* **129**, 161805 (2022).
- [12] M. Battaglieri, A. Belloni, A. Chou, P. Cushman, B. Echenard, R. Essig, J. Estrada, J. L. Feng, B. Flaugher, P. J. Fox, *et al.*, *arXiv preprint arXiv:1707.04591* (2017), [10.48550/arXiv.1707.04591](https://arxiv.org/abs/1707.04591).
- [13] A. Boveia, T. Y. Chen, C. Doglioni, A. Drlica-Wagner, S. Gori, W. H. Lippincott, M. E. Monzani, C. Prescott-Weinstein, B. Shakya, T. R. Slatyer, *et al.*, *arXiv preprint arXiv:2210.01770* (2022), [10.48550/arXiv.2210.01770](https://arxiv.org/abs/2210.01770).
- [14] P. D. Group *et al.*, *Progress of Theoretical and Experimental Physics* **2022** (2022).
- [15] R. Essig, J. Mardon, and T. Volansky, *Phys. Rev. D* **85**, 076007 (2012).
- [16] P. W. Graham, D. E. Kaplan, S. Rajendran, and M. T. Walters, *Physics of the Dark Universe* **1**, 32 (2012), next Decade in Dark Matter and Dark Energy.
- [17] R. Essig, M. Fernandez-Serra, J. Mardon, A. Soto, T. Volansky, and T.-T. Yu, *Journal of High Energy Physics* **2016**, 1 (2016).
- [18] M. Pospelov, A. Ritz, and M. Voloshin, *Phys. Rev. D* **78**, 115012 (2008).
- [19] M. Agostini, A. M. Bakalyarov, M. Balata, I. Barabanov, L. Baudis, C. Bauer, E. Bellotti, S. Belogurov, A. Bettini, L. Bezrukov, *et al.* (GERDA Collaboration), *Phys. Rev. Lett.* **125**, 011801 (2020).
- [20] I. J. Arnuist, F. T. Avignone, A. S. Barabash, C. J. Barton, K. H. Bhimani, E. Blalock, B. Bos, M. Busch, M. Buuck, T. S. Caldwell, *et al.* (Majorana Collaboration), *Phys. Rev. Lett.* **132**, 041001 (2024).
- [21] J. Vergados and H. Ejiri, *Physics Letters B* **606**, 313 (2005).
- [22] R. Bernabei, P. Belli, F. Montecchia, F. Nozzoli, F. Cappella, A. Incicchitti, D. Prospero, R. Cerulli, C. Dai, H. He, *et al.*, *International Journal of Modern Physics A* **22**, 3155 (2007).
- [23] M. Ibe, W. Nakano, Y. Shoji, and K. Suzuki, *Journal of High Energy Physics* **2018** (2018), [10.1007/JHEP03\(2018\)194](https://arxiv.org/abs/1807.09414).
- [24] R. Essig, J. Pradler, M. Sholapurkar, and T.-T. Yu, *Phys. Rev. Lett.* **124**, 021801 (2020).
- [25] J. Tiffenberg, M. Sofo-Haro, A. Drlica-Wagner, R. Essig, Y. Guardincerri, S. Holland, T. Volansky, and T.-T. Yu, *Phys. Rev. Lett.* **119**, 131802 (2017).
- [26] S. Fichet, *Phys. Rev. Lett.* **120**, 131801 (2018).
- [27] W. Guo and D. N. McKinsey, *Phys. Rev. D* **87**, 115001 (2013).
- [28] A. Caputo, A. Esposito, E. Geoffroy, A. D. Polosa, and S. Sun, *Physics Letters B* **802**, 135258 (2020).
- [29] H. J. Maris, G. M. Seidel, and D. Stein, *Phys. Rev. Lett.* **119**, 181303 (2017).
- [30] Y. Hochberg, Y. Kahn, M. Lisanti, C. G. Tully, and K. M. Zurek, *Physics Letters B* **772**, 239 (2017).
- [31] D. Kim, J.-C. Park, K. C. Fong, and G.-H. Lee, *arXiv preprint arXiv:2002.07821* (2020), [10.48550/arXiv.2002.07821](https://arxiv.org/abs/2002.07821).
- [32] Y. Hochberg, I. Charaev, S.-W. Nam, V. Verma, M. Colangelo, and K. K. Berggren, *Phys. Rev. Lett.* **123**, 151802 (2019).
- [33] F. W. Carter, S. A. Hertel, M. Rooks, P. McClintock, D. McKinsey, and D. Prober, *Journal of low temperature physics* **186**, 183 (2017).

- [34] R. Essig, J. Mardon, O. Slone, and T. Volansky, *Phys. Rev. D* **95**, 056011 (2017).
- [35] Y. Hochberg, Y. Zhao, and K. M. Zurek, *Phys. Rev. Lett.* **116**, 011301 (2016).
- [36] Y. Hochberg, Y. Kahn, M. Lisanti, K. M. Zurek, A. G. Grushin, R. Ilan, S. M. Griffin, Z.-F. Liu, S. F. Weber, and J. B. Neaton, *Phys. Rev. D* **97**, 015004 (2018).
- [37] Y. Hochberg, M. Pyle, Y. Zhao, and K. M. Zurek, *Journal of High Energy Physics* **2016**, 1 (2016).
- [38] N. Kurinsky, T. C. Yu, Y. Hochberg, and B. Cabrera, *Phys. Rev. D* **99**, 123005 (2019).
- [39] L. Canonica, A. Abdelhameed, P. Bauer, A. Bento, E. Bertoldo, N. Ferreiro Iachellini, D. Fuchs, D. Hauff, M. Mancuso, F. Petricca, *et al.*, *Journal of Low Temperature Physics* **199**, 606 (2020).
- [40] M. C. Marshall, M. J. Turner, M. J. H. Ku, D. F. Phillips, and R. L. Walsworth, *Quantum Science and Technology* **6**, 024011 (2021).
- [41] A. Abdelhameed, G. Angloher, A. Bento, E. Bertoldo, A. Bertolini, L. Canonica, N. F. Iachellini, D. Fuchs, A. Garai, D. Hauff, *et al.*, *The European Physical Journal C* **82**, 851 (2022).
- [42] S. Kempf, A. Fleischmann, L. Gastaldo, and C. Enss, *Journal of Low Temperature Physics* **193**, 365 (2018).
- [43] A. Fleischmann, C. Enss, and G. Seidel, “Metallic magnetic calorimeters,” in *Cryogenic Particle Detection*, edited by C. Enss (Springer Berlin Heidelberg, Berlin, Heidelberg, 2005) pp. 151–216.
- [44] S. T. P. Boyd, N. R. Hines, A. R. L. Kavner, and G.-B. Kim, *IEEE Transactions on Applied Superconductivity* **33**, 1 (2023).
- [45] G. B. Kim, J. H. Choi, H. S. Jo, C. S. Kang, H. L. Kim, I. Kim, S. R. Kim, Y. H. Kim, C. Lee, H. J. Lee, M. K. Lee, J. Li, S. Y. Oh, and J. H. So, *Astroparticle Physics* **91**, 105 (2017).
- [46] D. T. Stevenson and R. J. Keyes, *Journal of Applied Physics* **26**, 190 (1955), https://pubs.aip.org/aip/jap/article-pdf/26/2/190/7922020/190_1_online.pdf.
- [47] J. Isberg, J. Hammersberg, E. Johansson, T. Wikstrom, D. J. Twitchen, A. J. Whitehead, S. E. Coe, and G. A. Scarsbrook, *Science* **297**, 1670 (2002), <https://www.science.org/doi/pdf/10.1126/science.1074374>.
- [48] Y. Bi, E. M. Hutter, Y. Fang, Q. Dong, J. Huang, and T. J. Savenije, *The journal of physical chemistry letters* **7**, 923 (2016).
- [49] F. Zhang, B. Yang, X. Mao, R. Yang, L. Jiang, Y. Li, J. Xiong, Y. Yang, R. He, W. Deng, *et al.*, *ACS Applied Materials & Interfaces* **9**, 14827 (2017).
- [50] K.-P. Gradwohl, U. Juda, and R. Radhakrishnan Sumathi, *Journal of Crystal Growth* **573**, 126285 (2021).
- [51] G.-B. Kim, *Journal of Low Temperature Physics* **199**, 1004 (2020).
- [52] X. Zhang, J. Lin, V. B. Mikhailik, and H. Kraus, *Applied Physics Letters* **106**, 241904 (2015), https://pubs.aip.org/aip/apl/article-pdf/doi/10.1063/1.4922875/13280637/241904_1_online.pdf.
- [53] G.-B. Kim, (2023), 10.2172/1972903.
- [54] C.-K. Sun, F. Vallée, L. H. Acioli, E. P. Ippen, and J. G. Fujimoto, *Phys. Rev. B* **50**, 15337 (1994).
- [55] W. S. Fann, R. Storz, H. W. K. Tom, and J. Bokor, *Phys. Rev. B* **46**, 13592 (1992).
- [56] F. Pröbst, M. Frank, S. Cooper, P. Colling, D. Dummer, P. Ferger, G. Forster, A. Nucciotti, W. Seidel, and L. Stodolsky, *Journal of low temperature physics* **100**, 69 (1995).
- [57] II-VI Incorporated, <https://ii-vi.com/>.
- [58] Element Six, <https://www.e6.com/>.
- [59] National Instrument, <https://www.ni.com/>.
- [60] Stanford Research Systems, <https://www.thinksrs.com/>.
- [61] V. T. Jordanov, G. F. Knoll, A. C. Huber, and J. A. Pantazis, *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* **353**, 261 (1994).
- [62] L. Liu, X. Ouyang, J. Zhang, P. Jin, and C. Su, *Diamond and Related Materials* **73**, 248 (2017), 10th International Conference on New Diamond and Nano Carbons – NDNC 2016.
- [63] M. L. Gallin-Martel, Y. H. Kim, L. Abbassi, A. Bes, C. Boiano, S. Brambilla, J. Collot, G. Colombi, T. Crozes, S. Curtioni, *et al.*, *Frontiers in Physics* **9**, 732730 (2021).
- [64] M. A. Fischler and R. C. Bolles, *Commun. ACM* **24**, 381–395 (1981).
- [65] P. Adari, A. Aguilar-Arevalo, D. Amidei, G. Angloher, E. Armengaud, C. Augier, L. Balogh, S. Banik, D. Baxter, C. Beaufort, *et al.*, *SciPost Phys. Proc.*, 001 (2022).