

# Rapidly Rotating Wall-Mode Convection

Geoffrey M. Vasil<sup>1</sup>, Keaton J. Burns<sup>2,3</sup>, Daniel Lecoanet<sup>4,5</sup>, Jeffrey S. Oishi<sup>6</sup>, Benjamin P. Brown<sup>7</sup> & Keith Julien<sup>8</sup>

<sup>1</sup>School of Mathematics & the Maxwell Institute for Mathematical Sciences, University of Edinburgh, EH9 3FD, UK

<sup>2</sup>Department of Mathematics, Massachusetts Institute of Technology, Cambridge MA 02139, USA

<sup>3</sup>Center for Computational Astrophysics, Flatiron Institute, New York NY 10010, USA

<sup>4</sup>Department of Engineering Sciences and Applied Mathematics, Northwestern University, Evanston IL 60208, USA

<sup>5</sup>CIERA, Northwestern University, Evanston IL 60201, USA

<sup>6</sup>Department of Mechanical Engineering, University of New Hampshire, Durham NH 03824, USA

<sup>7</sup>Department of Astrophysical & Planetary Sciences, University of Colorado Boulder, Boulder CO 80309, USA

<sup>8</sup>Department of Applied Mathematics, University of Colorado Boulder, Boulder CO 80309, USA

(Received 1 November 2024)

In the rapidly rotating limit, we derive a balanced set of reduced equations governing the strongly nonlinear development of the convective wall-mode instability in the interior of a general container. The model illustrates that wall-mode convection is a multiscale phenomenon where the dynamics of the bulk interior diagnostically determine the small-scale dynamics within Stewartson boundary layers at the sidewalls. The sidewall boundary layers feedback on the interior via a nonlinear lateral heat-flux boundary condition, providing a closed system. Outside the asymptotically thin boundary layer, the convective modes connect to a dynamical interior that maintains scales set by the domain geometry. In many ways, the final system of equations resembles boundary-forced planetary geostrophic baroclinic dynamics coupled with barotropic quasi-geostrophic vorticity. The reduced system contains the results from previous linear instability theory but captured in an elementary fashion, providing a new avenue for investigating wall-mode convection in the strongly nonlinear regime. We also derive the dominant Ekman-flux correction to the onset Rayleigh number for large Taylor number,  $Ra \sim 31.8 Ta^{1/2} - 4.43 Ta^{5/12}$  for no-slip boundaries. However, we find that the linear onset in a finite cylinder differs noticeably compared to a Cartesian channel. We demonstrate some of the reduced model's nonlinear dynamics with numerical simulations in a cylindrical container.

## 1. Introduction

After more than a century of vigorous investigation, Rayleigh-Bénard convection remains a quintessential distilled model for convective instability, pattern formation, and turbulence in buoyancy-driven flows (Chassignet *et al.* 2012). Likewise, rotationally influenced Rayleigh-Bénard convection serves a similar classic role in modelling many natural environments such as oceanic, stellar, and planetary systems (Ecke & Shishkina 2023).

Four non-dimensional control parameters characterise Rayleigh-Bénard convection in a closed rotating vessel. Historically, the Rayleigh number, Taylor number, Prandtl number,

and aspect ratio provide the most common choice of dimensionless parameters,

$$Ra \equiv \frac{g\alpha \Delta T H^3}{\nu\kappa}, \quad Ta \equiv \frac{4\Omega^2 H^4}{\nu^2}, \quad \sigma \equiv \frac{\nu}{\kappa}, \quad \Gamma \equiv \frac{L}{H}. \quad (1.1)$$

These measure the strength of the characteristic buoyancy force, the strength of rotation, the fluid's dissipative properties, and the geometry. Here,  $g$  gives the gravitational acceleration,  $\alpha = -\rho^{-1}(\partial\rho/\partial T)|_{T_0, P_0}$  is the thermal expansion coefficient,  $\Delta T$  is the vertical temperature contrast,  $\nu$  represents the kinematic viscosity,  $\kappa$  represents the thermal diffusivity,  $\Omega$  gives the background rotation rate,  $H$  represents the container depth, and  $L$  gives a characteristic lateral extent (or diameter) of the container. The Ekman and convective Rossby numbers also provide useful equivalents to  $Ta$  and  $Ra$ . That is,

$$E \equiv Ta^{-1/2} = \frac{\nu}{2\Omega H^2}, \quad Ro \equiv \sqrt{\frac{Ra}{\sigma Ta}} = \frac{\sqrt{g\alpha\Delta T/H}}{2\Omega}, \quad (1.2)$$

where  $E$  measures the size of viscous boundary layers, and  $Ro$  measures the relative influence of buoyancy and rotation. In rapidly rotating systems, both  $E \ll 1$  and  $Ro \ll 1$ .

A significant partition in Rayleigh-Bénard convection modelling exists between *large-aspect-ratio* and *finite-aspect-ratio* systems. In large-aspect-ratio systems, sidewall boundaries play no significant role in the dynamics. Theoretical efforts in this area focus on linear stability analyses and numerical simulations with periodic boundary conditions, a useful simplification in many instances. Chandrasekhar (1953) first solved the linear stability theory for large-aspect-ratio rotating Rayleigh-Bénard convection; Chandrasekhar (1961) discusses the subject in thorough detail.

For moderate Prandtl number, Niiler & Bisshopp (1965) further clarified the influence of flow boundary conditions on the top and bottom plates in the rapidly rotating limit. For the present discussion, the most relevant result of these efforts is that in the rapidly rotating limit (large  $Ta$ ) with no-slip boundary conditions, the critical onset Rayleigh number scales as

$$Ra_{c,\text{bulk}} \approx 8.70 \times Ta^{2/3} - 9.63 \times Ta^{7/12} + \mathcal{O}(Ta^{1/2}) \quad \text{as } Ta \rightarrow \infty, \quad (1.3)$$

assuming  $\sigma = \mathcal{O}(1)$  (see Clune & Knobloch 1993; Dawes 2001). The  $\mathcal{O}(Ta^{7/12})$  term in (1.3) arises because of Ekman pumping effects correlating with leading-order convective modes (Zhang & Roberts 1998). Buell & Catton (1983) first addressed the sidewall issue theoretically with linear stability analysis but found only modest corrections to critical  $Ra$  values. However, their analysis focused on the finite-aspect-ratio corrections to the types of modes considered in Chandrasekhar (1953). The laboratory work of Nakagawa & Frenzen (1955) gave the first qualitative stability agreement and flow visualisation for rotating convection.

Pioneering experimental studies, with an approximately 2:1 aspect ratio, found interesting discrepancies from the large-aspect ratio theory (Rossby 1969). Without a means to visualise the interior flow, heat transport data was the primary quantitative outcome of these experiments. In discussing the convective onset in water, Rossby noted

*We find excellent agreement between theory and experiment for the critical Rayleigh number at all Taylor numbers less than  $5 \times 10^4$ ; beyond this the fluid becomes unstable at lower Rayleigh numbers. At a Taylor number =  $10^8$ , for example, the measured critical Rayleigh number is about one-third the expected value. We do not understand why this should be. It is quite reproducible; i.e., if one changes the depth of the fluid, the instability will occur at the same Rayleigh number for a given Taylor number.* (Rossby 1969, p. 322–323)

Motivated by the theory of Veronis (1968) for subcritical phenomena, Rossby con-

jectured at the possibility of finite-amplitude effects and speculated about the possible modes for the “subcritical” instability. In the early 1990s, several almost simultaneous efforts helped resolve Rossby’s paradox: We now understand that sidewalls lead to linear instability at lower Rayleigh numbers than in the large-aspect-ratio system.

Goldstein *et al.* (1993, 1994) conducted the first comprehensive linear stability analysis for a cylindrical vessel with a range of  $Ra$ ,  $Ta$ ,  $\sigma$ ,  $\Gamma$ . This work demonstrated that in a rapidly rotating finite-aspect ratio system, the onset of convection occurs via two distinct mode sets. The first type comprises non-propagating modes supported within the bulk and corresponds to the periodic modes in Chandrasekhar’s large-aspect-ratio analyses and Buell’s & Catton’s finite-domain modes. These solutions remain stationary in the rotating coordinate frame.

Goldstein *et al.* (1993) also found a second type of instability that proceeds via a set of faster precessing modes (retrograde with respect to system rotation). In contrast to the bulk dynamics, these waves exist in a thin boundary layer attached to the container’s sidewall. For large enough background rotation rates, the wall-localised modes emerge as the preferred pattern of instability in a regime subcritical to the bulk-mode instability. In the rapidly rotating limit,

$$Ra_{c,\text{wall}} \approx 31.8 \times Ta^{1/2} - 4.43 \times Ta^{5/12} + \mathcal{O}(Ta^{1/3}) \quad \text{as } Ta \rightarrow \infty. \quad (1.4)$$

Herrmann & Busse (1993) derived the leading-order term in this expression. Assuming stress-free top and bottom boundary conditions, Liao *et al.* (2006) computed an  $\mathcal{O}(Ta^{1/3})$  correction distinguishing between different sidewall velocity boundary conditions. The  $\mathcal{O}(Ta^{5/12})$  correction term also arises from no-slip top and bottom boundary conditions. As far as we know, this term is absent from the literature. In §5.2, we account for Ekman pumping (similar to Zhang & Roberts 1998) to calculate this term, along with the other associated corrections.

Along with the linear stability theory, the advent of practical optical shadowgraph techniques allowed much more detailed studies of the flow structures contained in experiments (Boubnov & Golitsyn 1986; Kuo & Cross 1993; Zhong *et al.* 1993). A large number of studies — for example, Rossby (1969); Boubnov & Golitsyn (1990); Julien *et al.* (1996); Sakai (1997); Hart *et al.* (2002); Ahlers *et al.* (2009); King *et al.* (2009); Kunnen *et al.* (2009); Niemela *et al.* (2010); Zhong & Ahlers (2010); Ning & Ecke (1993); Zhan *et al.* (2009); Weiss & Ahlers (2011); Liu & Ecke (2011); Stevens *et al.* (2011) — examine the heat-transport and flow properties in rotating Rayleigh-Bénard systems significantly above the onset of bulk convection (see fig. 1 for a sample of experiment parameter ranges). Alternatively, we focus on the parameter range below onset for bulk convection, where wall-mode convection exists in isolation. Fewer experimental results exist in this regime (e.g. Liu & Ecke 2011; Aurnou *et al.* 2018). We point out that in the limit  $Ta \rightarrow \infty$  wall-mode convection can reach values of  $Ra/Ra_{c,\text{wall}} = \mathcal{O}(Ta^{1/6})$  before exciting the bulk mode. This indicates the potential development of strongly nonlinear dynamics in the cross-hatched region of fig. 1.

More recently, several studies have examined the cross-hatched region and its vicinity with direct numerical simulations (Kunnen *et al.* 2011; Horn & Schmid 2017; Favier & Knobloch 2020; Ecke *et al.* 2022; de Wit *et al.* 2023; Ravichandran & Wettlaufer 2023; Zhang *et al.* 2024). One significant result from these efforts is that wall mode dynamics can undergo various degrees of wall separation and even generate interior turbulence below the threshold for bulk convection onset (Albaiz & Hart 1990; Zhong *et al.* 1991; Marques & Lopez 2008; Li *et al.* 2008; Rubio *et al.* 2009; Favier & Knobloch 2020; Zhang *et al.* 2024). The generation of boundary zonal flows has also been an area of

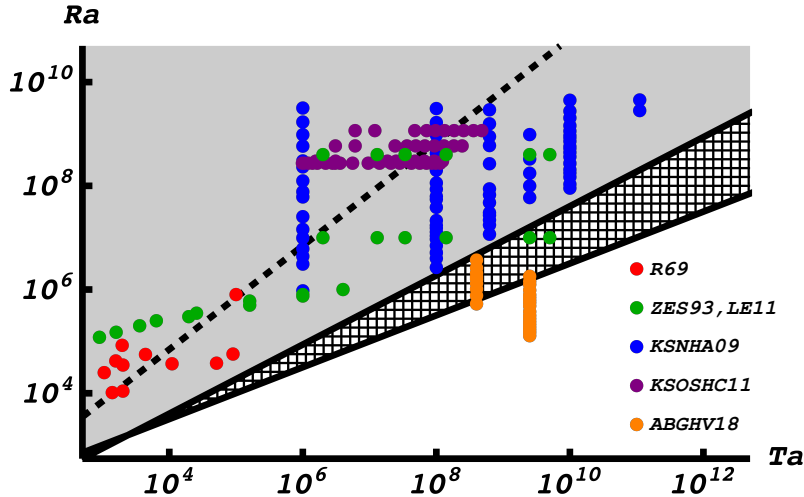


FIGURE 1. Approximate stability regions and experimental parameters. The respective sources are all laboratory experiments: *R69*: (Rossby 1969); *ZES93*: (Zhong *et al.* 1993); *LE11*: (Liu & Ecke 2011); *KSNHA09*: (King *et al.* 2009); *KSOCHC11*: (Kunnen *et al.* 2011); *ABGHV18*: (Aurnou *et al.* 2018). In each case, the current author gathered the information from the respective sources by hand. All values are approximate and intended to get an idea of the relative ranges of data. The cross-hatched region shows the wall-mode regime between the asymptotic stability scalings  $Ra_{\text{bulk}} \sim 8.7 Ta^{2/3}$  and  $Ra_{\text{wall}} \sim 31.8 Ta^{1/2}$ . The 31.8 coefficient is roughly an upper bound; the actual value somewhat lower in a finite-aspect-ratio cylinder (see fig. 5). Except for *ABGHV18*, all experiments use moderate Prandtl numbers, approximately between 4-7. The steep dashed line shows the convective Rossby number threshold  $Ro \approx 1$  for Prandtl  $\approx 7$ . The *ABGHV18* experiment used gallium with Prandtl  $\approx 0.025$  with markedly different onset behaviour, but still well below  $Ro = 1$ .

interest (de Wit *et al.* 2020; Zhang *et al.* 2021; Wedi *et al.* 2022; Ecke *et al.* 2022). With the rich interplay of wall-localised and interior dynamics, many questions remain. What is genuinely wall-generated behaviour versus what is wall-catalysed bulk dynamics? Without getting into a regime of  $Ta$  far exceeding current simulations and experiments, there is not enough dynamic range to disentangle various phenomena.

Within the wall-dominated cross-hatch region, the convective Rossby number satisfies  $Ro = \mathcal{O}(E^{1/2})$  indicating strong rotational influence. Sprague *et al.* (2006); Julien & Knobloch (2007) show that regimes of low  $E$ ,  $Ro$  exhibit balanced dynamics for bulk convection and are prime candidates for dynamical reductions capturing nonlinear evolution through the application of multiple-scale perturbation theory. In this paper, we derive a systematic dynamical reduction for wall-mode convection.

### 1.1. Outline

We organise the paper as follows:

- §2 outlines the parameter choices and model equation setup.
- §3 derives the fundamental equations, including
  - §3.1 interior balances,
  - §3.2 sidewall Stewartson layers,
  - §3.3 Ekman layer effects.
- §4 gives a concise summary of all derived results in (4.5)–(4.10).
- §5 describes linear theory, including

- §5.1 for Cartesian coordinates near a semi-infinite domain,
- §5.2 the leading-order correction to the critical Rayleigh number,
- §5.3 direct-numerical validation of critical parameters,
- §5.4 within a closed finite cylinder,
- §5.5 a local baroclinic instability.
- §6 reports the results of numerical simulations in cylindrical geometry.
- §7 gives conclusions and discusses generalisations, including
  - §7.1 double diffusion,
  - §7.2 magnetism.

## 2. Model Setup

We start our multiscale asymptotic analysis from the Boussinesq equations (Spiegel & Veronis 1960). We pose and analyse the system in a local Cartesian coordinate system  $(x, y, z)$  along a flat vertical wall, with  $x$  increasing into the wall at  $x = \Gamma$ , the coordinate  $y$  tangential along the wall, and  $z$  vertical. We choose this coordinate system to easily translate to more general situations, e.g. an upright cylinder,  $(x, y, z) \rightarrow (r, \theta, z)$ .

We pick our non-dimensionalisation to agree mostly with the standard thermal diffusion scaling. For box depth,  $H$ , and thermal diffusivity,  $\kappa$ , we scale length  $\sim H$ , velocity  $\sim \kappa/H$ , and time  $\sim H^2/\kappa$ .

For the temperature and pressure, the known properties of wall-mode dynamical balances (Herrmann & Busse 1993) imply a slightly non-standard normalisation. We define a linear reference temperature profile,

$$T_{\text{ref}}(z) = T_{\text{top}} + \Delta T (1 - z/H), \quad (2.1)$$

where the domain comprises  $0 \leq z/H \leq 1$  and  $T_{\text{top}}$  and  $T_{\text{bot}} = T_{\text{top}} + \Delta T$  are the fixed temperatures at the top and bottom boundary. We use the temperature perturbation,  $\Theta = T - T_{\text{ref}}(z)$  as a dynamical variable. Similarly, we evolve the pressure perturbation  $p$  relative to a reference hydrostatic profile balancing  $T_{\text{ref}}(z)$ .

It is common to scale pressure  $\sim \nu\kappa/H^2$  and temperature  $\sim \Delta T$ . However, we pick

$$p \sim 2\Omega \kappa, \quad \Theta \sim \frac{2\Omega \kappa}{g \alpha H}. \quad (2.2)$$

These scalings allow the pressure to balance buoyancy and rotation; the temperature maintains thermal wind balance.

These scalings naturally introduce a “reduced” Rayleigh number as the buoyancy control parameter,

$$R \equiv Ra E = \sigma \frac{Ro^2}{E} = \frac{g\alpha\Delta TH}{2\Omega\kappa} = \mathcal{O}(1) \quad \text{as } E \rightarrow 0. \quad (2.3)$$

Our non-dimensional system takes the form,

$$\frac{1}{\sigma} \frac{Du}{Dt} + \frac{\partial_x p - v}{E} = \nabla^2 u, \quad (2.4)$$

$$\frac{1}{\sigma} \frac{Dv}{Dt} + \frac{\partial_y p + u}{E} = \nabla^2 v, \quad (2.5)$$

$$\frac{1}{\sigma} \frac{Dw}{Dt} + \frac{\partial_z p - \Theta}{E} = \nabla^2 w, \quad (2.6)$$

$$\partial_x u + \partial_y v + \partial_z w = 0, \quad (2.7)$$

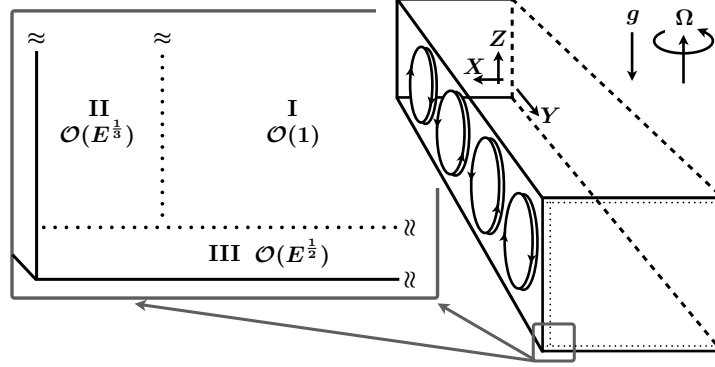


FIGURE 2. Schematic diagram of the basic domain. Each region, I–III, comprises different length, time, and amplitude scalings in terms of powers of  $\varepsilon = E^{1/3}$ . The asymptotic analysis considers each region separately and connects each through a series of matching conditions, eventually being left entirely with  $\mathcal{O}(1)$  dynamics in the bulk (Region I). We refer to Region II as the Stewartson sidewall layer and Region III as the Ekman layer (at both the top and bottom of the domain). We conduct the asymptotic analysis in Cartesian coordinates  $(x, y, z)$  without loss of generality. After obtaining the final results, it is straightforward to use general coordinates and re-pose the system in cylindrical polar coordinates with  $x \rightarrow r$ ,  $y \rightarrow \phi$  and  $z \rightarrow z$ .

$$\frac{D\Theta}{Dt} - R w = \nabla^2 \Theta, \quad (2.8)$$

where

$$\frac{D}{Dt} = \partial_t + u \partial_x + v \partial_y + w \partial_z, \quad \nabla^2 = \partial_x^2 + \partial_y^2 + \partial_z^2. \quad (2.9)$$

The system models the dynamics of a weakly compressible fluid in an upright container with uniform height  $0 \leq z \leq 1$  and arbitrary horizontal geometry. The system rotates at a fixed rate about an axis anti-aligned with gravity; see, e.g., fig. 2. The triplet  $(u, v, w)$  represents the fluid velocities in the  $(x, y, z)$  directions respectively. The quantity  $\Theta$  represents the temperature departure from a constant reference value, and  $p$  gives the dynamic pressure.

In this simplified geometry, we address both no-slip (*NS*) and stress-free (*SF*) boundary conditions on all walls:

$$(z\text{-}NS): u = v = w = 0, \text{ at } z = 0, 1 \quad (2.10)$$

$$(z\text{-}SF): \partial_z u = \partial_z v = w = 0, \text{ at } z = 0, 1 \quad (2.11)$$

$$(x\text{-}NS): u = v = w = 0, \text{ at } x = \Gamma \quad (2.12)$$

$$(x\text{-}SF): u = \partial_x v = \partial_x w = 0, \text{ at } x = \Gamma \quad (2.13)$$

Differences between no-slip and stress-free conditions on the sidewalls produce no leading-order effect on the final result, while the top/bottom boundaries show important differences.

Given that  $\Theta$  is the perturbation from the reference profile,  $T_{\text{ref}}(z)$ , the thermal boundary conditions on both plates are

$$\Theta|_{z=0} = \Theta|_{z=1} = 0. \quad (2.14)$$

The thermal sidewall condition influences the dynamics more than any other. We use perfectly insulating sidewalls,

$$\partial_x \Theta|_{x=\Gamma} = 0. \quad (2.15)$$

Relaxing the insulating condition to include finite conduction stabilises the wall mode because of heat losses. In the infinite conductivity limit, the container walls short-circuit the instability entirely.

### 3. Multiscale Asymptotic Analysis

We aim to find reduced equations capturing the leading-order nonlinear behaviour of the wall-mode instability in the limit of an infinitesimal Ekman number,  $E \ll 1$ . We have already discussed the relevant pressure amplitude and Rayleigh number scaling. We now describe the *a priori* known properties of the boundary layer thicknesses and flow amplitudes.

(i): A thermally forced side-wall Stewartson boundary layer (Stewartson 1957; Barcion & Pedlosky 1967*a,b*; Hashimoto 1976; Fein 1978; Albaiz & Hart 1990; Pedlosky 2009; Kunnen *et al.* 2013) drives the dynamics from within a characteristic layer thickness

$$dx \sim E^{1/3} \quad (3.1)$$

(ii) For no-slip boundary conditions, top and bottom Ekman layers (Greenspan 1969; Pedlosky 1987) influence the dynamics from within a characteristic layer thickness

$$dz \sim E^{1/2} \quad (3.2)$$

(iii) Relative to the thermal diffusion velocity normalisation  $\kappa/H$ , the fluid velocities near the wall carry a large amplitude

$$(u, v, w) \sim E^{-1/3}, \quad (3.3)$$

while the interior velocities remain  $\mathcal{O}(1)$  in these units.

Throughout this paper, the Prandtl number remains a fixed order-unity number and does not scale with  $E$  in any way. Allowing  $\sigma$  to scale with  $E$  can lead to several interesting possibilities (Dawes 2001; Zhang *et al.* 2007; Zhang & Liao 2009), but this remains beyond our current scope.

Assumptions (i) & (ii) introduce multiple scales, where all variables depend on both small and large length scales. For example, with the pressure

$$p = p\left(\frac{x}{E^{1/3}}, x, y, \frac{z}{E^{1/2}}, z, t\right). \quad (3.4)$$

Multiple-scale theory dictates (Kevorkian & Cole 1981) that each argument varies independently of the others. This assumption allows redefining the derivative operators

$$\partial_x \rightarrow \frac{1}{E^{1/3}} \partial_x + \partial_X, \quad \partial_y \rightarrow \partial_Y, \quad \partial_z \rightarrow \frac{1}{E^{1/2}} \partial_z + \partial_Z. \quad (3.5)$$

The capital-letter coordinates  $(X, Y, Z)$  now label position within the “large-scale” interior (outside boundary layers). The small-letter coordinates  $(x, z)$  label position within the Stewartson and Ekman boundary layers, respectively. We exclude asymptotically small-scale dynamics in the  $Y$ -direction along the sidewall. In the bulk-convection regime (*i.e.*,  $R \sim E^{-1/3}$ ) both horizontal directions adopt  $\mathcal{O}(E^{1/3})$  length scales (Julien & Knobloch 2007).

The  $\mathcal{O}(E^{1/3})$  length scale controls the overall system, suggesting the expansion parameter,

$$\varepsilon \equiv E^{1/3}. \quad (3.6)$$

The Ekman layers on the top and bottom thus require half-integer powers  $E^{1/2} = \varepsilon^{3/2}$ .

Eq. (3.6) and the above scalings of pressure and velocity with  $E$  imply the following asymptotic series for the dynamical variables

$$u = \frac{u_{-1}}{\varepsilon} + \frac{u_{-1/2}}{\varepsilon^{1/2}} + u_0 + \mathcal{O}(\varepsilon^{1/2}) \quad (3.7)$$

$$v = \frac{v_{-1}}{\varepsilon} + \frac{v_{-1/2}}{\varepsilon^{1/2}} + v_0 + \mathcal{O}(\varepsilon^{1/2}) \quad (3.8)$$

$$w = \frac{w_{-1}}{\varepsilon} + \frac{w_{-1/2}}{\varepsilon^{1/2}} + w_0 + \mathcal{O}(\varepsilon^{1/2}) \quad (3.9)$$

$$p = p_0 + \varepsilon^{1/2} p_{1/2} + \varepsilon p_1 + \mathcal{O}(\varepsilon^{3/2}) \quad (3.10)$$

$$\Theta = \Theta_0 + \varepsilon^{1/2} \Theta_{1/2} + \varepsilon \Theta_1 + \mathcal{O}(\varepsilon^{3/2}). \quad (3.11)$$

Defining pure interior variables aids in the following analysis. Capital-letter variables (e.g.,  $U, V, W, P$ ) denote quantities depending only on large-scale interior coordinates  $(X, Y, Z)$ . These connect to the boundary layer variables via a matching principle. For example, with the leading-order pressure,

$$P_0(X, Y, Z) \equiv \lim_{|x|, |z| \rightarrow \infty} p_0(x, X, Y, z, Z), \quad (3.12)$$

and so on. The analysis in §3.1–3.3 shows that the temperature is an interior variable, removing the need to start with a lowercase variable.

The three following subsections determine the leading-order dynamics. We examine each region shown in fig. 2 and connect each through appropriate matching conditions.

### 3.1. Region-I (Interior)

Given the scaling of (2.4)–(2.7), we can read off the leading-order interior dynamical equations by inspection. The bulk dynamics only contains  $\mathcal{O}(\varepsilon^0)$  amplitudes. It is possible to derive this explicitly by considering the leading-order balances of the full asymptotic expansion. From the momentum equations and continuity,

$$U_0 = -\partial_Y P_0, \quad V_0 = \partial_X P_0, \quad W_0 = 0, \quad \Theta_0 = \partial_Z P_0. \quad (3.13)$$

The pressure gives the horizontal velocities and temperature in a *thermal-wind* balance (*i.e.*, a joint hydrostatic and geostrophic balance).

The temperature equation retains its original nonlinear form (except for vertical advection),

$$(\partial_t + U_0 \partial_X + V_0 \partial_Y) \Theta_0 = (\partial_X^2 + \partial_Y^2 + \partial_Z^2) \Theta_0. \quad (3.14)$$

The combined equations (3.13) & (3.14) almost form a closed system, with two important caveats.

The first major caveat is that the temperature evolution equation contains no obvious sources. Defining the horizontal velocity vector,  $U_\perp = (U_0, V_0)$ , the available thermal energy evolution,

$$\begin{aligned} \frac{d}{dt} \int_0^1 \int_{\mathcal{A}} \frac{\Theta_0^2}{2} dX dY dZ + \int_0^1 \int_{\partial \mathcal{A}} \left[ \frac{\Theta_0^2}{2} U_\perp - \Theta_0 \nabla_\perp \Theta_0 \right] \cdot \hat{n} d\ell dZ = \\ - \int_0^1 \int_{\mathcal{A}} [|\nabla_\perp \Theta_0|^2 + |\partial_Z \Theta_0|^2] dX dY dZ \leq 0, \end{aligned} \quad (3.15)$$



where  $d\ell$  is the integration measure along the boundary,  $\partial\mathcal{A}$  and  $\hat{n}$  is the outward unit normal vector. Eq. (3.15) shows that the boundary terms must force the system strongly enough to overcome persistent dissipation. Without the boundary terms (like in conventional bulk convection), the available thermal energy would monotonically decrease. Driving (3.14) requires forcing from the sidewall boundary layers, which we explain in §3.2.

The second caveat is that (3.14) determines the evolution only for the temperature. Obtaining the velocities requires the pressure, and obtaining the pressure requires solving hydrostatic balance (3.13). The difficulty comes from not knowing the depth-independent, or *barotropic*, component of the pressure,

$$\langle P_0 \rangle \equiv \int_0^1 P_0 dZ. \quad (3.16)$$

We derive an equation for  $\langle P_0 \rangle$  by considering the top and bottom boundaries together with their velocity boundary conditions in §3.3.

### 3.2. Region-II (Stewartson Layer)

In the Stewartson sidewall layers, focusing on  $X = \Gamma$  and  $-\infty < x \leq 0$ , the physical container boundary corresponds to  $x = 0$  and  $X = \Gamma$ , while the boundary of the interior corresponds to  $X = \Gamma$  and  $x \rightarrow -\infty$ . The leading-order momentum equation (2.4) in the  $X$ -direction gives

$$u_{-1} = u_{-1/2} = 0. \quad (3.17)$$

The leading-order diffusion of temperature from (2.8) gives

$$\partial_x^2 \Theta_0 = 0, \quad (3.18)$$

which implies a constant leading-order temperature across the boundary layer. Strictly speaking, (3.18) contains a linearly growing solution in  $x$ . The possibility of unbounded amplitudes as  $|x| \rightarrow \infty$  preclude this solution. Therefore, the leading-order temperature exists as a pure interior dynamical variable,

$$\Theta_0 = \Theta_0(X, Y, Z). \quad (3.19)$$

While (3.19) implies that  $\Theta_0$  does not vary across the boundary layer, there exist temperature fluctuations in the directions along the wall both in  $Y$  and  $Z$ . The interior thermally forces the boundary layer via tangential gradients.

Given a temperature field in the interior, the leading-order momentum and continuity equations follow

$$\partial_x p_0 - v_{-1} = 0 \quad (3.20)$$

$$\partial_Y p_0 + u_0 - \partial_x^2 v_{-1} = 0 \quad (3.21)$$

$$\partial_Z p_0 - \partial_x^2 w_{-1} = \Theta_0 \quad (3.22)$$

$$\partial_x u_0 + \partial_Y v_{-1} + \partial_Z w_{-1} = 0. \quad (3.23)$$

The system is similar to the Stewartson layer balances derived in other work (Stewartson 1957; van Heijst 1983; Kunnen *et al.* 2013). The main difference is that (3.20)–(3.23) have enough derivatives to satisfy all velocity boundary conditions at the physical wall, and thermal anomalies force the whole boundary layer from the interior. There is no need for the classical  $E^{1/4}$  exterior layer needed typically needed to satisfy all velocity boundary conditions.

The interior forces the vertical velocity via eq. (3.22). Leading-order balances also imply

$\partial_x^2 \Theta_{1/2} = 0$ . To see how the boundary layer feeds back to the interior, the next-order temperature equation for  $\Theta_1$ ,

$$v_{-1} \partial_Y \Theta_0 + w_{-1} (\partial_Z \Theta_0 - R) = \partial_x^2 \Theta_1. \quad (3.24)$$

The crucial connection between the interior and boundary layer comes from the full form of the insulating thermal boundary condition at the physical sidewall,

$$\partial_X \Theta_0 + \partial_x \Theta_1 = 0 \quad \text{at} \quad x = 0, \quad X = \Gamma. \quad (3.25)$$

This couples  $\Theta_0$ , from the interior, with  $\Theta_1$ , from (3.24). Integrating (3.24) over boundary layer coordinate,

$$x \in (-\infty, 0] = \mathbb{R}^-, \quad (3.26)$$

gives

$$q_Y \partial_Y \Theta_0 + q_Z (\partial_Z \Theta_0 - R) = \partial_x \Theta_1 \Big|_{x=0} = -\partial_X \Theta_0 \Big|_{X=\Gamma} \quad (3.27)$$

where the  $\partial_x \Theta_1 \Big|_{x \rightarrow -\infty}$  term vanishes because  $v_{-1}$  and  $w_{-1}$  decay exponentially away from  $x = 0$  (see below), and there is no linearly growing homogeneous solution in  $x$  with bounded amplitude as  $x \rightarrow -\infty$ . Eq (3.27) expresses energy conservation between the boundary layer and the interior.

The total momentum fluxes within the sidewall layers are

$$q_Y = \int_{\mathbb{R}^-} v_{-1} dx, \quad q_Z = \int_{\mathbb{R}^-} w_{-1} dx. \quad (3.28)$$

These purely surface quantities depend on the tangent directions,  $(Y, Z)$ . They couple to the  $\mathcal{O}(\varepsilon^0)$  dynamics because while  $v_{-1}, w_{-1} \sim \mathcal{O}(\varepsilon^{-1})$ , the boundary layer width,  $dx \sim \mathcal{O}(\varepsilon)$ . The tangential velocities act exactly like Dirac- $\delta$  distributions at the boundary of the bulk,  $X = \Gamma$ .

To further constrain  $q_Y$  and  $q_Z$ , we integrate the continuity equation

$$\partial_Y q_Y + \partial_Z q_Z = u_0 \Big|_{x=-\infty} = U_0 \Big|_{X=\Gamma}. \quad (3.29)$$

The integration limit  $u_0 \Big|_{x=0} = 0$  because of impenetrability at the physical container wall. Eq (3.29) expresses mass conservation between the boundary layer and the interior.

To close the system, we need another relation between  $q_Y$  and  $q_Z$ , which comes from directly solving (3.20)–(3.23). We represent the horizontal velocities strictly in terms of the pressure

$$u_0 = -\partial_Y p_0 + \partial_x^3 p_0 \quad (3.30)$$

$$v_{-1} = \partial_x p_0 \quad (3.31)$$

The following coupled system relates the pressure and vertical velocity:

$$\partial_Z w_{-1} + \partial_x^4 p_0 = 0 \quad (3.32)$$

$$-\partial_x^2 w_{-1} + \partial_Z p_0 = \Theta_0, \quad (3.33)$$

which collapses into a single system for the vertical velocity,

$$(\partial_Z^2 + \partial_x^6) w_{-1} = 0. \quad (3.34)$$

### 3.2.1. Bulk onset comparison

Eq. (3.34) should look familiar; it is half of the traditional asymptotic stability condition in the rapidly rotating regime when  $Ra \sim E^{4/3}$ . In terms of the  $R$  and  $\varepsilon$  parameters,

the full bulk leading-order balance,

$$(\partial_Z^2 + \partial_x^6) w_{-1} = \varepsilon R \partial_x^2 w_{-1}. \quad (3.35)$$

If  $\varepsilon R \sim \mathcal{O}(1)$ , the left-hand side balances with  $\partial_x^2 \rightarrow -k^2$ ,  $\partial_Z^2 \rightarrow -\pi^2$  and we have the traditional stability condition (Chandrasekhar 1961),

$$\text{Bulk onset: } \varepsilon R \sim \frac{\pi^2 + k^6}{k^2} \geq \frac{3\pi^{4/3}}{2^{2/3}} \quad \text{for} \quad k = \frac{\pi^{1/3}}{2^{1/6}}. \quad (3.36)$$

The equation represents a triple balance between vortex stretching (*i.e.*,  $\partial_Z^2$ ) and diffusion (*i.e.*,  $\partial_x^6$ ) on the left, with buoyancy on the right. However, if  $R \sim \mathcal{O}(1)$ , the right-hand side of (3.35) drops out, and the bulk no longer supports harmonic  $x$  dependence. In that case, the only possible solutions happen with exponential  $x$  dependence, which can only remain bounded near a wall.

### 3.2.2. Boundary layer solutions

We solve the system for no-slip physical sidewall boundary conditions,

$$u_0 = v_{-1} = w_{-1} = 0 \quad \text{at} \quad x = 0. \quad (3.37)$$

We could alternatively use stress-free conditions; however, doing so gives exactly the same final relationship between  $q_Y$  and  $q_Z$ . We also impose  $w_{-1} = 0$  at  $Z = 0, 1$ .

Solving (3.32) & (3.33) requires Fourier decomposing the velocities, pressure, and temperature in the  $Z$  direction.

$$\Theta_0 = \sum_{n \geq 1} \hat{\Theta}_n(X, Y) \sin(n\pi Z), \quad (3.38)$$

$$p_0 = \sum_{n \geq 0} \hat{p}_n(x, X, Y) \cos(n\pi Z), \quad (3.39)$$

$$u_0 = \sum_{n \geq 0} \hat{u}_n(x, X, Y) \cos(n\pi Z), \quad (3.40)$$

$$v_{-1} = \sum_{n \geq 0} \hat{v}_n(x, X, Y) \cos(n\pi Z), \quad (3.41)$$

$$w_{-1} = \sum_{n \geq 1} \hat{w}_n(x, X, Y) \sin(n\pi Z). \quad (3.42)$$

Solving for the Fourier coefficients, which decay as  $x \rightarrow -\infty$  and satisfy either no-slip or stress-free boundary conditions at  $x = 0$ , gives

$$\hat{p}_n = \hat{P}_n + \hat{Q}_n \mathcal{X}(\alpha_n x), \quad (3.43)$$

$$\hat{u}_n = \hat{U}_n (1 - \mathcal{X}(\alpha_n x)), \quad (3.44)$$

$$\hat{v}_n = \alpha_n \hat{Q}_n \mathcal{X}'(\alpha_n x), \quad (3.45)$$

$$\hat{w}_n = \alpha_n \hat{Q}_n \mathcal{X}'(\alpha_n x), \quad (3.46)$$

where  $\alpha_n = (n\pi)^{1/3}$ . The boundary layer profile function,

$$\mathcal{X}(x) = \frac{e^{\frac{x}{2}} \cos(\frac{\sqrt{3}x}{2} + \delta)}{\cos(\delta)}, \quad (3.47)$$

where the phase  $\delta = \pm\pi/6$  depends on the tangential boundary conditions. In both cases,

$$\mathcal{X}''(x) - \mathcal{X}'(x) + \mathcal{X}(x) = 0, \quad \mathcal{X}(0) = 1, \quad (3.48)$$

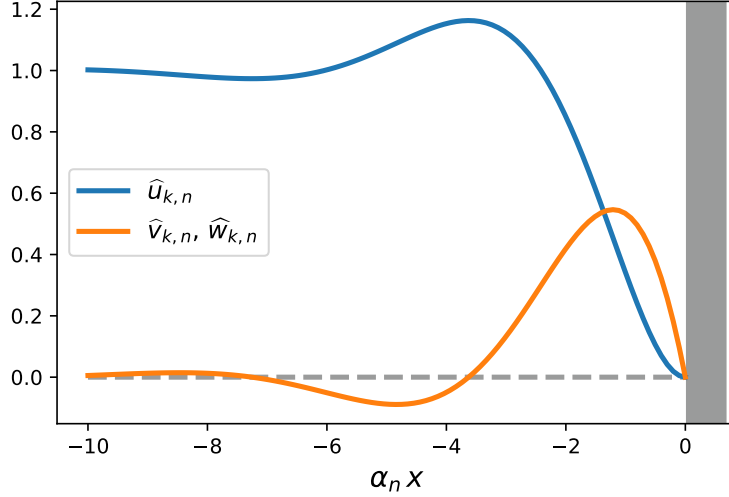


FIGURE 3. Thermal Stewartson boundary layer solutions for no-slip tangential velocities: The blue line shows  $1 - \mathcal{X}(x)$ . The orange line shows  $\mathcal{X}'(x)$ .

which satisfies the normal velocity,  $\hat{u}_n = 0$  at  $x = 0$ . For the tangential velocities,

$$\text{No-slip:} \quad \hat{v}_n = \hat{w}_n = 0 \quad \iff \quad \delta = +\frac{\pi}{6}, \quad \mathcal{X}'(0) = 0, \quad (3.49)$$

$$\text{Stress-free:} \quad \partial_x \hat{v}_n = \partial_x \hat{w}_n = 0 \quad \iff \quad \delta = -\frac{\pi}{6}, \quad \mathcal{X}''(0) = 0. \quad (3.50)$$

Fig. 3 shows the velocity amplitudes for the no-slip case.

The capitol-letter variables,  $\hat{U}_n$ ,  $\hat{P}_n$  and  $\hat{\Theta}_n$  are the Fourier transforms of the interior bulk quantities that satisfy thermal wind balance at  $X = \Gamma$ ,

$$\hat{U}_n = -\partial_Y \hat{P}_n, \quad -n\pi \hat{P}_n = \hat{\Theta}_n. \quad (3.51)$$

The overall amplitude satisfies,

$$(\partial_Y + n\pi) \hat{Q}_n = \hat{U}_n, \quad (3.52)$$

which is the Fourier-space version of mass conservation at the bulk boundary (3.29).

There are a couple of notable comments regarding (3.43)–(3.46). The first is that both  $\hat{v}_n$  and  $\hat{w}_n$  exist strictly within the boundary layer and do not continue into the bulk interior. The second comment is that  $\hat{p}_n$  and  $\hat{u}_n$  both contain components that are independent of  $x$ . These terms take precisely the same form as the interior geostrophic and hydrostatic balance found in §3.1.

The most important comment regarding (3.45) & (3.46) is that the coefficients of  $\hat{v}_{k,n}$  and  $\hat{w}_{k,n}$  take identical forms.

$$\hat{v}_n = \hat{w}_n \quad (3.53)$$

and

$$\hat{Q}_n = \int_{\mathbb{R}^-} \hat{v}_n dx = \int_{\mathbb{R}^-} \hat{w}_n dx. \quad (3.54)$$

That is, the  $\hat{Q}_n$  amplitude gives the Fourier coefficients for *both*  $q_Y$  and  $q_Z$ , closing the system of equations. However, we still need to collect all the relevant information and pose the system in a local abstract form, not in Fourier space.

Finally, regarding the bulk, all relevant quantities do not depend on the value of  $\delta = \pm\pi/6$ . This observation accords with the findings from Liao *et al.* (2006) that the leading-order stability is independent of the sidewall velocity boundary conditions.

### 3.2.3. Hilbert transform

While the Fourier amplitudes of  $v_{-1}$ ,  $q_Y$ ,  $w_{-1}$  and  $q_Z$  are all identical, the local functions are not equal because  $v_{-1}$  and  $q_Y$  are Fourier cosine series in  $Z$ , but  $w_{-1}$  and  $q_Z$  are Fourier sine series. We need an operator to transform between the different parities, which naturally leads to the Hilbert transform,  $\mathcal{H}$ , in the  $Z$  direction. For the present analysis, the utility of the Hilbert transform lies in its action on a Fourier sine and cosine basis. For  $n \neq 0$ ,

$$\mathcal{H}[\sin(n\pi Z)] = -\cos(n\pi Z), \quad \mathcal{H}[\cos(n\pi Z)] = +\sin(n\pi Z), \quad (3.55)$$

which alters the parity of the basis elements in the same manner as a derivative but without the multiplication by the wavenumber,  $n\pi$ . Additionally, the Hilbert transform possesses the following useful properties

$$\mathcal{H}^2[f] = -f + \langle f \rangle, \quad \partial_Z \mathcal{H}[f] = \mathcal{H}[\partial_Z f] \quad (3.56)$$

The Benjamin-Ono equation (Benjamin 1967; Ono 1975) for small-amplitude surface gravity waves over an infinitely deep interior employs the Hilbert transform for reasons similar to the current context. In particular, (3.56) implies

$$\mathcal{H}\partial_Z \equiv |\partial_Z|, \quad (3.57)$$

for trigonometric functions. Therefore, we may factor the Laplacian-like operator in (3.34)

$$(\partial_Z^2 + \partial_x^6) = (|\partial_Z| + \partial_x^3)(-|\partial_Z| + \partial_x^3), \quad (3.58)$$

which separates modes that decay as  $x \rightarrow \infty$  versus  $x \rightarrow -\infty$ .

Our final closure for the boundary momentum fluxes is

$$q_Y = -\mathcal{H}[q_Z], \quad (3.59)$$

which means they share the same Fourier coefficients but with different vertical parity.

### 3.2.4. Barotropic mode

Finally, we derive properties of the barotropic mode in the Stewartson layer. We first take the vertical average of the horizontal velocities

$$\langle v_{-1} \rangle = \partial_x \langle p_0 \rangle \quad (3.60)$$

$$\langle u_0 \rangle = -\partial_Y \langle p_0 \rangle + \partial_x^3 \langle p_0 \rangle \quad (3.61)$$

$$\partial_x \langle u_0 \rangle + \partial_Y \langle v_{-1} \rangle = \partial_x^4 \langle p_0 \rangle = 0. \quad (3.62)$$

Therefore,  $\langle p_0 \rangle = \langle P_0 \rangle$  within the sidewall layer, with  $\langle u_0 \rangle = -\partial_Y \langle P_0 \rangle$ . Impenetrability at the physical container boundary, along with fixing the overall pressure gauge condition, implies

$$\langle P_0 \rangle = 0 \quad \text{at} \quad x = 0, \quad X = \Gamma, \quad (3.63)$$

which is the only sidewall boundary condition needed for no-slip top and bottom boundary conditions.

Free-slip top and bottom boundaries also require the next-order barotropic momentum

balances and continuity in the sidewall layer,

$$\langle f \rangle + \partial_Y \langle p_1 \rangle + \langle u_1 \rangle = \partial_x^2 \langle v_0 \rangle \quad (3.64)$$

$$\partial_x \langle p_1 \rangle + \partial_X \langle P_0 \rangle - \langle v_0 \rangle = 0 \quad (3.65)$$

$$\partial_x \langle u_1 \rangle + \partial_X \langle U_0 \rangle + \partial_Y \langle v_0 \rangle = 0, \quad (3.66)$$

where

$$\langle f \rangle = \frac{\partial_x \langle u_0 v_{-1} \rangle + \partial_Y \langle v_{-1} v_{-1} \rangle}{\sigma}. \quad (3.67)$$

The tangential solution in the sidewall layer,

$$\langle v_0 \rangle = \partial_X \langle P_0 \rangle - \int_{-\infty}^x (x' - x) \langle f(x') \rangle dx'. \quad (3.68)$$

A no-slip boundary condition,  $\langle v_0 \rangle = 0$ , at  $x = 0$ ,  $X = \Gamma$  implies

$$\sigma \partial_X \langle P_0 \rangle = \int_{\mathbb{R}^-} x [\partial_x \langle u_0 v_{-1} \rangle + \partial_Y \langle v_{-1} v_{-1} \rangle] dx \quad (3.69)$$

$$\begin{aligned} &= \langle U_0 q_Y \rangle \int_{\mathbb{R}^-} x \partial_x [(1 - \mathcal{X}(x)) \mathcal{X}'(x)] dx + \\ &2 \langle q_Y \partial_Y q_Y \rangle \int_{\mathbb{R}^-} x \mathcal{X}'(x)^2 dx. \end{aligned} \quad (3.70)$$

Computing the coefficients,

$$\int_{\mathbb{R}^-} x \partial_x [(1 - \mathcal{X}(x)) \mathcal{X}'(x)] dx = -\frac{1}{2}, \quad \int_{\mathbb{R}^-} x \mathcal{X}'(x)^2 dx = -\frac{3}{4}. \quad (3.71)$$

Both coefficients are independent of  $\delta = \pm\pi/6$ . Putting everything together,

$$\partial_X \langle P_0 \rangle = -\frac{3 \langle q_Y \partial_Y q_Y \rangle - \langle q_Y \partial_Y P_0 \rangle}{2\sigma} \quad \text{at} \quad X = \Gamma. \quad (3.72)$$

### 3.3. Region-III (Ekman Layers)

We still need to fix the barotropic pressure,  $\langle P_0 \rangle$ , in the interior, which requires considering the vertical vorticity along with the top and bottom boundary conditions. Geostrophic balance relates the vertical vorticity and the pressure,

$$\zeta_0 \equiv \partial_X V_0 - \partial_Y U_0 = (\partial_X^2 + \partial_Y^2) P_0. \quad (3.73)$$

Taking the horizontal curl of the momentum equations and using the continuity equation,

$$\frac{1}{\sigma} (\partial_t + U_0 \partial_X + V_0 \partial_Y) \zeta_0 - (\partial_X^2 + \partial_Y^2) \zeta_0 = \partial_Z W_3 + \partial_Z^2 \zeta_0. \quad (3.74)$$

Notably, the leading-order rotational terms enforce

$$\partial_Z W_i = 0 \quad \text{for} \quad i = 0, \frac{1}{2}, 1, \frac{3}{2}, 2, \frac{5}{2}. \quad (3.75)$$

The first non-constant vertical velocity is  $W_3$ .

#### 3.3.1. Stress-free boundaries

For stress-free boundaries (2.11), applying the averaging operator to (3.74) gives

$$(z-SF): \quad \partial_t \langle \zeta_0 \rangle + \partial_X \langle U_0 \zeta_0 \rangle + \partial_Y \langle V_0 \zeta_0 \rangle = \sigma (\partial_X^2 + \partial_Y^2) \langle \zeta_0 \rangle. \quad (3.76)$$

The  $\partial_Z$  terms on the right-hand side vanish because of impenetrability and vanishing stress,

$$W_3(Z = 0) = W_3(Z = 1) = 0 \quad (3.77)$$

$$\partial_Z \zeta_0(Z = 0) = \partial_Z \zeta_0(Z = 1) = 0. \quad (3.78)$$

Eq. (3.76) determines the missing depth-independent pressure component needed to obtain the velocities in (3.14). The depth-dependent pressure (hence temperature) forces (3.76) through the nonlinear baroclinic interactions, e.g.,  $\langle U_0 \zeta_0 \rangle - \langle U_0 \rangle \langle \zeta_0 \rangle$ , and the two systems are coupled. We solve (3.76) together with boundary conditions  $\langle P_0 \rangle = 0$  and (3.72).

### 3.3.2. No-slip boundaries

For no-slip top and bottom boundaries, one expects an Ekman-pumping effect of the order (Zhang & Roberts 1998)

$$W_{\text{Ekman}} \sim E^{1/2} \zeta_0 = \varepsilon^{3/2} \zeta_0. \quad (3.79)$$

Together, (3.75) & (3.79) imply a depth-independent Ekman velocity,

$$\partial_Z W_{3/2} = 0. \quad (3.80)$$

The Ekman layers determine the barotropic pressure.

Given an interior flow, the Ekman boundary layer response follows as a well-known exercise (Greenspan 1969; Pedlosky 1987). Region-III lies beyond the sidewall Stewartson layer, hence  $\partial_x \rightarrow 0$ . Within the top and bottom boundary layers,

$$\partial_z P_0 = 0 \quad (3.81)$$

$$-v_0 + \partial_X P_0 = \partial_z^2 u_0, \quad (3.82)$$

$$u_0 + \partial_Y P_0 = \partial_z^2 v_0 \quad (3.83)$$

$$\partial_X u_0 + \partial_Y v_0 + \partial_z w_{3/2} = 0. \quad (3.84)$$

The solutions to (3.81)–(3.84) are well known. For  $Z = 0$  and the boundary layer coordinate  $0 \leq z < \infty$ . For  $Z = 1$  and the boundary layer coordinate  $-\infty < z \leq 0$ . In both cases,

$$\begin{bmatrix} u_0 \\ v_0 \end{bmatrix} = \begin{bmatrix} \text{se}(z) & \text{ce}(z) \\ -\text{ce}(z) & \text{se}(z) \end{bmatrix} \cdot \begin{bmatrix} \partial_X P_0 \\ \partial_Y P_0 \end{bmatrix}, \quad (3.85)$$

where  $P_0$  is evaluated at  $Z = 0$  or  $Z = 1$  depending on the boundary layer and the functions,

$$\text{se}(z) = e^{-\frac{|z|}{\sqrt{2}}} \sin\left(\frac{|z|}{\sqrt{2}}\right), \quad \text{ce}(z) = 1 - e^{-\frac{|z|}{\sqrt{2}}} \cos\left(\frac{|z|}{\sqrt{2}}\right). \quad (3.86)$$

Both  $\text{se}(0) = \text{ce}(0) = 0$ .

For the vertical velocity at either boundary,

$$w_{3/2} = \text{sign}(z) \frac{\zeta_0}{\sqrt{2}} (\text{ce}(z) - \text{se}(z)). \quad (3.87)$$

The Ekman pumping velocity must connect to the interior as  $|z| \rightarrow \infty$ ,

$$\lim_{|z| \rightarrow \infty} w_{3/2} = \text{sign}(z) \frac{\zeta_0}{\sqrt{2}} \quad (3.88)$$

However, in the interior  $\partial_Z W_{3/2} = 0$ . Therefore,

$$\zeta_0(X, Y, Z = 0) + \zeta_0(X, Y, Z = 1) = 0, \quad (3.89)$$

which indirectly fixes the barotropic pressure. In terms of the local pressure,

$$P_0|_{Z=0} + P_0|_{Z=1} = 2\Phi(X, Y), \quad (3.90)$$

where  $\Phi(X, Y)$  represents a two-dimensional harmonic function (the factor of two provides a later simplification). The Stewartson layer supports no barotropic pressure, and  $\Phi$  ensures  $\langle P_0 \rangle$  vanishes at the sidewall.

Given hydrostatic balance,  $\partial_Z P_0(Z) = \Theta_0(Z)$ , the pressure decomposes into barotropic and baroclinic components,

$$P_0(Z) = \langle P_0 \rangle + \int_0^Z Z_0 \Theta_0(Z_0) dZ_0 - \int_Z^1 (1 - Z_0) \Theta_0(Z_0) dZ_0. \quad (3.91)$$

Applying (3.90), the barotropic pressure is

$$\langle P_0 \rangle = \Phi(X, Y) - \int_0^1 \left( Z - \frac{1}{2} \right) \Theta_0(X, Y, Z) dZ. \quad (3.92)$$

The Stewartson layer equations imply  $\langle P_0 \rangle = 0$  within the side wall layer, thus fixing the harmonic function,  $\Phi(X, Y)$  when applying (3.92) at  $X = \Gamma$ .

While the Ekman layers in the bulk dictate leading-order dynamics of the barotropic mode, the Ekman layers within the sidewall Stewartson layers generate a lower-order passive response. There is, however, one notable aspect. The balances in the sidewall naturally produce velocities  $u_0, v_{-1}, w_{-1}$ . That is, the tangential velocities are  $\mathcal{O}(E^{-1/3})$  compared to  $\mathcal{O}(1)$  for the normal component. However, the normal component achieves its largest amplitudes in the form of an Ekman response.

Like before,  $\partial_z p_0 = 0$ . Now, the horizontal velocities are isotropic,

$$-v_{-1} + \partial_x p_0 = \partial_z^2 u_{-1}, \quad (3.93)$$

$$u_{-1} = \partial_z^2 v_{-1}. \quad (3.94)$$

The Ekman flux is now larger than within the bulk, but is still subdominant compared to the  $w_{-1}$  convection; *i.e.*,  $\partial_x u_{-1} + \partial_z w_{-1/2} = 0$ ,

$$w_{-1/2} = \text{sign}(z) \frac{\partial_x^2 p_0}{\sqrt{2}} (\text{ce}(z) - \text{se}(z)). \quad (3.95)$$

The  $w_{-1/2}$  does not automatically satisfy the no-slip condition at  $x = 0$ , which requires an  $\mathcal{O}(E^{1/2})$  corner layer (Kerswell & Barenghi 1995) that remains passive with respect to the leading-order dynamics. Solving the corner layer requires a somewhat technical direct numerical calculation (Burns *et al.* 2022). While the sidewall Ekman response remains passive in the fully asymptotic regime, we should expect noticeable corrections to heat transport for transitional values of the Rayleigh number (Stellmach *et al.* 2014; Julien *et al.* 2016).

#### 4. System summary

To summarise our multiscale asymptotic analysis, we here report the final equations in dimensional form, with all explicit parameter values restored. All equations and variables are either purely bulk quantities or supported on the bulk boundary. All boundary layers have been eliminated and act only backstage. We, therefore, drop the notation of small-case and capital letters distinguishing between different scales. All coordinates are lowercase, and all variables are in their dimensional physical form. The relevant physical



variables are velocity,  $u$ , temperature,  $T$ , vertical vorticity,  $\zeta = \hat{z} \cdot \nabla \times u$ , and wall fluxes,  $q_\ell$ ,  $q_z$ .

#### 4.1. Geometry and operators

The container is now a general upright direct product of a  $z$  direction with a smooth but otherwise arbitrary horizontal area,

$$\mathcal{V} = \mathcal{A} \times [0, H], \quad (4.1)$$

with (e.g.) Cartesian horizontal coordinates  $(x, y) \in \mathcal{A}$ , and vertical coordinate  $z \in [0, H]$ , with local unit vector,  $\hat{z}$ . The boundary of the horizontal area is  $\partial\mathcal{A}$  with the local outward normal vector,  $\hat{n}$ . In the case of a general smooth  $\partial\mathcal{A}$ , the analysis in §3.2 would follow the same reasoning with  $x$  representing a local signed-distance coordinate (Hester & Vasil 2023). We represent the coordinate along the tangential direction to  $\partial\mathcal{A}$  as  $\ell$ , with local unit vector,  $\hat{\ell} = \hat{z} \times \hat{n}$  assuming a right-handed coordinate system. For short-hand, we denote derivatives,  $\partial_z = \hat{z} \cdot \nabla$ ,  $\partial_n = \hat{n} \cdot \nabla$ , and  $\partial_\ell = \hat{\ell} \cdot \nabla$ . In the two most relevant cases,

$$\text{Cartesian:} \quad \partial_n = \partial_x, \quad \partial_\ell = \partial_y, \quad (4.2)$$

$$\text{Cylindrical:} \quad \partial_n = \partial_r, \quad \partial_\ell = \frac{1}{r} \partial_\phi. \quad (4.3)$$

We define the respective barotropic average and Hilbert transform,

$$\langle p \rangle = \frac{1}{H} \int_0^H p(z') dz', \quad \mathcal{H}[q](z) = \text{p.v.} \left\langle q(z') \cot\left(\frac{\pi(z'-z)}{H}\right) \right\rangle, \quad (4.4)$$

where p.v. denotes the principle value in the Hilbert transform integral.

#### 4.2. Dynamics

For  $(x, y) \in \mathcal{A}$ ,

$$2\Omega \partial_z u = g\alpha \hat{z} \times \nabla T, \quad \partial_t T + u \cdot \nabla T = \kappa \nabla^2 T, \quad (4.5)$$

$$T|_{z=0} = T_{\text{bot}}, \quad T|_{z=H} = T_{\text{top}}. \quad (4.6)$$

For  $(x, y) \in \partial\mathcal{A}$ ,

$$q_\ell = -\mathcal{H}[q_z], \quad \partial_\ell q_\ell + \partial_z q_z = u_n, \quad (q_\ell \partial_\ell + q_z \partial_z) T = -\kappa \partial_n T, \quad (4.7)$$

$$q_z = 0 \quad \text{for} \quad z = 0, H. \quad (4.8)$$

For vertical no-slip,

$$\zeta|_{z=0} + \zeta|_{z=H} = 0. \quad (4.9)$$

For vertical stress-free,

$$\partial_t \langle \zeta \rangle + \nabla \cdot \langle u \zeta \rangle = \nu \nabla^2 \langle \zeta \rangle, \quad -2\nu \langle u_\ell \rangle|_{\partial\mathcal{A}} = \langle q_\ell (4 \partial_\ell q_\ell + \partial_z q_z) \rangle. \quad (4.10)$$

#### 4.3. Heat transport

Heat transport is an essential diagnostic in convection-dominated systems, with much work for laboratory and natural systems still ongoing (Doering *et al.* 2019; Schumacher & Sreenivasan 2020; Vasil *et al.* 2021; Lohse & Shishkina 2024). Rapid rotation adds many additional nuances (Julien *et al.* 2012; Stellmach *et al.* 2014; Julien *et al.* 2016). In studies of bulk convection, heat transport from wall modes tends to confound measurements, and efforts have attempted to quantify their influence (Terrien *et al.* 2023).

At first glance, the reduced wall-mode equations do not appear to contain any means for vertical heat transport; there is no bulk vertical velocity. The resolution occurs when taking into account the sidewall heat fluxes. All the vertical heat transport happens in the sidewall layer, which manifests within the bulk via  $q_z$ .

Defining the horizontal average,  $\bar{T}$ , the mean thermal equation,

$$\partial_t \bar{T} + \partial_z \left[ \frac{1}{|\mathcal{A}|} \oint_{\partial\mathcal{A}} q_z T \, dl - \kappa \partial_z \bar{T} \right] = 0. \quad (4.11)$$

The integrated boundary term follows straightforwardly from integrating the bulk equation and applying (4.7). When the system is in thermal equilibrium, the Nusselt number is a global constant with

$$Nu = \frac{1}{|\mathcal{A}|} \oint_{\partial\mathcal{A}} q_z \Theta \, dl - \kappa \partial_z \bar{T}, \quad (4.12)$$

where in this case  $\Theta = T - \bar{T}$ .

When considering the boundary terms in (3.15), we also now find the nontrivial wall-modes ‘‘power integral’’ (Howard 1963) that regulates overall input and dissipation,

$$\frac{1}{2} \frac{d}{dt} \langle \overline{\Theta^2} \rangle = \frac{1}{|\mathcal{A}|} \oint_{\partial\mathcal{A}} \langle q_z \partial_z \bar{T} \Theta \rangle \, dl - \kappa \langle |\nabla \Theta|^2 \rangle. \quad (4.13)$$

In both cases, it is clear the vertical velocity behaves precisely as a Dirac- $\delta$  distribution supported on the boundary; e.g., in local Cartesian coordinates with the wall at  $x = 0$ ,

$$w(x, y, z) = q_z(y, z) \delta(x), \quad (4.14)$$

where the  $\delta$ -function replaces the detailed behaviour within the sidewall layer.

## 5. Linear Instability

From now on, we revert to the same non-dimensionalisation used throughout the asymptotic analysis. However, we do not use mixtures of lowercase and capital letters to distinguish between boundary layer and bulk quantities. All variables and coordinates are bulk-only; hence, we use their standard nomenclature.

For the temperature perturbations linearised around a vertical gradient,  $T = R(1 - z) + \theta(x, y, z)$ ,

$$\partial_t \theta = \nabla^2 \theta, \quad \theta = \partial_z p \quad (5.1)$$

$$R q_z = \partial_n \theta, \quad \partial_\ell q_\ell + \partial_z q_z = -\partial_\ell p \quad q_\ell = -\mathcal{H}[q_z] \quad (5.2)$$

The linearised equations collapse into a single equation and set of boundary conditions for the temperature perturbations.

$$\partial_t \theta = \nabla^2 \theta \quad \text{in} \quad \mathcal{A} \times [0, 1] \quad (5.3)$$

$$(\partial_\ell + |\partial_z|) |\partial_z| \partial_n \theta = R \partial_\ell \theta \quad \text{on} \quad \partial\mathcal{A} \times [0, 1], \quad (5.4)$$

where  $|\partial_z| = \mathcal{H} \partial_z$ . For the top and bottom boundary conditions,

$$\theta|_{z=0} = \theta|_{z=1} = 0. \quad (5.5)$$

### 5.1. Semi-infinite channel

This section reproduces the final results in Herrmann & Busse (1993) with the advantage that now all aspects are physically apparent. We assume a semi-infinite domain with the

wall-normal coordinate,  $-\infty < x \leq 0$  and harmonic dependence along the wall,  $\sim e^{iky}$ , with wavenumber  $k$ .

The following exponential profile satisfies the boundary condition at  $x = 0$ ,

$$\theta = e^{\beta x + i(ky + \omega t)} \sin(\pi z) + \text{c.c.} \quad \text{where} \quad \beta = \frac{k(k + i\pi)R}{\pi(k^2 + \pi^2)}. \quad (5.6)$$

Assuming  $R > 0$ , the temperature perturbations decays as  $x \rightarrow -\infty$ . The bulk evolution equation gives the dispersion relation for the complex-valued frequency

$$\omega = \frac{2k^3 R^2}{\pi(\pi^2 + k^2)^2} - i \frac{k^2(k^2 - \pi^2)R^2 - \pi^2(\pi^2 + k^2)^3}{\pi^2(\pi^2 + k^2)^2} \quad (5.7)$$

The real-valued growth rate,

$$\gamma = -\Im(\omega) = \frac{k^2(k^2 - \pi^2)R^2 - \pi^2(\pi^2 + k^2)^3}{\pi^2(\pi^2 + k^2)^2}. \quad (5.8)$$

The growth rate is positive for

$$R \geq R_c(k) = \frac{\pi(k^2 + \pi^2)^{3/2}}{k(k^2 - \pi^2)^{1/2}} \geq R_c(k_c) = \pi^2 \sqrt{6\sqrt{3}} \approx 31.8167 \quad (5.9)$$

The respective critical wavenumber and frequency are

$$k_c = \pi \sqrt{2 + \sqrt{3}} \approx 6.0690, \quad \omega_c = 2\pi^2 \sqrt{3(2 + \sqrt{3})} \approx 66.0487. \quad (5.10)$$

The sign convention for frequency means that  $\omega > 0$  moves retrograde to the background rotation,  $\Omega$ . The respective phase and group speeds,

$$\frac{\omega_c}{k_c} = 2\sqrt{3}\pi \approx 10.8828, \quad \left. \frac{\partial \omega}{\partial k} \right|_{k_c, R_c} = 2(\sqrt{3} - 2)\pi \approx -1.68357. \quad (5.11)$$

Notably, the group speed is always prograde above onset.

Even though we remove the explicit Stewartson boundary layer, at onset, the temperature perturbations remain quite localised near the wall (on the bulk scale,  $x$ ), where

$$\beta_c = \pi \sqrt{3 + 2\sqrt{3}} + i\pi 3^{1/4} \approx 7.9873 + 4.1345i. \quad (5.12)$$

In physical units, the critical wavelength along the wall is approximately  $\lambda_y \approx 1.04 H$  and the  $e$ -folding length away from the wall is  $\lambda_x \approx 0.13 H$ .

For large  $R$  the growth rate,

$$\gamma \sim \frac{R^2}{\pi^2} - \frac{k^4 + 3R^2}{k^2} + \mathcal{O}(1) \quad \text{as} \quad R \rightarrow \infty. \quad (5.13)$$

The fastest-growing wavenumber,  $k$  maximises the 2nd term with  $k \sim 3^{1/4} \sqrt{R}$  leaving

$$\gamma \sim \frac{R^2}{\pi^2} - 2\sqrt{3}R + \mathcal{O}(1) \quad \text{as} \quad R \rightarrow \infty. \quad (5.14)$$

The severe dependence of  $\gamma$  on  $R$  makes nonlinear simulations very stiff at high values of criticality. For example, when  $R = 5 R_c(k_c)$ ,  $\gamma \approx 2500$ . Fast timescales exist for the propagation as well. As  $R \rightarrow \infty$  the phase and group speeds are exactly opposite,

$$c_p \sim \frac{2R}{\sqrt{3}\pi} - \frac{4\pi}{3}, \quad c_g \sim -\frac{2R}{\sqrt{3}\pi} - 4\pi. \quad (5.15)$$

Reintroducing physical parameters implies the dimensional growth rate in the large- $R$

limit,

$$\gamma^* \sim \frac{(g\alpha\Delta T)^2}{(2\Omega)^2\kappa}, \quad (5.16)$$

which is notably independent of the container size.

### 5.2. Ekman-pumping correction

In §1, we report the critical Rayleigh numbers, including the leading-order corrections due to Ekman pumping effects in (1.3) & (1.4). The  $\mathcal{O}(Ta^{7/12})$  correction to the bulk  $Ra$  has an interesting history. The  $\mathcal{O}(Ta^{5/12})$  correction to the wall  $Ra$  has not, to our knowledge, been calculated before.

In his famous book, Chandrasekhar (1961) calculated the leading-order contribution for bulk modes (unaware of wall modes at the time) using sound asymptotic methods,

$$Ra \sim (27\pi^4/4)^{1/3} Ta^{2/3}, \quad \text{as} \quad Ta \rightarrow \infty. \quad (5.17)$$

However, when comparing to numerical calculations up to  $Ta \approx 10^{12}$  he noticed a discrepancy for no-slip boundary conditions that appeared like an offset in the numerical proportionality factor, commenting “... *the discussion is not ‘fine’ enough to account for the differences in the constants of proportionality ...*” (Chandrasekhar 1961, §27d “The origin of the  $T^{2/3}$ -law”). The resolution of the issue is that the relative leading-order correction is  $\propto Ta^{-1/12}$ , which produces a noticeable change for realistic numerical and laboratory parameter values. Ekman pumping manifests especially clearly in heat-transport enhancement (King *et al.* 2009; Stellmach *et al.* 2014; Julien *et al.* 2016). The upshot is that Chandrasekhar’s discussion was ‘fine’ enough; it simply did not go far enough.

The issue became fully resolved when Zhang & Roberts (1998) showed the leading-order correction results from considering the Ekman pumping boundary conditions of the form we use in §3.3 (3.88), together with a leading-order interior equation of the form as (3.35). The critical bulk Rayleigh number and wavenumber,

$$Ra \sim (27\pi^4/4)^{1/3} Ta^{2/3} - (8192\pi^4)^{1/6} Ta^{7/12} \quad (5.18)$$

$$k \sim (\pi^2/2)^{1/6} Ta^{1/6} - (27\pi^4/4)^{-1/3} Ta^{1/12}, \quad (5.19)$$

as  $Ta \rightarrow \infty$ . We use analogous techniques to find the equivalent correction for wall modes.

The Ekman flux in the bulk is much too small to produce a significant correction. However, in the sidewall,

$$\partial_x p_{1/2} - v_{-1/2} = 0 \quad (5.20)$$

$$\partial_Y p_{1/2} + u_{1/2} - \partial_x^2 v_{-1/2} = 0 \quad (5.21)$$

$$\partial_Z p_{1/2} - \partial_x^2 w_{-1/2} = \Theta_{1/2} \quad (5.22)$$

$$\partial_x u_{1/2} + \partial_Y v_{-1/2} + \partial_Z w_{-1/2} = 0. \quad (5.23)$$

The boundary condition is the key difference from the leading order,

$$w_{-1/2} = \mp \frac{\partial_x^2 p_0}{\sqrt{2}} \quad \text{at} \quad Z = 0, 1. \quad (5.24)$$

Projecting the system on to the relevant  $2 \cos(n\pi Z)$  and  $2 \sin(n\pi Z)$  functions,

$$\partial_x \hat{p}_{n,1/2} - \hat{v}_{n,-1/2} = 0 \quad (5.25)$$

$$\partial_Y \hat{p}_{n,1/2} + \hat{u}_{n,1/2} - \partial_x^2 \hat{v}_{n,-1/2} = 0 \quad (5.26)$$

$$-\alpha_n^3 \hat{p}_{n,1/2} - \partial_x^2 \hat{w}_{n,-1/2} = \hat{\Theta}_{n,1/2} \quad (5.27)$$

$$\partial_x \hat{u}_{n,1/2} + \partial_Y \hat{v}_{n,-1/2} + \alpha_n^3 \hat{w}_{n,-1/2} = \sum_{m+n=\text{even}} \sqrt{2} \alpha_m^2 \hat{Q}_m \mathcal{X}''(\alpha_m x), \quad (5.28)$$

where recalling  $\alpha_n = (n\pi)^{1/3}$ . The right-hand side results from integrating by parts in  $Z$  and using the Ekman boundary conditions,

$$2 \int_0^1 \cos(n\pi Z) \partial_Z w(Z) dZ = n\pi \hat{w}_n + 2 [(-1)^n w(1) - w(0)], \quad (5.29)$$

where by definition

$$\hat{w}_n = 2 \int_0^1 \sin(n\pi Z) w(Z) dZ. \quad (5.30)$$

The solution to the system is straightforward but messy. However, to close the bulk dynamics, we only need the relationship between  $q_Y$  and  $q_Z$ .

The final result in general form (dropping the  $X, Y, Z$  bulk notation),

$$q_\ell + \mathcal{H}[q_z] = -\sqrt{\varepsilon} \mathcal{E}[q_\ell] \quad \text{where} \quad \sqrt{\varepsilon} = E^{1/6}. \quad (5.31)$$

The right-hand side contains the highly nonlocal operator

$$\widehat{\mathcal{E}}[q]_n = \frac{2\sqrt{2}}{\pi^{2/3}} \sum_{m+n=\text{even}} \frac{m}{(nm)^{1/3}(m+n)} \hat{q}_m. \quad (5.32)$$

We can now continue to find the  $\mathcal{O}(\varepsilon^{1/2})$  perturbation to  $R, \omega, k$  from the semi-infinite stability problem:

$$\partial_t \theta_{1/2} + \partial_\tau \theta_0 = \nabla^2 \theta_{1/2}, \quad (5.33)$$

$$\theta_{1/2} = \partial_z p_{1/2} \quad (5.34)$$

$$R_0 q_{z,1/2} + R_{1/2} q_{z,0} = \partial_n \theta_{1/2}, \quad (5.35)$$

$$\partial_y q_{y,1/2} + \partial_z q_{z,1/2} = -\partial_y p_{1/2}, \quad (5.36)$$

$$q_{y,1/2} + \mathcal{H}[q_{z,1/2}] = -\frac{\sqrt{2}}{\pi^{2/3}} q_{y,0}. \quad (5.37)$$

The system has an extra  $R_{1/2}$  term along with an  $\mathcal{O}(\varepsilon^{1/2})$  timescale,  $\partial_\tau$ . For a given wavenumber along the wall,  $k$ ,

$$R_{1/2} = -\frac{\sqrt{2}\pi^{1/3}k(k^2 - 3\pi^2)\sqrt{k^2 + \pi^2}}{(k^2 - \pi^2)^{3/2}}, \quad \omega_{1/2} = \frac{2\sqrt{2}\pi^{1/3}k(k^2 + \pi^2)^2}{(k^2 - \pi^2)^2}. \quad (5.38)$$

Optimising the combined reduced Rayleigh number,  $R \sim R_0(k) + \sqrt{\varepsilon} R_{1/2}(k)$ , over  $k$  yields

$$R \sim \sqrt{6\sqrt{3}}\pi^2 - \sqrt{\varepsilon} \sqrt{4\sqrt{3} - 6}\pi^{4/3} \approx 31.8167 - 4.4329\sqrt{\varepsilon}, \quad (5.39)$$

$$k \sim \sqrt{2 + \sqrt{3}}\pi + \sqrt{\varepsilon} \frac{5(1+\sqrt{3})}{6}\pi^{1/3} \approx 6.06909 + 3.33445\sqrt{\varepsilon}, \quad (5.40)$$

$$\omega \sim 2\sqrt{3(2 + \sqrt{3})}\pi^2 + \sqrt{\varepsilon} \frac{(23+13\sqrt{3})}{3}\pi^{4/3} \approx 66.0487 + 69.8097\sqrt{\varepsilon}, \quad (5.41)$$

as  $\varepsilon \rightarrow 0$ . The next section computes the critical onset parameters directly.

## 5.3. Direct numerical calculations

We validate the asymptotic correction from §5.2 with high-precision direct numerical calculations of the critical Rayleigh number, wave number and precession frequency over a range of very small but finite Ekman numbers. We solve a linearised version of (2.4)–(2.8) in a finite Cartesian channel assuming  $y$ -direction Fourier dependence with a complex-valued growth rate, *i.e.*,

$$\frac{1}{\sigma}(\gamma + i\omega)u + \frac{\partial_x p - v}{E} = (\partial_x^2 + \partial_z^2 - k^2)u, \quad (5.42)$$

$$\frac{1}{\sigma}(\gamma + i\omega)v + \frac{ikp + u}{E} = (\partial_x^2 + \partial_z^2 - k^2)v, \quad (5.43)$$

$$\frac{1}{\sigma}(\gamma + i\omega)w + \frac{\partial_z p - \theta}{E} = (\partial_x^2 + \partial_z^2 - k^2)w, \quad (5.44)$$

$$\partial_x u + ikv + \partial_z w = 0, \quad (5.45)$$

$$(\gamma + i\omega)\theta - Rw = (\partial_x^2 + \partial_z^2 - k^2)\theta, \quad (5.46)$$

Nominally, the system has no-slip boundary conditions on all walls. For the top and sides of the domain,

$$u = v = w = 0 \quad \text{at} \quad z = 1, \quad \text{and} \quad x = 0, \Gamma. \quad (5.47)$$

However, vertical reflection symmetry,  $z \rightarrow 1 - z$ , implies we can save computational cost by restricting to only the upper-half domain with mid-plane conditions,

$$u = v = p = \partial_z \theta = 0 \quad \text{at} \quad z = \frac{1}{2}. \quad (5.48)$$

The perfectly insulating thermal boundary condition at  $x = \Gamma$  implies  $\partial_x \theta = 0$ . We impose perfectly conducting conditions at all other walls,  $\theta = 0$  at  $x = 0$  and  $z = 1$ . The conducting condition at  $x = 0$  isolates the dynamics only to the  $x = \Gamma$  boundary with quasi-exponential decay into the interior.

We use Dedalus to implement a continuous Galerkin spectral-element solver for (5.42)–(5.48) with a  $3 \times 3$  array of elements scaled to capture the extreme boundary-layer behaviour for  $E \ll 1$ . Each subdomain uses a tensor-product discretisation with between 20–120 polynomial modes in each direction, chosen so that the solutions in each element are resolved to a truncation error of  $\approx 10^{-6}$ .

We find the minimum onset value for  $R$  as a function of  $k$  at fixed  $E$  by solving the simultaneous equations for the growth rate,

$$\gamma(k, R) = \partial_k \gamma(k, R) = 0. \quad (5.49)$$

We solve these equations numerically by computing  $\gamma(k, R)$  on a  $3 \times 3$  grid of  $(k, R)$  input values in the vicinity of the leading-order solution and interpolating with a local polynomial approximation of the form

$$\gamma(k, R) \approx \gamma_{0,0} + \gamma_{1,0}k + \gamma_{2,0}k^2 + \gamma_{0,1}R. \quad (5.50)$$

We update the approximate solution to (5.49) from the polynomial fit via,

$$k \approx -\frac{\gamma_{1,0}}{2\gamma_{2,0}}, \quad R \approx \frac{\gamma_{1,0}^2}{4\gamma_{0,1}\gamma_{2,0}} - \frac{\gamma_{0,0}}{\gamma_{0,1}}. \quad (5.51)$$

The true solution need not lie exactly within the original  $3 \times 3$  grid; the polynomial approximation can extrapolate slightly outside the fitting range. We perform the procedure

$-\log_{10} E$	$R$	$k$	$\omega$
6.0	31.7913	5.9922	63.905
6.5	31.7594	6.0634	65.652
7.0	31.7390	6.1051	66.673
7.5	31.7280	6.1271	67.211
8.0	31.7249	6.1362	67.440
8.5	31.7270	6.1375	67.483
9.0	31.7326	6.1345	67.427
9.5	31.7399	6.1290	67.314
10.0	31.7484	6.1227	67.179
10.5	31.7560	6.1160	67.036
11.0	31.7646	6.1091	66.904
$\infty$	31.8167...	6.0691...	66.049...

TABLE 1. Direct spectral element calculations of the stability threshold at various Ekman number. Values of  $R$ ,  $k$ , and  $\omega$  have estimated respective uncertainties of 4e-4, 3e-4, and 3e-3, with asymptotic analytical results reported to the same number of digits.

with both Chebyshev and Legendre polynomial discretisations to estimate the numerical uncertainty in the critical parameters, which are in the 4th digit or smaller. The asymptotic results are independent of  $\sigma$ . We set the Prandtl number  $\sigma = 1$  throughout. We use both  $\Gamma = 2, 4$  over the whole range of  $E$ . The results agree to within the other uncertainties of the calculation.

We scan over a range of powers of Ekman number with  $-\log_{10} E \geq 6$ . These go to 11. Most groups be playing at 6 (see fig. 1). What we do, is, if we need that extra push over the cliff, you know what we do? We put it up to 11. Table 1 reports the onset critical parameters,  $(R, k, \omega)$ , from the scans over  $E$ . We perform five-term fits for the critical parameters in powers of  $\varepsilon = E^{1/3}$  as

$$R(\varepsilon) \approx R_0 + R_{1/2} \varepsilon^{1/2} + R_1 \varepsilon + R_{3/2} \varepsilon^{3/2} + R_2 \varepsilon^2, \quad (5.52)$$

$$k(\varepsilon) \approx k_0 + k_{1/2} \varepsilon^{1/2} + k_1 \varepsilon + k_{3/2} \varepsilon^{3/2} + k_2 \varepsilon^2, \quad (5.53)$$

$$\omega(\varepsilon) \approx \omega_0 + \omega_{1/2} \varepsilon^{1/2} + \omega_1 \varepsilon + \omega_{3/2} \varepsilon^{3/2} + \omega_2 \varepsilon^2. \quad (5.54)$$

Figure 4 shows plots over the values covered along with the respective bit-fit curves. Table 2 shows the best-fit parameters. The  $R_0$ ,  $R_{1/2}$ ,  $k_0$ ,  $k_{1/2}$  and  $\omega_0$ ,  $\omega_{1/2}$  all agree with the predictions in §5.2 to the number of reported digits.

#### 5.4. Finite cylinder

In the finite cylinder case, we use polar coordinates,  $(r, \phi, z)$ , where the radius  $0 \leq r \leq \Gamma/2$  and azimuth angle  $0 \leq \phi < 2\pi$ , where  $\Gamma$  denotes the non-dimensional diameter or aspect ratio.

In this case, we solve the bulk equation first and substitute the result into the boundary condition. The radial dependence uses modified Bessel functions of the 1st kind,  $I_m$ , with integer wavenumber,  $m \in \mathbb{Z}$ ,

$$\theta(r, \phi, z) = I_m(\beta r) e^{i(m\phi + \omega t)} \sin(\pi z) + \text{c.c.}, \quad (5.55)$$

where  $\beta = \sqrt{\pi^2 + i\omega}$ .

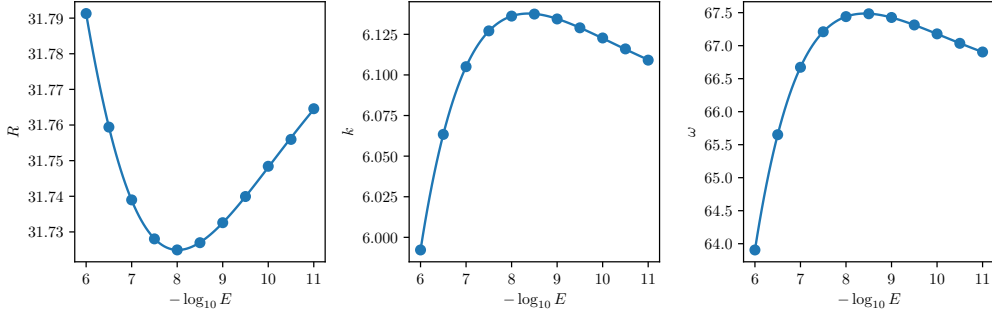


FIGURE 4. Plots of critical parameters versus Ekman number for  $6 \leq -\log_{10} E \leq 11$  from the spectral-element calculations of (5.42)–(5.48). From left to right, the panels show scaled Rayleigh number,  $R$ , tangential wave number,  $k$ , and precession frequency,  $\omega$ . The coefficients of the best-fit expansions in powers of  $E^{1/6}$  are given in Table 2.

$\mathcal{O}(\varepsilon^p)$	0	1/2	1	3/2	2
$R$	31.817(2)	-4.5(2)	65(8)	-253(102)	258(450)
$k$	6.067(2)	3.5(1)	-42(5)	-28(63)	290(276)
$\omega$	66.06(2)	69(2)	-709(56)	-3573(718)	16375(3168)

TABLE 2. Best-fit coefficients for critical parameters as a function of powers of  $\varepsilon = E^{1/3}$ , computed using spectral-element calculations of (5.42)–(5.48) and plotted in fig. 4.

The dispersion relation follows from the boundary condition applied at the outer radius

$$R = \pi\beta \left( 1 + \frac{\pi\Gamma}{2im} \right) \frac{I'_m(\beta\Gamma/2)}{I_m(\beta\Gamma/2)}, \quad (5.56)$$

where  $\Im(R) = 0$  fixes the critical frequency,  $\omega$ , given  $m$  and  $\Gamma$ . We define  $R_c$  and  $\omega_c$  as their respective values when minimising  $R$  over integer  $m$  values.

Fig. 5 shows the dependence of  $R_c$  and  $\omega_c$  on aspect ratio,  $\Gamma$ . The cusp-like features in both plots correspond to discrete changes in the optimal  $m$  value. At the lowest aspect ratios, the optimal  $m = 1$  and scales approximately as  $m \sim \lceil \Gamma k_c/2 \rceil$ . Compared to the various Ekman-number corrections the finite cylinder has a much stronger,  $\mathcal{O}(1)$ , influence on the onset Rayleigh number.

Fig. 6 shows two critical mid-plane temperature perturbation profiles for respective aspect ratios,  $\Gamma = 1, 3$ .

For  $\Gamma = 1$ ,  $R_c \approx 29.26899820255448$ ,  $\omega_c \approx 68.93822823201539$  with  $m_c = 3$ .

For  $\Gamma = 3$ ,  $R_c \approx 30.84620681276749$ ,  $\omega_c \approx 66.29068835812032$  with  $m_c = 9$ .

### 5.5. Local baroclinic instability

When assembled in one place, it becomes apparent that the wall-mode system is closely akin to the well-known *planetary geostrophy* (PG) equations, which typically model global-scale stratified ocean dynamics away from coastlines (Vallis 2017, Ch. 5). The



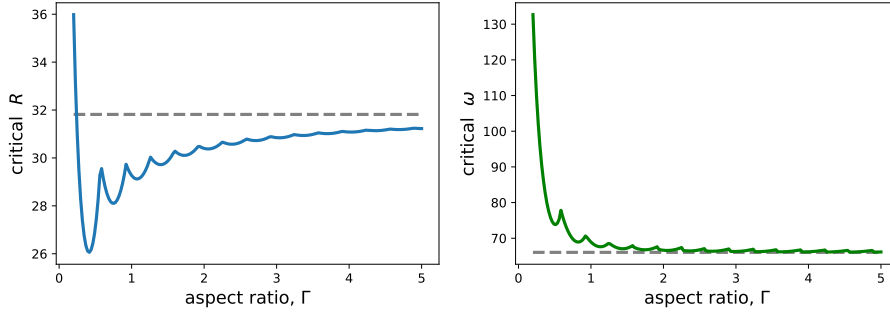


FIGURE 5. Critical parameters for a finite cylinder with aspect ratio,  $\Gamma$ . In each case, the dashed lines show the value for the semi-infinite channel. The critical wavenumber is typically within one of  $m \approx \lceil \Gamma k_c/2 \rceil$ , where  $k_c$  is the critical wavenumber from the semi-infinite case. Starting from  $m = 1$ , for low aspect ratio, each cusp feature in  $R_c$  indicates a unit increase in  $m$ .

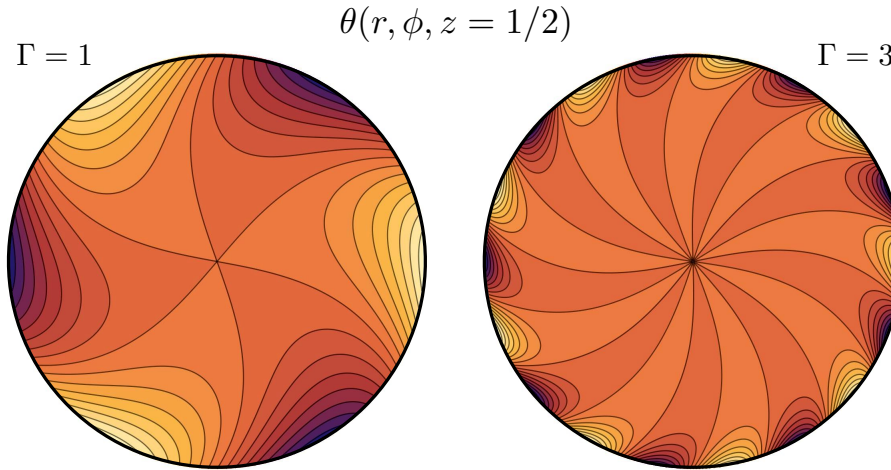


FIGURE 6. The mid-plane linear temperature perturbations from two critical modes at aspect ratios 1 and 3, respectively. The  $\Gamma = 1$  case prefers  $m = 3$  angular wavenumber, while  $\Gamma = 3$  prefers  $m = 9$ .

PG system has rich dynamical structure. However, a common puzzle is the lack of self-consistent forcing and eventual rundown (Schonbek & Vallis 1999). Several works have considered coupling to smaller-scale *quasi-geostrophic* (QG) dynamics as an intriguing alternative (see Grooms *et al.* 2011).

This context clarifies that the wall-mode convection equations are a sideways forced PG-QG system that relies on non-hydrostatic QG (similar to Sprague *et al.* 2006; Julien & Knobloch 2007) near lateral boundaries and interacts with a barotropic QG system in the stress-free case. However, we can also study the wall-mode equations without the lateral boundary interactions.

In a highly reduced setting, the combined baroclinic temperature and barotropic vorticity equations have a rudimentary form of baroclinic instability. To demonstrate, we neglect all diffusion and boundary conditions. Hence,

$$\partial_t \partial_z \psi + J(\psi, \partial_z \psi) = 0 \quad \partial_t \langle \nabla_{\perp}^2 \psi \rangle + \langle J(\psi, \nabla_{\perp}^2 \psi) \rangle = 0. \quad (5.57)$$

The baroclinic equation has a family of exact nonlinear solutions,

$$\psi = P_0(z) + x V_0(z) + (c + V_0(z)) A(y + ct) + \text{c.c.}, \quad (5.58)$$

where  $V_0(z)$  is an arbitrary  $y$ -direction velocity profile (without loss of generality,  $\langle V_0 \rangle = 0$ ),  $P_0(z)$  is an arbitrary hydrostatic pressure,  $A(y + ct)$  is an arbitrary complex-valued amplitude function, and  $c$ , is a complex-valued phase speed.

The barotropic equation requires the solvability condition,

$$\langle (c + V_0)^2 \rangle = 0 \quad \implies \quad c = \pm i \|V_0\|. \quad (5.59)$$

For example,  $V_0 = z - 1/2$ ,  $c = \pm i/\sqrt{12}$ , or  $V_0 = \cos(\pi z)$ ,  $c = \pm i/\sqrt{2}$ . When  $A(y) = A_0 e^{iky}$  for wavenumber  $k$ , then the growth rate is  $k \|V_0\|$ .

## 6. Nonlinear simulations

Using Dedalus (Burns *et al.* 2020), we simulate the full nonlinear system of reduced wall-mode equations summarised in §4. We use a full cylinder with radius  $0 \leq r \leq \Gamma/2$ , azimuth  $0 \leq \phi < 2\pi$  and height  $0 \leq z \leq 1$ . We use a spectral basis of generalised Zernike polynomials that naturally represent scalars, vectors and tensors in the full unit disk, including  $r = 0$  with no singularities; see Vasil *et al.* (2016) for details.

### 6.1. Setup

We use the same non-dimensional form as the asymptotic analysis with control parameters  $R$ ,  $\sigma$  and  $\Gamma$ . We use  $p(r, \phi, z)$  as the primary dynamical variable for the bulk. The respective thermal wind relations follow,

$$\Theta = \partial_z p, \quad u_\perp = \mathcal{J} \cdot \nabla_\perp p \quad \text{where} \quad \mathcal{J} = \hat{\phi} \otimes \hat{r} - \hat{r} \otimes \hat{\phi}. \quad (6.1)$$

We represent  $p(r, \phi, z)$  in a vertical cosine series,  $\cos(n\pi z)$ . The temperature perturbations,  $\Theta(r, \phi, z)$ , are naturally a sine series  $\sin(n\pi z)$ . For  $n \geq 1$ , the baroclinic evolution equation

$$\partial_t \Theta - (\nabla_\perp^2 + \partial_z^2) \Theta = -u_\perp \cdot \nabla_\perp \Theta. \quad (6.2)$$

We use a second-order accurate multi-stage, mixed implicit-explicit time-stepping scheme (SBDF scheme from Wang & Ruuth 2008), with linear terms on the left-hand side treated implicitly and the nonlinear right-hand side treated explicitly. The time-step size follows a CFL criterion with a 0.2 safety factor. Because of the fine radial grid spacing near the walls, normal flow through the outer boundary principally determines the time-step size.

For the outer boundary conditions at  $r = \Gamma/2$ , we use  $q_z(\phi, z)$  as an additional primary variable and define,

$$q_\phi = \mathcal{H}[q_z]. \quad (6.3)$$

At  $r = \Gamma/2$ , and for  $n \geq 1$ , the boundary conditions,

$$\nabla_\phi q_\phi + \partial_z q_z - \hat{r} \cdot u_\perp = 0 \quad (6.4)$$

$$R q_z - \hat{r} \cdot \nabla_\perp \Theta = (q_\phi \nabla_\phi + q_z \partial_z) \Theta, \quad (6.5)$$

where  $\nabla_\phi = \hat{\phi} \cdot \nabla_\perp = r^{-1} \partial_\phi$ . As before, all linear terms are time-implicit and nonlinear terms are explicit.

The  $n = 0$  barotropic pressure mode has different dynamics depending on the velocity boundary conditions on the top and bottom. In both cases, we define the vorticity,  $\zeta = \nabla_\perp^2 p$ .

For stress-free, we evolve the  $n = 0$  vorticity equation,

$$\partial_t \langle \zeta \rangle - \sigma \nabla_{\perp}^2 \langle \zeta \rangle = -\nabla_{\perp} \cdot \langle \mathbf{u}_{\perp} \zeta \rangle, \quad (6.6)$$

with, again, the usual linear-nonlinear implicit-explicit time splitting. For boundary conditions at  $r = \Gamma/2$ ,

$$\langle p \rangle = 0, \quad -2\sigma \hat{r} \cdot \nabla_{\perp} \langle p \rangle = 3\langle q_{\phi} \nabla_{\phi} q_{\phi} \rangle - \langle q_{\phi} \nabla_{\phi} p \rangle. \quad (6.7)$$

For no-slip, the  $n = 0$  mode involves a bit of subtlety. The Ekman boundary condition directly mixes barotropic and baroclinic variables, and parity mixes sine and cosine series. Vasil *et al.* (2008*a,b*) discusses issues of this kind in detail. The problem is that we need to represent expressions like (3.92) spectrally using sine/cosine series. We fix the barotropic pressure via

$$\nabla_{\perp}^2 \langle p \rangle = \nabla_{\perp}^2 \langle K_N \Theta \rangle, \quad (6.8)$$

with the boundary condition  $\langle p \rangle = 0$  at  $r = \Gamma/2$ . We use the finite spectral representation of  $1/2 - z$ ,

$$K_N(z) = \sum_{n=1}^{N/2} \frac{\sin(2\pi n z)}{n\pi} \rightarrow \frac{1}{2} - z \quad \text{as } N \rightarrow \infty. \quad (6.9)$$

A sufficiently large resolution parameter,  $N$ , captures the integral exactly. That is,

$$\int_0^1 K_N(z) \sin(n\pi z) dz = \int_0^1 \left( \frac{1}{2} - z \right) \sin(n\pi z) dz \quad (\textit{exactly}) \quad (6.10)$$

for all  $n \leq N$ . The advantage is that  $K_N$  is a natural sine series having a natural inner product with  $\Theta$ .

## 6.2. Results

We first use the methods described above to simulate the reduced wall-mode equations with no-slip boundary conditions,  $R = 2R_c$ , and  $\Gamma = 4/5$ . For this choice of  $\Gamma$ , the most unstable mode at  $R = R_c$  has an azimuthal wavenumber  $m = 2$  (fig. 5). We initialise the simulation with random low-amplitude noise, which triggers the wall-mode instability. At  $R = 2R_c$ , the modes  $m = 2, 3, 4, 5, 6$  all have positive growth rates, and  $m = 3, 4$  have the largest growth rates with  $\gamma/\omega_c \approx 2.3$  and  $\omega/\omega_c \approx 3.1, 2.7$  respectively.

The instability saturates nonlinearly, producing characteristic patterns which propagate retrograde. In fig. 7, we plot the temperature near the wall and at mid-height as a function of  $\phi$  and  $t$ . The downward propagation of the constant temperature stripes shows the retrograde motion. Initially, the dominant mode has  $m = 3$ , but a coarsening event at  $t \approx 0.1$  results in a steady  $m = 2$  pattern that persists for the rest of the simulation. Others have also found coarsening dynamics in similar systems (Ecke *et al.* 1992; Liu & Ecke 1997; Plaut 2003; Scheel *et al.* 2003; Choi *et al.* 2004; Lopez *et al.* 2007; Favier & Knobloch 2020). We chose  $\Gamma = 4/5$  because the simulations yield an  $m = 2$  pattern, meaning that the simulations have more azimuthal resolution elements per wavelength than simulations with the same resolution but higher  $m$ .

Having found a steady propagating solution for no-slip boundary conditions and  $R = 2R_c$ , we bootstrap simulations to progressively higher and lower  $R$  and simulations with stress-free boundary conditions. We run each simulation until it reaches thermal equilibrium. Starting from the saturated state with a similar  $R$  means that our subsequent simulations run much shorter than fig. 7. In each case, we find the  $m = 2$  structure persists. Table 3 lists all simulations described in this paper and their spatial resolution.

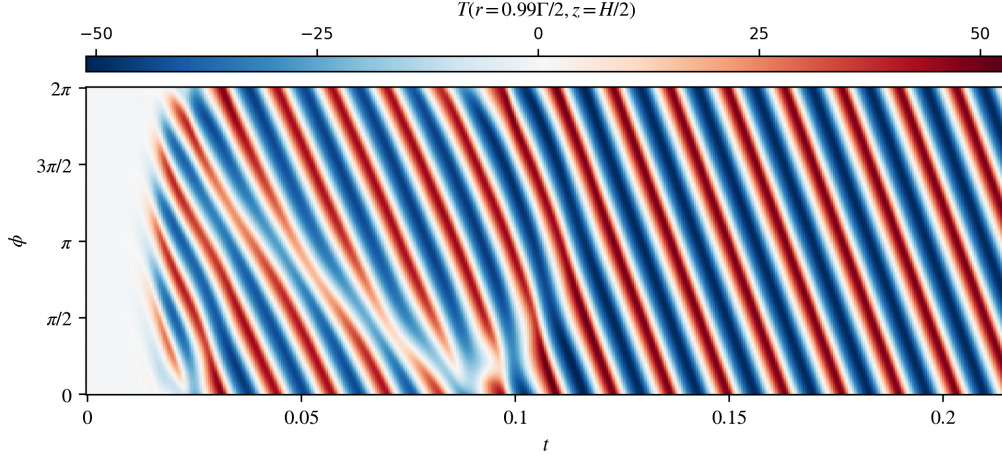


FIGURE 7. Temperature space-time propagation diagram as a function of azimuth,  $\phi$ , and time,  $t$ . The pattern shows the  $R/R_c = 2$ , no-slip case. The simulation starts with low-amplitude noise. The modes  $m = 2, 3, 4, 5, 6$  are all unstable, with  $m = 3, 4$  having the largest growth rates. The pattern starts with approximately three full wavelengths, undergoes a coarsening defect, and settles into a consistent two-wave pattern.

$R/R_c$	BC	$N_r$	$N_\phi$	$N_z$	$\Gamma$	$\sigma$	$\omega/\omega_c$	$Nu - 1$
1.01	NS	32	96	48	4/5		1.01	0.86
1.02	NS	32	96	48	4/5		1.03	1.75
1.05	NS	32	96	48	4/5		1.06	4.42
1.1	NS	32	96	48	4/5		1.12	9.42
1.2	NS	32	96	48	4/5		1.24	21.4
1.5	NS	48	128	64	4/5		1.52	74.9
2	NS	64	128	64	4/5		1.70	239
3	NS	128	256	64	4/5		0.88	722
4	NS	192	384	96	4/5		0.41	1605
5	NS	256	512	128	4/5		0.04	1605
6	NS	192	384	96	4/5		-0.30	1997
2	SF	64	128	64	4/5	1	1.58	178
3	SF	128	256	64	4/5	1	2.22	417
4	SF	192	512	96	4/5	1	3.12	668

TABLE 3. Summary of all simulation parameters. In every case, for  $\Gamma = 4/5$ , the critical scaled Rayleigh number,  $R_c = 28.237851887421087$ , and the critical frequency  $\omega_c = 69.02735982770973$ . By convention,  $\omega > 0$  corresponds to *retrograde* propagation, consistent with the linear instability calculation. For top/bottom boundary conditions, *NS* is no-slip, and *SF* is stress-free. While  $R, \Gamma, \sigma$  are input control parameters, fig. 11 shows the output parameters,  $\omega$  and  $Nu$ . Note that the Prandtl number,  $\sigma$  drops out of the system in the no-slip case.

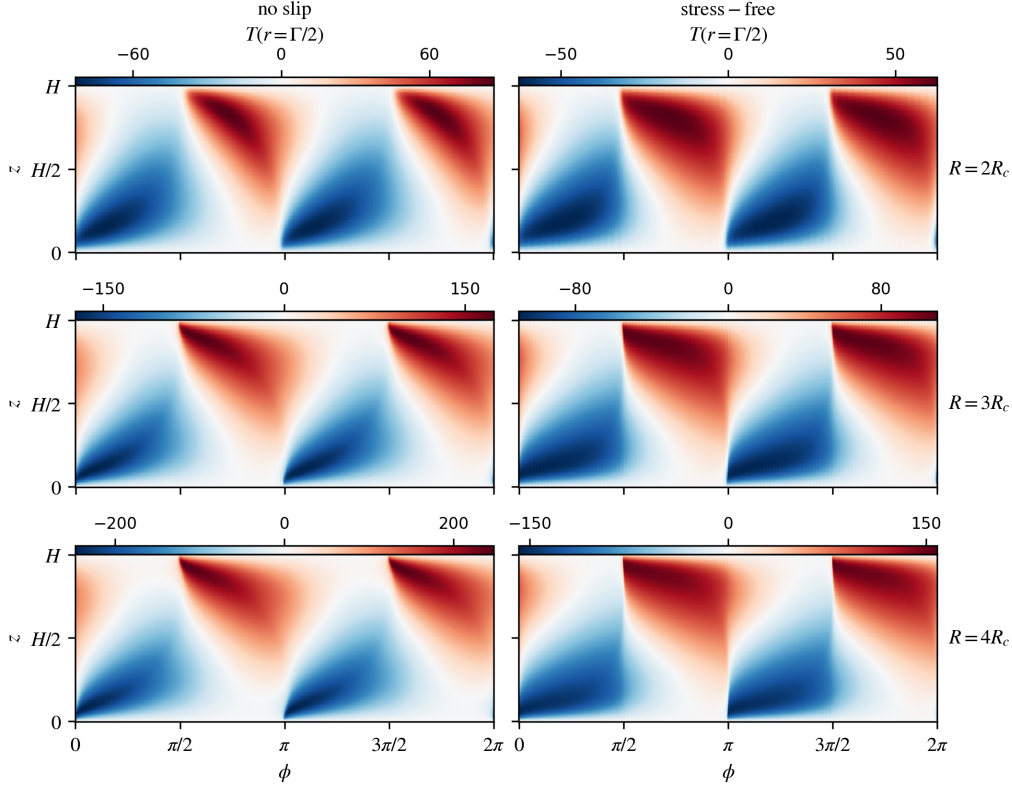


FIGURE 8. Temperature patterns at the sidewall: The left column shows the no-slip case, and the right column shows the stress-free case. The rows show  $R/R_c = 2, 3, 4$  respectively.

Fig. 8 illustrates the sidewall temperature pattern for different boundary conditions and  $R$ . In all cases, alternating hot/cold spots exist near the top/bottom of the domain. These patterns extend toward the mid-plane of the cylinder as  $\phi$  increases past the location of the hot/cold spot. The height of these patterns is smaller for no-slip boundary conditions than for stress-free boundary conditions. As  $R$  increases, the edges of the hot/cold spots sharpen, producing front-like features that require higher and higher azimuthal resolution for increased  $R$ . The stress-free simulations have sharper, more vertically aligned fronts. For this reason, we could only run simulations up to  $R = 4R_c$  for stress-free boundary conditions, while we were able to reach higher values  $R = 6R_c$  in the no-slip simulations.

To show the horizontal structure of the modes, we plot the pressure at the top of the cylinder in fig. 9. The pressure perturbations extend significantly into the cylinder, although the features become increasingly localised to the walls at  $R$  increases. Recall that these visualisations do not directly show the Stewartson layers, which are infinitely thin in this analysis. For stress-free boundary conditions, the pressure fields do not change substantially as  $R$  increases, other than becoming more localised near the boundary. However, there are more interesting differences between different  $R$  for the no-slip boundary conditions. For low  $R$ , the contours of constant pressure slope away from the walls in the counter-clockwise direction, as for the stress-free simulations. However, for higher  $R$ , the no-slip simulations have contours of constant pressure that slope away from the walls in the clockwise direction. This change in morphology may be related to the differences in propagation direction between the no-slip and stress-free simulations at higher  $R$ .

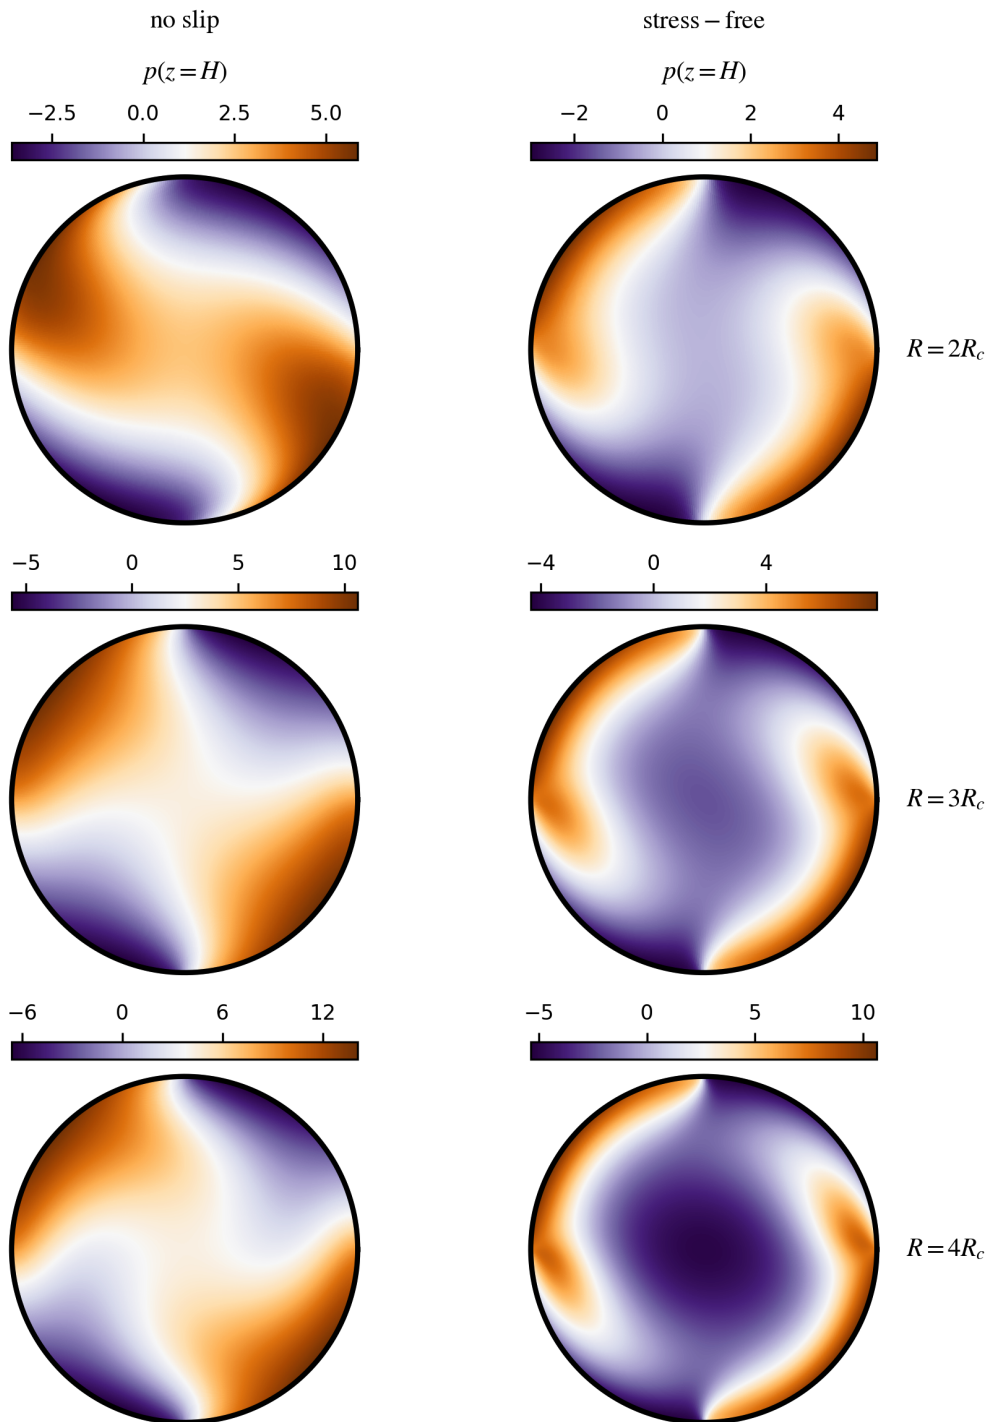


FIGURE 9. Pressure patterns at the top: The left column shows the no-slip case, and the right column shows the stress-free case. The rows show  $R/R_c = 2, 3, 4$  respectively.

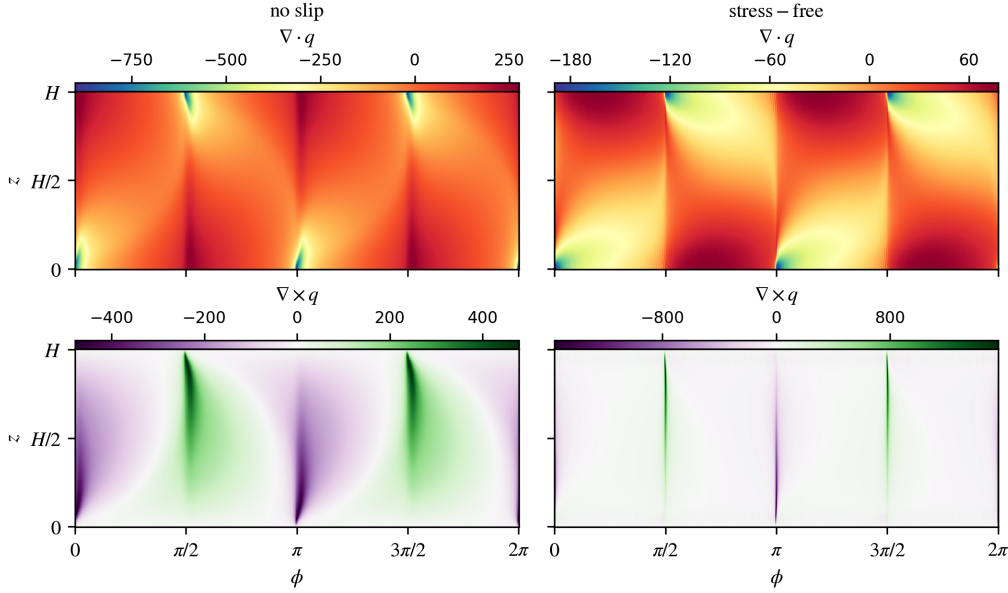


FIGURE 10. Boundary-layer divergence and curl patterns at the sidewall: The left column shows the no-slip case, and the right column shows the stress-free case. Both cases correspond to  $R/R_c = 4$ .

In fig. 10, we visualise the momentum fluxes within the Stewartson layers by plotting  $\nabla \cdot q$  and  $\nabla \times q$ . For the divergence,  $\nabla \cdot q = u_n$ , the normal velocity at the sidewall. For the curl,  $\nabla \times q = \partial_\ell q_z - \partial_z q_\ell$ . The temperature at the sidewalls shows sharper azimuthal features in the stress-free simulations than in the no-slip simulations. In particular,  $\nabla \times q$  is very sharp and vertically aligned in the stress-free simulation. In the no-slip simulation,  $\nabla \cdot q$  and  $\nabla \times q$  are much wider and show the same types of sloped features near the top and bottom of the cylinder as the temperature field.

Next, we focus on heat transport. In the reduced wall-mode equations, the bulk has no vertical velocity. Within the asymptotic approximation, the diffusive heat transport happens entirely in the bulk, while the convective heat transport happens entirely within the Stewartson layer. In polar coordinates,

$$F_c = \frac{1}{|\mathcal{A}|} \int_0^{2\pi} q_z \Theta \, d\phi, \quad F_d = \frac{1}{|\mathcal{A}|} \int_0^{2\pi} \int_0^{\frac{r}{2}} \partial_z T \, r \, dr \, d\phi, \quad (6.11)$$

where  $|\mathcal{A}| = \pi\Gamma^2/4 = 4\pi/25 \approx 0.502$ , and  $\Theta = T - \bar{T}$ . These fluxes sum to the total  $F_d + F_c = F_t = Nu$ .

The left panel of fig. 11 shows  $Nu$  as a function of  $R/R_c$  for both no-slip and stress-free simulations. As  $R \rightarrow R_c$ , the wall modes saturate at lower and lower amplitude, leading to  $Nu \rightarrow 1$ . At higher supercriticality,  $Nu$  becomes quite large, reaching a value of almost 2000 for  $R = 6R_c$  with no-slip boundary conditions. At larger  $R$ , the data are roughly consistent with a  $Nu \approx R^{3/2}$  power-law. However, we do not have enough dynamic range in  $R$  to calculate the exponent accurately or determine if a power-law truly captures the dependence. Furthermore, we lack any theoretical argument for a  $3/2$  exponent.

The right panel of fig. 11 shows the different depth-dependent heat fluxes for the no-slip and stress-free simulations with  $R = 4R_c$ . The convective heat flux is zero at the top and bottom boundaries ( $q_z = 0$ ) but becomes significant and roughly constant away from

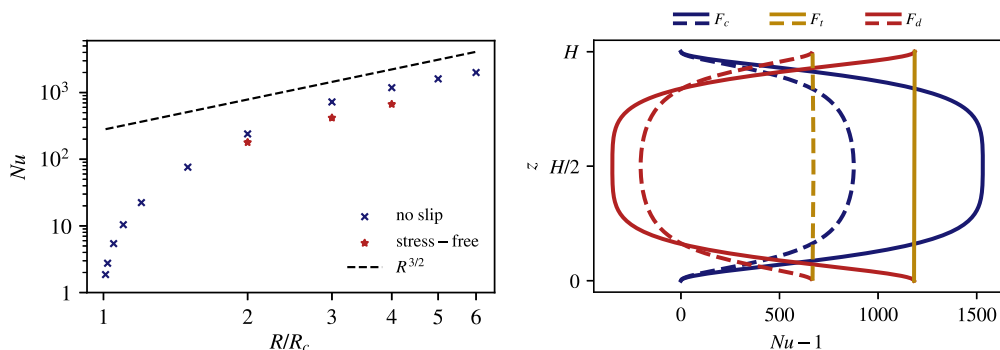


FIGURE 11. Diagrams of heat transport: The left plot shows the Nusselt number,  $Nu$ , versus the supercriticality,  $R/R_c$ ; by definition  $Nu_c = 1$  at onset. The right plot shows the depth-dependent diffusive ( $F_d$ , blue) and convective fluxes ( $F_c$ , red), along with their total ( $F_t = F_d + F_c$ , gold) for simulations with  $R = 4R_c$ . The solid lines correspond to the no-slip case, and the dashed lines correspond to stress-free. The independence of  $F_t$  on depth,  $z$ , implies the systems are in thermal equilibrium with a well-defined  $Nu$ .

the horizontal boundaries. The diffusive heat flux is large and positive in the top and bottom thermal boundary layers but intriguingly becomes negative near the mid-plane. The (vertical) middle of the cylinder becomes stably stratified due to the wall modes. All of our simulations are thermally equilibrated, where the total heat flux is constant with height.

Fig. 7 shows the instability of the wall modes saturates into nonlinear travelling waves. At onset, we calculate the propagation rate via linear theory; for  $\Gamma = 4/5$ ,  $\omega_c \approx 69$  in the retrograde direction. Previous work has shown the propagation rate varies with  $R$  (e.g. Horn & Schmid 2017; Favier & Knobloch 2020). Fig. 12 shows the propagation rate as a function of  $R/R_c$  for no-slip and stress-free simulations. As  $R$  increases from  $R_c$ , the propagation rate  $\omega$  also increases approximately linearly. At  $R = 2R_c$ , the propagation rates are similar for no-slip and stress-free simulations. However, for larger  $R$ , the propagation rate increases monotonically for stress-free simulations, whereas the propagation rate decreases for simulations with no-slip boundary conditions. At  $R \approx 5R_c$ , there is a steady nonlinear solution with no propagation, and for higher  $R$ , the solution propagates in the prograde direction. This switch in propagation direction may relate to the change in the azimuthal structure of the pressure perturbations shown in fig. 9. Horn & Schmid (2017) and Ravichandran & Wettlaufer (2023) both find mixtures of both prograde and retrograde propagation, depending on parameter values. Note that the structure of the temperature perturbations at the boundary (e.g., shown up to  $R = 4R_c$  in fig. 8) does not change significantly as  $R$  increases, other than becoming increasingly sharp.

Finally, fig. 13 shows the mean zonal flow for no-slip and stress-free simulations with  $R = 4R_c$ . At this  $R$ , the modes propagate retrograde in both simulations. However, the mean zonal flow at the boundary is positive in the no-slip simulation, while it is (as expected) negative in the stress-free simulation. The change in propagation direction for simulations with no-slip boundary conditions may be related to the development of a prograde mean zonal flow.

## 7. Discussion and Conclusions

This work derives a balanced set of reduced equations governing the nonlinear development of convective wall-mode instabilities in rapidly rotating systems. Focusing on the



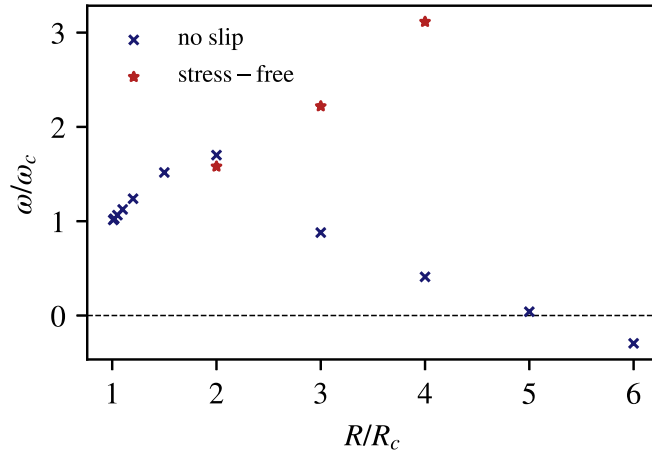


FIGURE 12. The propagation rate,  $\omega/\omega_c$  versus the supercriticality,  $R/R_c$ . The rates increases up to  $R/R_c \approx 2$ . At that point, the stress-free case continues the trend while the no-slip rate declines and eventually becomes prograde beyond  $R/R_c \approx 5$ .

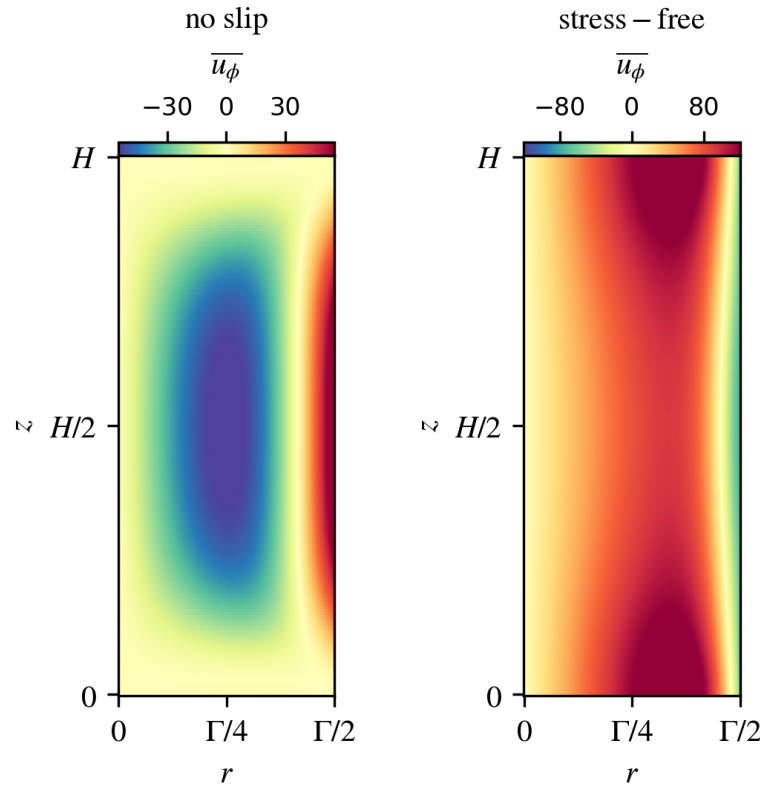


FIGURE 13. Mean zonal flow in meridional planes: The left shows the no-slip case, and the right shows the stress-free case. Both cases correspond to  $R/R_c = 4$ .

essential dynamics within the bulk interior and the Stewartson boundary layers at the sidewalls captures the multiscale nature of wall-mode convection. The dynamics of the bulk interior diagnostically determine the small-scale behaviour within the boundary layers. In contrast, the sidewall layers feedback onto the interior through a nonlinear lateral heat-flux boundary condition, providing a closed and self-consistent system. The final reduced dynamics occupies the bulk interior and comprises geometrically prescribed scales. All boundary layers exist behind the scenes, their presence felt via a series of nontrivial boundary conditions that include nonlinear transport and non-local integral transforms.

The bulk-boundary connection offers a clearer understanding of the interplay between multiscale dynamics, often obscured in full models due to their complexity. Systematically eliminating lower-order effects isolates the dominant physical processes, enhancing explanatory power and providing avenues for investigating wall-mode convection in the strongly nonlinear regime. A key difference between our studies and previous high-resolution wall-mode simulations is that we do not find any evidence for secondary instability of the sharp propagating thermal structures. We do not know if this is because we have not reached high enough supercriticality or because the equations filter baroclinic inertial dynamics. We imagine future work methodically reintroducing dynamic ingredients that model various aspects of vortex separation, which can populate the interior with pseudo-convective structures. The first additional effect worth including is the  $\mathcal{O}(E^{1/6})$  Ekman flux correction in (5.31).

We also reiterate that the final system of equations resembles boundary-forced planetary geostrophic baroclinic dynamics coupled with barotropic quasi-geostrophic vorticity. These connections point to ways systems can include more general effects, such as container topography. We also expect to include centrifugal buoyancy effects in future studies. We have also not considered the effect of a low Prandtl number, which would much more strongly emphasise inertia. Furthermore, these equations can incorporate additional physical effects, as described below.

### 7.1. Double diffusion

Given the simple physical principles involved, we can, in one way, generalise the thermal wall-mode instability almost by inspection. In the case of thermal-solutal buoyancy, we simply add an equation for the “salt” concentration,  $s(t, x, y, z)$ . The updated hydrostatic balance,

$$\theta - s = \partial_z p. \quad (7.1)$$

The relevant linear bulk equation and boundary condition,

$$\partial_t s = Le^{-1} \nabla^2 s, \quad \text{with} \quad -q_z R_S = Le^{-1} \partial_x s|_{x=0}. \quad (7.2)$$

The total set of control parameters includes the solutal scaled Rayleigh number and the Lewis number,

$$R_T = \frac{g \alpha_T \Delta T H}{\kappa}, \quad R_S = -\frac{g \alpha_S \Delta S H}{\kappa}, \quad Le = \frac{\kappa}{\lambda}, \quad (7.3)$$

where  $\lambda$  is the solute diffusivity,  $\alpha_S$  is solutal the expansion coefficient, and  $\Delta S$  is the total imposed concentration jump. As defined,  $R_T > 0$  and  $R_S > 0$  both typically imply destabilising configurations. For a neutral-density background state,  $R_T + R_S = 0$ . In many common situations,  $Le \gg 1$ ; e.g. for salt and water  $Le \approx 10^3$ .

Carrying out a nearly identical analysis to the purely thermal case, the condition for

marginal stability is

$$\frac{R_T}{\sqrt{k^2 + \pi^2 + i\omega}} + \frac{R_S Le}{\sqrt{k^2 + \pi^2 + i\omega Le}} = \frac{\pi(ik + \pi)}{ik}, \quad (7.4)$$

where  $k$  is the  $y$ -direction Fourier wavenumber and  $\omega$  is the complex-valued frequency. In this case, the dispersion relation shows similarities and differences with both the fingering and oscillatory regimes of double-diffusive convection (Garaud 2018). We leave the exploration of the critical  $R_T, R_S$  curve for later work.

## 7.2. Magnetism

Finally, we point out that magnetic wall modes have attracted significant recent attention (Busse 2008; Liu *et al.* 2018; Grannan *et al.* 2022; Xu *et al.* 2023; McCormack *et al.* 2023; Teimurazov *et al.* 2024). There are many ways these dynamics will interact with rapid rotational effects.

In magnetohydrodynamics (MHD), the Chandrasekhar number (Chandrasekhar 1961) measures the influence of an imposed background magnetic field,

$$Q = \frac{B_0^2 H^2}{\mu_0 \rho_0 \nu \eta}, \quad (7.5)$$

where  $B_0$  is the vertical field strength,  $\mu_0$  is the permeability,  $\rho_0$  is the average density, and  $\eta$  is the magnetic diffusivity. In the large- $Q$  limit, several interesting overlaps occur with rapidly rotating parameters that point to extremely rich unexplored dynamics.

In particular, the equivalent MHD sidewall interactions will couple with the rotating version, provided the boundary layers have the same scaling in the same Rayleigh number regime. Indeed, Busse (2008) shows wall-mode convection exists when

$$Ra \sim Q^{3/4}, \quad dx \sim Q^{-1/4}, \quad (7.6)$$

$$Ra \sim Ta^{-1/2}, \quad dx \sim Ta^{-1/6}. \quad (7.7)$$

In both cases, the velocity amplitudes in the boundary layers scale  $v, w \sim dx^{-1}$ . Therefore, when  $Q \sim Ta^{2/3}$ , we expect interesting nontrivial interactions with  $\mathcal{O}(1)$  bulk dynamics coupled to the sidewall via nonlinear and non-local boundary conditions.

However, even more fascinating complications can occur in the ‘‘magnetostrophic’’ regime (Horn & Aurnou 2022). In this case, convection can arise purely in the bulk on  $\mathcal{O}(1)$  length scales without reference to sidewalls. This regime requires a joint balance

$$Ra \sim Q \sim Ta^{1/2}. \quad (7.8)$$

Convection sets in when  $Q^2 \sim 3Ta$  and  $RaTa^{-1/2} \sim 3\sqrt{3}\pi^2 \approx 51.284$ , or  $R/R_c \approx 1.6$  in terms of the wall modes. The implication is that magnetostrophic convection will interact with the sidewall layers with a lower magnetic field strength than purely sidewall-catalysed magnetoconvection. If the wall modes can drive a kinematic dynamo, this is likely the regime the system would end up in.

The authors thank Jon Aurnou, Bob Ecke, Benjamin Favier, Ian Grooms, Susanne Horn, Eric King, Edgar Knobloch, Moritz Linkmann and Matthew McCormack for many helpful and insightful conversations on wall modes and related topics. K.J.B., D.L., J.S.O. and B.P.B. acknowledge support from the NASA HTMS grant 80NSSC20K1280 and the NASA OSTFL grant 80NSSC22K1738.

Declaration of Interests: The authors report no conflict of interest.

## REFERENCES

- AHLERS, G., GROSSMANN, S. & LOHSE, D. 2009 Heat transfer and large scale dynamics in turbulent Rayleigh-Bénard convection. *Reviews of Modern Physics* **81** (2), 503–537.
- ALBAIZ, A.O. & HART, J.E. 1990 An experimental study of Stewartson layer separation. *Geophysical and Astrophysical Fluid Dynamics* **54** (3–4), 127–144.
- AURNOU, J.M., BERTIN, V., GRANNAN, A.M., HORN, S. & VOGT, T. 2018 Rotating thermal convection in liquid gallium: multi-modal flow, absent steady columns. *Journal of Fluid Mechanics* **846**, 846–876.
- BARCILON, V. & PEDLOSKY, J. 1967a Linear theory of rotating stratified fluid motions. *Journal of Fluid Mechanics* **29** (1), 1–16.
- BARCILON, V. & PEDLOSKY, J. 1967b A unified linear theory of homogeneous and stratified rotating fluids. *Journal of Fluid Mechanics* **29** (3), 609–621.
- BENJAMIN, T.B. 1967 Internal waves of permanent form in fluids of great depth. *Journal of Fluid Mechanics* **29** (3), 559–592.
- BOUBNOV, B.M. & GOLITSYN, G.S. 1986 Experimental study of convective structures in rotating fluids. *Journal of Fluid Mechanics* **167** (1), 503.
- BOUBNOV, B.M. & GOLITSYN, G.S. 1990 Temperature and velocity field regimes of convective motions in a rotating plane fluid layer. *Journal of Fluid Mechanics* **219** (1), 215.
- BUELL, J.C. & CATTON, I. 1983 Effect of rotation on the stability of a bounded cylindrical layer of fluid heated from below. *The Physics of Fluids* **26** (4), 892–896.
- BURNS, K.J., FORTUNATO, D., JULIEN, K. & VASIL, G.M. 2022 Corner cases of the tau method: symmetrically imposing boundary conditions on hypercubes.
- BURNS, K.J., VASIL, G.M., OISHI, J.S., LECOANET, D. & BROWN, B.P. 2020 Dedalus: A flexible framework for numerical simulations with spectral methods. *Physical Review Research* **2** (2).
- BUSSE, F.H. 2008 Asymptotic theory of wall-attached convection in a horizontal fluid layer with a vertical magnetic field. *Physics of Fluids* **20** (2).
- CHANDRASEKHAR, S. 1953 The instability of a layer of fluid heated below and subject to Coriolis forces. *Proceedings of the Royal Society of London. Series A. Mathematical and Physical Sciences* **217** (1130), 306–327.
- CHANDRASEKHAR, S. 1961 *Hydrodynamic and Hydromagnetic Stability*. International Series of Monographs on Physics. Oxford.
- CHASSIGNET, E.P., CENEDESE, C. & J., VERRON 2012 *Buoyancy-Driven Flows*. Cambridge University Press.
- CHOI, W., PRASAD, D., CAMASSA, R. & ECKE, R.E. 2004 Traveling waves in rotating Rayleigh-Bénard convection. *Physical Review E* **69** (5).
- CLUNE, T. & KNOBLOCH, E. 1993 Pattern selection in rotating convection with experimental boundary conditions. *Physical Review E* **47** (4), 2536–2550.
- DAWES, J.H.P. 2001 Rapidly rotating thermal convection at low Prandtl number. *Journal of Fluid Mechanics* **428**, 61–80.
- DOERING, C.R., TOPPALADODDI, S. & WETTLAUFER, J.S. 2019 Absence of evidence for the ultimate regime in two-dimensional Rayleigh-Bénard convection. *Physical Review Letters* **123** (25).
- ECKE, R.E. & SHISHKINA, O. 2023 Turbulent rotating Rayleigh-Bénard convection. *Annual Review of Fluid Mechanics* **55** (1), 603–638.
- ECKE, R.E., ZHANG, X. & SHISHKINA, O. 2022 Connecting wall modes and boundary zonal flows in rotating Rayleigh-Bénard convection. *Physical Review Fluids* **7** (1).
- ECKE, R.E., ZHONG, FANG & KNOBLOCH, E 1992 Hopf bifurcation with broken reflection symmetry in rotating Rayleigh-Bénard convection. *Europhysics Letters (EPL)* **19** (3), 177–182.
- FAVIER, B. & KNOBLOCH, E. 2020 Robust wall states in rapidly rotating Rayleigh-Bénard convection. *Journal of Fluid Mechanics* **895**.
- FEIN, J.S. 1978 *Boundary Layers in Homogeneous and Stratified-Rotating Fluids*. Gainesville, Florida: University Presses of Florida.
- GARAUD, P. 2018 Double-diffusive convection at low Prandtl number. *Annual Review of Fluid Mechanics* **50** (1), 275–298.
- GOLDSTEIN, H.F., KNOBLOCH, E., MERCADER, I. & NET, M. 1993 Convection in a rotating

- cylinder. Part 1. Linear theory for moderate Prandtl numbers. *Journal of Fluid Mechanics* **248**, 583–604.
- GOLDSTEIN, H.F., KNOBLOCH, E., MERCADER, I. & NET, M. 1994 Convection in a rotating cylinder. Part 2. Linear theory for low Prandtl numbers. *Journal of Fluid Mechanics* **262**, 293–324.
- GRANNAN, A.M., CHENG, J.S., AGGARWAL, A., HAWKINS, E.K., XU, Y., HORN, S., SÁNCHEZ-ÁLVAREZ, J. & AURNOU, J.M. 2022 Experimental pub crawl from Rayleigh–Bénard to magnetostrophic convection. *Journal of Fluid Mechanics* **939**.
- GREENSPAN, H. 1969 *The Theory of Rotating Fluid*. London: Cambridge.
- GROOMS, I., JULIEN, K. & FOX-KEMPER, B. 2011 On the interactions between planetary geostrophy and mesoscale eddies. *Dynamics of Atmospheres and Oceans* **51** (3), 109–136.
- HART, J.E., KITTELMAN, S. & OHLSEN, D.R. 2002 Mean flow precession and temperature probability density functions in turbulent rotating convection. *Physics of Fluids* **14** (3), 955–962.
- HASHIMOTO, K. 1976 On the stability of the Stewartson layer. *Journal of Fluid Mechanics* **76** (2), 289–306.
- VAN HEIJST, G.J.F. 1983 The shear-layer structure in a rotating fluid near a differentially rotating sidewall. *Journal of Fluid Mechanics* **130** (1), 1.
- HERRMANN, J. & BUSSE, F.H. 1993 Asymptotic theory of wall-attached convection in a rotating fluid layer. *Journal of Fluid Mechanics* **255**, 183–194.
- HESTER, E.W. & VASIL, G.M. 2023 Orthogonal signed-distance coordinates and vector calculus near evolving curves and surfaces. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **479** (2277).
- HORN, S. & AURNOU, J.M. 2022 The Elbert range of magnetostrophic convection. I. Linear theory. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **478** (2264).
- HORN, S. & SCHMID, P.J. 2017 Prograde, retrograde, and oscillatory modes in rotating Rayleigh–Bénard convection. *Journal of Fluid Mechanics* **831**, 182–211.
- HOWARD, L.N. 1963 Heat transport by turbulent convection. *Journal of Fluid Mechanics* **17** (03), 405.
- JULIEN, K., AURNOU, J.M., CALKINS, M.A., KNOBLOCH, E., MARTI, P., STELLMACH, S. & VASIL, G.M. 2016 A nonlinear model for rotationally constrained convection with Ekman pumping. *Journal of Fluid Mechanics* **798**, 50–87.
- JULIEN, K. & KNOBLOCH, E. 2007 Reduced models for fluid flows with strong constraints. *Journal of Mathematical Physics* **48** (6).
- JULIEN, K., KNOBLOCH, E., RUBIO, A.M. & VASIL, G.M. 2012 Heat transport in low-Rossby-number Rayleigh–Bénard convection. *Physical Review Letters* **109** (25).
- JULIEN, K., LEGG, S., MCWILLIAMS, J. & WERNE, J. 1996 Rapidly rotating turbulent Rayleigh–Bénard convection. *Journal of Fluid Mechanics* **322**, 243–273.
- KERSWELL, R.R. & BARENGHI, C.F. 1995 On the viscous decay rates of inertial waves in a rotating circular cylinder. *Journal of Fluid Mechanics* **285**, 203–214.
- KEVORKIAN, J. & COLE, J.D. 1981 *Perturbation Methods in Applied Mathematics. Applied Mathematics Sciences Series*. Springer-Verlag.
- KING, E.M., STELLMACH, S., NOIR, J., HANSEN, U. & AURNOU, J.M. 2009 Boundary layer control of rotating convection systems. *Nature* **457** (7227), 301–304.
- KUNNEN, R.P.J., CLERCX, H.J.H. & VAN HEIJST, G.J.F. 2013 The structure of sidewall boundary layers in confined rotating Rayleigh–Bénard convection. *Journal of Fluid Mechanics* **727**, 509–532.
- KUNNEN, R.P.J., GEURTS, B.J. & CLERCX, H.J.H. 2009 Experimental and numerical investigation of turbulent convection in a rotating cylinder. *Journal of Fluid Mechanics* **642**, 445–476.
- KUNNEN, R.P.J., STEVENS, R.J.A.M., OVERKAMP, J., SUN, C., VAN HEIJST, G.F. & CLERCX, H.J.H. 2011 The role of Stewartson and Ekman layers in turbulent rotating Rayleigh–Bénard convection. *Journal of Fluid Mechanics* **688**, 422–442.
- KUO, E.Y. & CROSS, M.C. 1993 Traveling-wave wall states in rotating Rayleigh–Bénard convection. *Physical Review E* **47** (4), R2245–R2248.

- LI, L., LIAO, X., CHAN, K.H. & ZHANG, K. 2008 Linear and nonlinear instabilities in rotating cylindrical Rayleigh-Bénard convection. *Physical Review E* **78** (5).
- LIAO, X., ZHANG, K. & CHANG, Y. 2006 On boundary-layer convection in a rotating fluid layer. *Journal of Fluid Mechanics* **549** (1), 375.
- LIU, W., KRASNOV, D. & SCHUMACHER, J. 2018 Wall modes in magnetoconvection at high hartmann numbers. *Journal of Fluid Mechanics* **849**.
- LIU, Y. & ECKE, R.E. 1997 Eckhaus-Benjamin-Feir instability in rotating convection. *Physical Review Letters* **78** (23), 4391–4394.
- LIU, Y. & ECKE, R.E. 2011 Local temperature measurements in turbulent rotating Rayleigh-Bénard convection. *Physical Review E* **84** (1).
- LOHSE, D. & SHISHKINA, O. 2024 Ultimate Rayleigh-Bénard turbulence. *Reviews of Modern Physics* **96** (3).
- LOPEZ, J.M., MARQUES, F., MERCADER, I. & BATISTE, O. 2007 Onset of convection in a moderate aspect-ratio rotating cylinder: Eckhaus-Benjamin-Feir instability. *Journal of Fluid Mechanics* **590**, 187–208.
- MARQUES, F. & LOPEZ, J.M. 2008 Influence of wall modes on the onset of bulk convection in a rotating cylinder. *Physics of Fluids* **20** (2).
- MCCORMACK, M., TEIMURAZOV, A., SHISHKINA, O. & LINKMANN, M. 2023 Wall mode dynamics and transition to chaos in magnetoconvection with a vertical magnetic field. *Journal of Fluid Mechanics* **975**.
- NAKAGAWA, Y. & FRENZEN, P. 1955 A theoretical and experimental study of cellular convection in rotating fluids. *Tellus* **7** (1), 1–21.
- NIEMELA, J.J., BABUIN, S. & SREENIVASAN, K.R. 2010 Turbulent rotating convection at high Rayleigh and Taylor numbers. *Journal of Fluid Mechanics* **649**, 509–522.
- NIILER, P.P. & BISSHOPP, F.E. 1965 On the influence of Coriolis force on onset of thermal convection. *Journal of Fluid Mechanics* **22** (04), 753.
- NING, L. & ECKE, R.E. 1993 Rotating Rayleigh-Bénard convection: Aspect-ratio dependence of the initial bifurcations. *Physical Review E* **47** (5), 3326–3333.
- ONO, H. 1975 Algebraic solitary waves in stratified fluids. *Journal of the Physical Society of Japan* **39** (4), 1082–1091.
- PEDLOSKY, J. 1987 *Geophysical Fluid Dynamics*, 2nd edn. New York: Springer-Verlag.
- PEDLOSKY, J. 2009 The response of a weakly stratified layer to buoyancy forcing. *Journal of Physical Oceanography* **39** (4), 1060–1068.
- PLAUT, E. 2003 Nonlinear dynamics of traveling waves in rotating Rayleigh-Bénard convection: Effects of the boundary conditions and of the topology. *Physical Review E* **67** (4).
- RAVICHANDRAN, S. & WETTTLAUER, J.S. 2023 Prograde and meandering wall modes in rotating Rayleigh-Bénard convection with conducting walls.
- ROSSBY, H.T. 1969 A study of Bénard convection with and without rotation. *Journal of Fluid Mechanics* **36** (2), 309–335.
- RUBIO, A., LOPEZ, J.M. & MARQUES, F. 2009 Interacting oscillatory boundary layers and wall modes in modulated rotating convection. *Journal of Fluid Mechanics* **625**, 75–96.
- SAKAI, S. 1997 The horizontal scale of rotating convection in the geostrophic regime. *Journal of Fluid Mechanics* **333**, 85–95.
- SCHEEL, J.D., PAUL, M.R., CROSS, M.C. & FISCHER, P.F. 2003 Traveling waves in rotating Rayleigh-Bénard convection: Analysis of modes and mean flow. *Physical Review E* **68** (6).
- SCHONBEK, M. & VALLIS, G.K. 1999 Energy decay of solutions to the Boussinesq, primitive, and planetary geostrophic equations. *Journal of Mathematical Analysis and Applications* **234** (2), 457–481.
- SCHUMACHER, J. & SREENIVASAN, K.R. 2020 Colloquium: Unusual dynamics of convection in the sun. *Reviews of Modern Physics* **92** (4).
- SPIEGEL, E.A. & VERONIS, G. 1960 On the Boussinesq approximation for a compressible fluid. *The Astrophysical Journal* **131**, 442.
- SPRAGUE, M., JULIEN, K., KNOBLOCH, E. & WERNE, J. 2006 Numerical simulation of an asymptotically reduced system for rotationally constrained convection. *Journal of Fluid Mechanics* **551** (1), 141.
- STELLMACH, S., LISCHPER, M., JULIEN, K., VASIL, G.M., CHENG, J.S., RIBEIRO, A., KING,

- E.M. & AURNOU, J.M. 2014 Approaching the asymptotic regime of rapidly rotating convection: Boundary layers versus interior dynamics. *Physical Review Letters* **113** (25).
- STEVENS, R.J.A.M., OVERKAMP, J., LOHSE, D. & CLERCX, H.J.H. 2011 Effect of aspect ratio on vortex distribution and heat transfer in rotating Rayleigh-Bénard convection. *Physical Review E* **84** (5).
- STEWARTSON, K. 1957 On almost rigid rotations. *Journal of Fluid Mechanics* **3** (1), 17–26.
- TEIMURAZOV, A., MCCORMACK, M., LINKMANN, M. & SHISHKINA, O. 2024 Unifying heat transport model for the transition between buoyancy-dominated and lorentz-force-dominated regimes in quasistatic magnetoconvection. *Journal of Fluid Mechanics* **980**.
- TERRIEN, L., FAVIER, B. & KNOBLOCH, E. 2023 Suppression of wall modes in rapidly rotating Rayleigh-Bénard convection by narrow horizontal fins. *Physical Review Letters* **130** (17).
- VALLIS, GEOFFREY K. 2017 *Atmospheric and Oceanic Fluid Dynamics: Fundamentals and Large-Scale Circulation*. Cambridge University Press.
- VASIL, G.M., BRUMMELL, N.H. & JULIEN, K. 2008a A new method for fast transforms in parity-mixed PDEs: Part I. Numerical techniques and analysis. *Journal of Computational Physics* **227** (17), 7999–8016.
- VASIL, G.M., BRUMMELL, N.H. & JULIEN, K. 2008b A new method for fast transforms in parity-mixed PDEs: Part II. Application to confined rotating convection. *Journal of Computational Physics* **227** (17), 8017–8034.
- VASIL, G.M., BURNS, K.J., LECOANET, D., OLVER, S., BROWN, B.P. & OISHI, J.S. 2016 Tensor calculus in polar coordinates using Jacobi polynomials. *Journal of Computational Physics* **325**, 53–73.
- VASIL, G.M., JULIEN, K. & FEATHERSTONE, N.A. 2021 Rotation suppresses giant-scale solar convection. *Proceedings of the National Academy of Sciences* **118** (31).
- VERONIS, G. 1968 Large-amplitude Bénard convection in a rotating fluid. *Journal of Fluid Mechanics* **31** (1), 113–139.
- WANG, D & RUUTH, S J 2008 Variable step-size implicit-explicit linear multistep methods for time-dependent partial differential equations. *Journal of Computational Mathematics* .
- WEDI, M, MOTURI, V.M., FUNFSCHILING, D. & WEISS, S. 2022 Experimental evidence for the boundary zonal flow in rotating Rayleigh-Bénard convection. *Journal of Fluid Mechanics* **939**.
- WEISS, S. & AHLERS, G. 2011 Heat transport by turbulent rotating Rayleigh-Bénard convection and its dependence on the aspect ratio. *Journal of Fluid Mechanics* **684**, 407–426.
- DE WIT, X.M., AGUIRRE GUZMÁN, A.J., MADONIA, M., CHENG, J.S., CLERCX, H.J.H. & KUNNEN, R.P.J. 2020 Turbulent rotating convection confined in a slender cylinder: The sidewall circulation. *Physical Review Fluids* **5** (2).
- DE WIT, X.M., BOOT, W.J.M., MADONIA, M., AGUIRRE GUZMÁN, A.J. & KUNNEN, R.P.J. 2023 Robust wall modes and their interplay with bulk turbulence in confined rotating Rayleigh-Bénard convection. *Physical Review Fluids* **8** (7).
- XU, Y., HORN, S. & AURNOU, J.M. 2023 Transition from wall modes to multimodality in liquid gallium magnetoconvection. *Physical Review Fluids* **8** (10).
- ZHAN, X., LIAO, X., ZHU, R. & ZHANG, K. 2009 Convection in rotating annular channels heated from below. Part 3: Experimental boundary conditions. *Geophysical and Astrophysical Fluid Dynamics* **103**, 443–466.
- ZHANG, K. & LIAO, X. 2009 The onset of convection in rotating circular cylinders with experimental boundary conditions. *Journal of Fluid Mechanics* **622**, 63–73.
- ZHANG, K., LIAO, X. & BUSSE, F.H. 2007 Asymptotic theory of inertial convection in a rotating cylinder. *Journal of Fluid Mechanics* **575**, 449–471.
- ZHANG, K. & ROBERTS, P.H. 1998 A note on stabilising and destabilising effects of Ekman boundary layers. *Geophysical and Astrophysical Fluid Dynamics* **88**, 215–223.
- ZHANG, X., ECKE, R.E. & SHISHKINA, O. 2021 Boundary zonal flows in rapidly rotating turbulent thermal convection. *Journal of Fluid Mechanics* **915**.
- ZHANG, X., REITER, P., SHISHKINA, O. & ECKE, R.E. 2024 Wall modes and the transition to bulk convection in rotating Rayleigh-Bénard convection. *Physical Review Fluids* **9** (5).
- ZHONG, F., ECKE, R.E. & STEINBERG, V. 1991 Asymmetric modes and the transition to vortex structures in rotating Rayleigh-Bénard convection. *Physical Review Letters* **67**, 2473–2476.

- ZHONG, F., ECKE, R.E. & STEINBERG, V. 1993 Rotating Rayleigh-Bénard convection: Asymmetri modes and vortex states. *Journal of Fluid Mechanics* **249**, 135–159.
- ZHONG, J.-Q. & AHLERS, G. 2010 Heat transport and the large-scale circulation in rotating turbulent Rayleigh-Bénard convection. *Journal of Fluid Mechanics* **665**, 300–333.