



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


Advanced Micro Devices

Pogo Linux PerformanceWare 3566, AMD Opteron (TM) 865

SPECfp_rate2000 = 60.2

SPECfp_rate_base2000 = 55.9

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Apr-2005 | Hardware Avail: May-2005 | Software Avail: May-2005

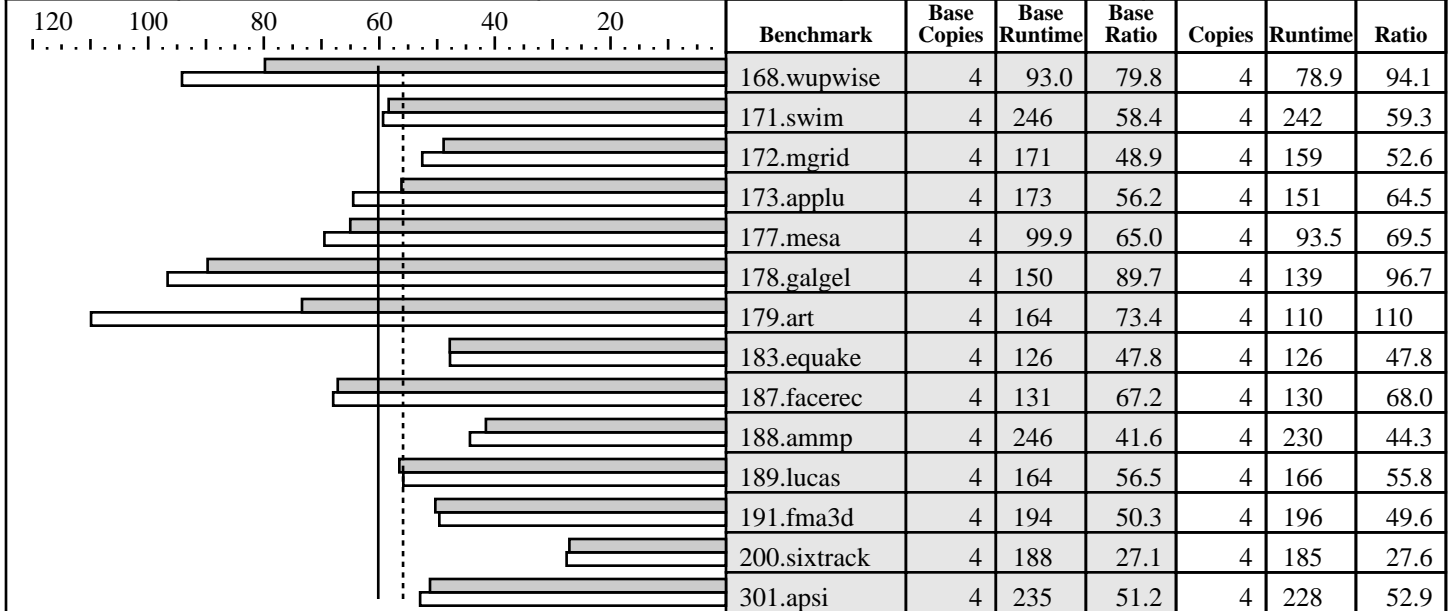

Hardware

CPU: AMD Opteron (TM) 865
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1-4
 Parallel: No
 Primary Cache: 64KBI + 64KBD/core
 Secondary Cache: 1024KB (I+D)/core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 8x1024 MB PC3200 CL3.0 ECC Reg
 Disk Subsystem: SCSI, Seagate Cheetah Ultra320
 ST373307LC, 10000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 9 for AMD64
 SP1, kernel-smp-2.6.5-7.151.x86_64.rpm
 Compiler: PathScale EKOPath Compiler Suite, Release 2.0
 File System: Linux/ext3
 System State: Multi-user, run level 3

Notes/Tuning Information

Tested by Advanced Micro Devices

+FDO: PASS1= -fb_create fbdata PASS2= -fb_opt fbdata
 +ACML means linking with AMD Core Math Library V2.5.1

Baseline optimization

C programs: -Ofast -WOPT:mem_opnds=on +FDO
 Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex +FDO
 Portability Flags:
 178.galgel: -fixedform

Peak Tuning:

168.wupwise: -Ofast -LNO:prefetch_ahead=5:prefetch=3
 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3 -TENV:X=4
 -IPA:space=1000:linear=on:plimit=50000:callee_limit=5000
 -INLINE:aggressive=on



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Pogo Linux PerformanceWare 3566, AMD Opteron (TM) 865

SPECfp_rate2000 = 60.2

SPECfp_rate_base2000 = 55.9

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Apr-2005 | Hardware Avail: May-2005 | Software Avail: May-2005

Notes/Tuning Information (Continued)

```

171.swim: -Ofast -LNO:fusion=2 -m3dnow
172.mgrid: -O3 -LNO:fusion=2:blocking=off
          -OPT:Ofast:unroll_times_max=8:unroll_size=256:ro=3
          -CG:gcm=off:cflow=off -m3dnow
173.applu: -Ofast -CG:local_fwd_sched=on
          -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3
          -OPT:ro=3 -TENV:X=3 -WOPT:val=2
177.mesa: -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on +FDO
178.galgel: -Ofast -OPT:fast_complex -CG:use_movlpd=on RM_SOURCES=lapak.f90 +ACML
179.art: -O3 -OPT:ro=2:div_split=on:alias=typed -fno-math-errno -m32
183.equake: -Ofast -WOPT:mem_opnds=on -CG:local_fwd_sched=on
187.facerec: -Ofast -OPT:treeheight=on:IEEE_NaN_Inf=off:ro=3 -CG:load_exe=0
          -LNO:fusion=2 -IPA:plimit=1500 +FDO
188.ammp: -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
          -fno-math-errno -TENV:X=4 +FDO
189.lucas: -Ofast -CG:local_fwd_sched=on -LNO:fusion=2
          +FDO
191.fma3d: -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
          -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack:= -O3 -OPT:Ofast:Olimit=6000 -fno-math-errno -CG:load_exe=1 +FDO
301.apsi: -Ofast -TENV:X=4 -LNO:fusion=2:prefetch=0

```

Bios Rev 2.33.1.1

All memory slots populated on all CPU(s).

Taskset utility used to bind CPU(s) to processes.