



# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


## IBM Corporation

AMD Opteron LS20 for IBM eServer Blade Center (AMD Opteron (TM) 250)

SPECint\_rate2000 = 36.6

SPECint\_rate\_base2000 = 32.8

SPEC license #: 11 | Tested by: IBM, Inc. | Test date: Apr-2005 | Hardware Avail: Apr-2005 | Software Avail: Apr-2005

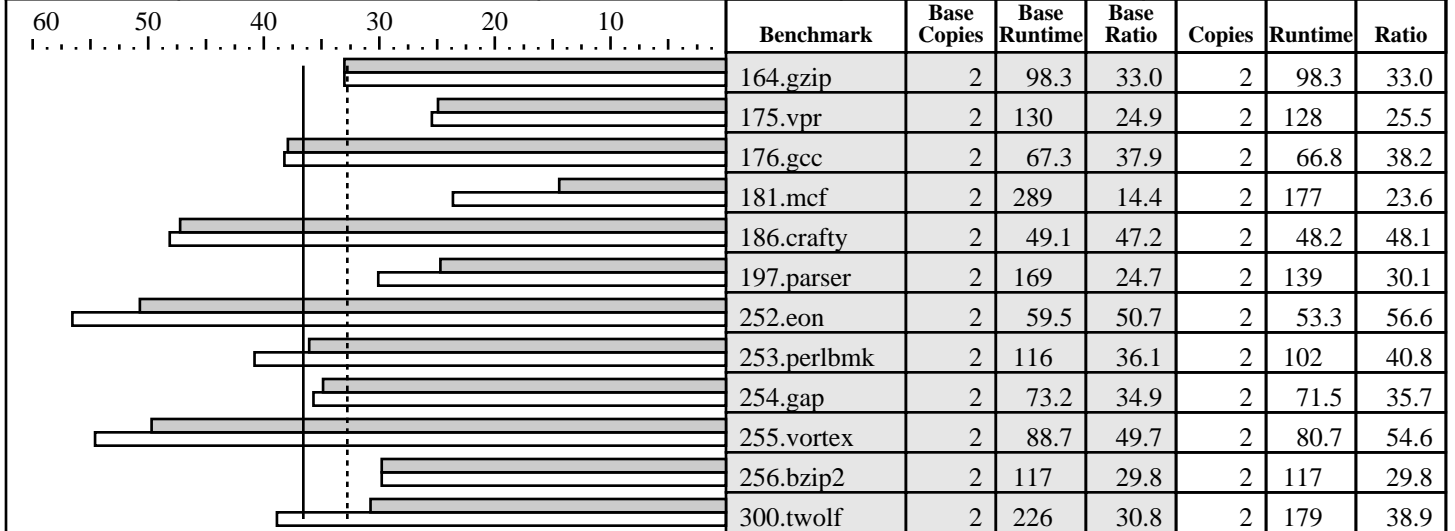

### Hardware

CPU: AMD Opteron 250  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 2 chips, 1 core/chip  
 CPU(s) orderable: 1,2  
 Parallel: No  
 Primary Cache: 64KBI + 64KBD on chip  
 Secondary Cache: 1024KB (I+D) on chip  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 4 x 2048MB, DDR400  
 Disk Subsystem: SCSI, 36GB 10K RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux 9.0 SLES 64 bit Kernel 2.6.5-7.151-smp (SP1)  
 Compiler: PathScale EKOPath(TM) Compiler Suite, Release 2.1  
 File System: Linux/reiserfs  
 System State: Multi-user, run level 3

## Notes/Tuning Information

Tested by IBM, Inc.

+FDO: PASS1= -fb\_create fbdata PASS2= -fb\_opt fbdata

### Baseline optimization flags:

C programs: -Ofast +FDO  
 C++ programs: -Ofast +FDO

### Portability Flags:

176.gcc: srcalt 64bitgcc  
 186.crafty: -DLINUX\_i386  
 252.eon: -DHAS\_ERRLIST -DSPEC\_CPU2000\_LP64 srcalt fmax\_errno  
 253.perlbnk: -DSPEC\_CPU2000\_LINUX\_I386 -DSPEC\_CPU2000\_NEED\_BOOL  
               -DSPEC\_CPU2000\_GLIBC22 -DSPEC\_CPU2000\_LP64  
 254.gap: -DSYS\_IS\_USG -DSYS\_HAS\_IOCTL\_PROTO -DSYS\_HAS\_TIME\_PROTO  
           -DSYS\_HAS\_SIGNAL\_PROTO -DSYS\_HAS\_ANSI -DSYS\_HAS\_CALLOC\_PROTO  
           -DSPEC\_CPU2000\_LP64  
 255.vortex: -DSPEC\_CPU2000\_LP64 srcalt closed\_files

Peak Tuning:



# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

AMD Opteron LS20 for IBM eServer Blade Center (AMD Opteron (TM) 250)

SPECint\_rate2000 = 36.6

SPECint\_rate\_base2000 = 32.8

SPEC license #: 11 | Tested by: IBM, Inc. | Test date: Apr-2005 | Hardware Avail: Apr-2005 | Software Avail: Apr-2005

## Notes/Tuning Information (Continued)

```
164.gzip: basepeak = true
175.vpr: -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000
        -INLINE:aggressive=on -IPA:plimit=10000:callee_limit=5000
        +FDO
176.gcc: -O3 -ipa -OPT:goto=off +FDO
181.mcf: -O3 -ipa -IPA:field_reorder=on -m32 +FDO
186.crafty: -O3 -OPT:goto=off +FDO
197.parser: -O3 -ipa -m32 -IPA:ctype=on +FDO
252.eon: -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
        -TENV:X=4:frame_pointer=off -fno-exceptions
        -LNO:fu=10:full_unroll_outer=on -IPA:plimit=4000 +FDO
253.perlbnk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
        -fno-math-errno -IPA:plimit=10000 +FDO
254.gap: -Ofast -WOPT:aggstr=off +FDO
255.vortex: -Ofast -OPT:goto=off -IPA:plimit=1800 -CG:p2align=on
        +FDO
256.bzip2: basepeak = true
300.twolf: -O2 -CG:gcm=off:p2align_freq=100000
        -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
        -WOPT:mem_opnds=on -m32 +FDO
```