




CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V40z

SPECfp_rate2000 = 100
SPECfp_rate_base2000 = 91.4

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Mar-2006 | Hardware Avail: May-2006 | Software Avail: Nov-2005

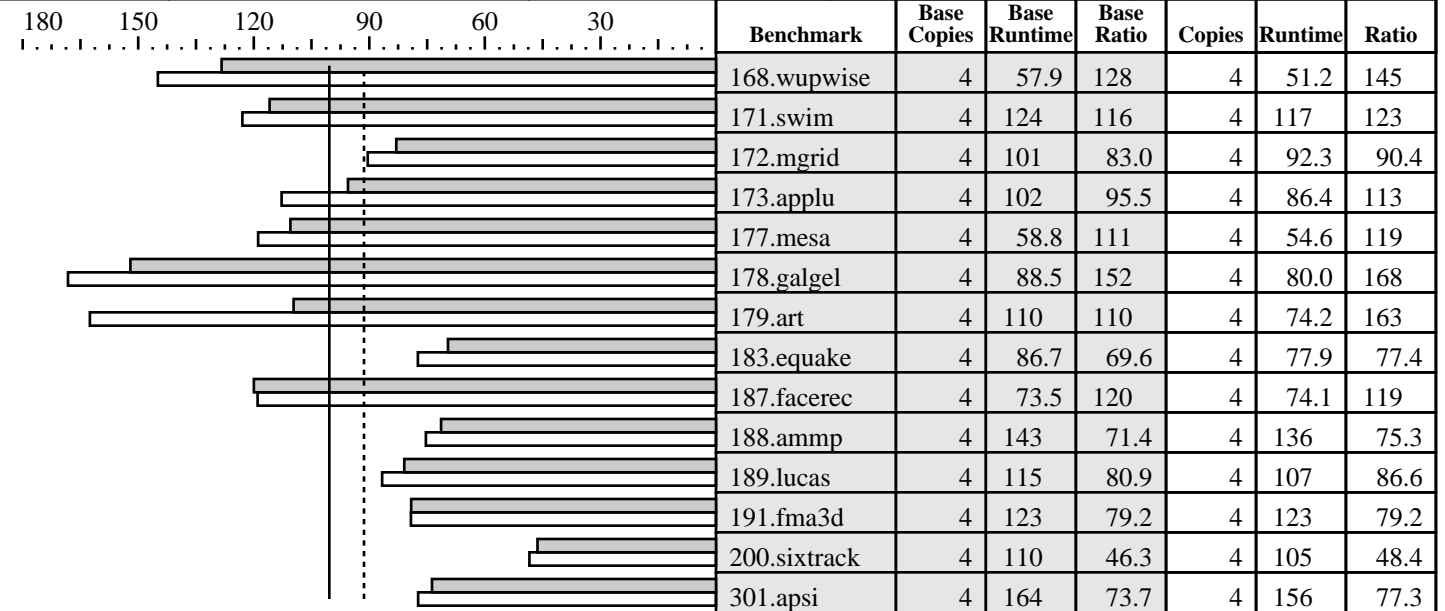

Hardware

CPU: AMD Opteron (TM) 856
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 4 chips, 1 core/chip
 CPU(s) orderable: 2,4 (order by # of chips)
 Parallel: No
 Primary Cache: 64KBI + 64KBD (on chip) per core
 Secondary Cache: 1024KB (I+D) (on chip) per core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 16GB (8x2GB, PC3200 CL3 DDR ECC Registered SDRAM)
 Disk Subsystem: 2x72GB,SCSI,10K RPM
 Other Hardware: None

Software

Operating System: SUSE LINUX Enterprise Server 9 SP3 (x86_64)
 Compiler: PathScale EKOPath(TM) Compiler Suite, Version 2.3
 AMD Core Mathematical Library (ACML), Version 2.7.0
 File System: Linux/ext3
 System State: Multi-user, run level 3

Notes/Tuning Information

GENERAL:

+FDO: PASS1= -fb_create fbdata PASS2= -fb_opt fbdata
 +ACML means -L<acml2.7.0-install-dir>/pathscale64/lib -lacml,
 which causes linking with AMD Core Math Library V2.7.0

Baseline optimization

C programs: -Ofast -WOPT:mem_opnds=on +FDO
 Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
 Portability Flags:
 178.galgel: -fixedform

Peak Tuning:

168.wupwise: -Ofast -LNO:prefetch Ahead=5:prefetch=3
 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
 -IPA:linear=on:plimit=50000:callee_limit=5000
 -INLINE:aggressive=on
 171.swim: -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V40z

SPECfp_rate2000 = 100

SPECfp_rate_base2000 = 91.4

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Mar-2006 | Hardware Avail: May-2006 | Software Avail: Nov-2005

Notes/Tuning Information (Continued)

```

172.mgrid: -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
           -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
           -WOPT:mem_opnds=on:aggstr=0
173.applu: -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
           -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
177.mesa: -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel: -Ofast -OPT:fast_complex=on +ACML +FDO
           RM_SOURCES=lapak.f90
179.art: -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.quake: -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec: -Ofast -LNO:fusion=2
           -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
188.ammp: -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
           -fno-math-errno -TENV:X=4 +FDO
189.lucas: -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d: -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
           -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
           -fno-math-errno -CG:load_exe=1 +FDO
301.apsi: -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2

```

taskset utility used to bind CPU(s) to processes.

Default BIOS setting was used

Half memory slots populated on all CPU(s) in dual-channel configuration.