



SPEC® CPU2017 Floating Point Rate Result


Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65
SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

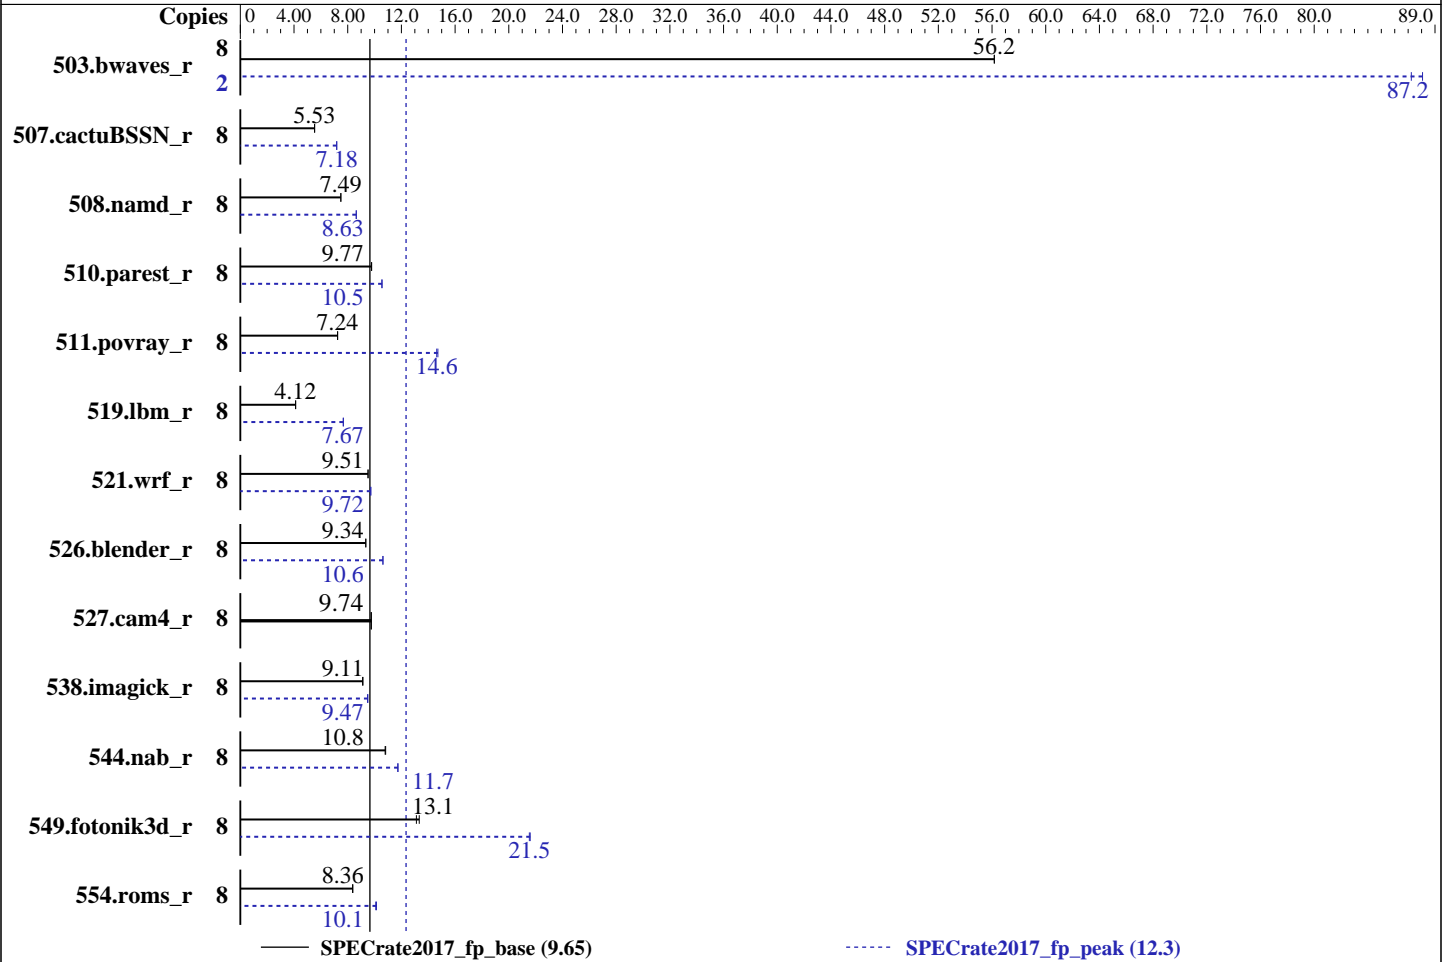

Hardware

CPU Name: SPARC64 XII
 Max MHz.: 4350
 Nominal: 4250
 Enabled: 1 core, 1 chip, 8 threads/core
 Orderable: 1 to 16 BBs; each BB contains 1 or 2 CPU chips;
 2, 3, 4, ... 384 cores
 Cache L1: 64 KB I + 64 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 32 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
 Storage: 1 x 600 GB 10K RPM SAS (for system disk)
 Other: None

Software

OS: Oracle Solaris 11.3 SRU 24.4
 Compiler: C/C++/Fortran: Version 12.6 of Oracle Developer Studio
 Parallel: No
 Firmware: Fujitsu HCP Version 3040 released Oct-2017
 File System: tmpfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	1428	56.2	<u>1428</u>	<u>56.2</u>			2	<u>230</u>	<u>87.2</u>	228	88.1		
507.cactuBSSN_r	8	1829	5.54	<u>1831</u>	<u>5.53</u>			8	<u>1411</u>	<u>7.18</u>	1410	7.18		
508.namd_r	8	<u>1015</u>	<u>7.49</u>	1015	7.49			8	<u>880</u>	<u>8.63</u>	880	8.64		
510.parest_r	8	2139	9.78	<u>2142</u>	<u>9.77</u>			8	<u>1986</u>	<u>10.5</u>	1981	10.6		
511.povray_r	8	<u>2579</u>	<u>7.24</u>	2577	7.25			8	<u>1277</u>	<u>14.6</u>	1269	14.7		
519.lbm_r	8	2047	4.12	<u>2047</u>	<u>4.12</u>			8	<u>1099</u>	<u>7.67</u>	1099	7.67		
521.wrf_r	8	1882	9.52	<u>1884</u>	<u>9.51</u>			8	1844	9.72	<u>1844</u>	<u>9.72</u>		
526.blender_r	8	1303	9.35	<u>1304</u>	<u>9.34</u>			8	1146	10.6	<u>1147</u>	<u>10.6</u>		
527.cam4_r	8	<u>1436</u>	<u>9.74</u>	1433	9.76			8	<u>1436</u>	<u>9.74</u>	1433	9.76		
538.imagick_r	8	<u>2185</u>	<u>9.11</u>	2177	9.14			8	<u>2100</u>	<u>9.47</u>	2093	9.51		
544.nab_r	8	1244	10.8	<u>1248</u>	<u>10.8</u>			8	1146	11.8	<u>1148</u>	<u>11.7</u>		
549.fotonik3d_r	8	<u>2377</u>	<u>13.1</u>	2339	13.3			8	1444	21.6	<u>1448</u>	<u>21.5</u>		
554.roms_r	8	1516	8.39	<u>1521</u>	<u>8.36</u>			8	1253	10.1	<u>1260</u>	<u>10.1</u>		

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:

(/etc/system parameters)

autoup = 86400

Causes pages older than the listed number of seconds to be written by fsflush.

doiflush = 0

Controls whether file system metadata syncs will be executed during fsflush invocations.

dopageflush = 0

Controls whether memory is examined for modified pages during fsflush invocations.

zfs:zfs_arc_max=1073741824

Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

General Notes

The Building Block (BB) is just a Fujitsu SPARC M12-2S that is the basic unit to be expanded as if stacking up children's blocks.

File System:

tmpfs: output_root was used to put run directories in /tmp/cpu2017
zfs: operating system

Binaries were compiled on a system with 2x SPARC64 XII CPU + 1TB Memory using Oracle Solaris 11.3 SRU 24.4

Platform Notes

Firmware Settings:

(XSCF operations)

Set High Speed Mode via XSCF command "sethsmode -s on".

Sysinfo program /export/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on H2S-202-D0 Tue Nov 28 10:14:30 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo

SPARC64-XII (chipid 0, clock 4250 MHz)
1 chips
8 threads
4250 MHz

From kstat: 1 cores

From prtconf: 521728 Megabytes

/etc/release:

Oracle Solaris 11.3 SPARC

uname -a:

SunOS H2S-202-D0 5.11 11.3 sun4v sparc sun4v

disk: df -h /export/cpu2017

Filesystem	Size	Used	Available	Capacity	Mounted on
rpool/export	547G	8.0G	75G	10%	/export

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Compiler Version Notes

=====
CXXC 508.namd_r(base) 510.parest_r(base)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

=====
CC 511.povray_r(base) 526.blender_r(base)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

=====
CC 511.povray_r(peak) 526.blender_r(peak)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

=====
FC 507.cactuBSSN_r(base)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

=====
FC 507.cactuBSSN_r(peak)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Compiler Version Notes (Continued)

=====
CC 519.lbm_r(peak) 538.imagick_r(peak) 544.nab_r(peak)
=====

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30
=====

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30
=====

=====
FC 503.bwaves_r(peak) 549.fotonik3d_r(peak) 554.roms_r(peak)
=====

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30
=====

=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30
=====

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
=====

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30
=====

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
f90 cc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

CC cc

Benchmarks using Fortran, C, and C++:

CC cc f90

Base Portability Flags

503.bwaves_r: -D_FILE_OFFSET_BITS=64
507.cactuBSSN_r: -DSPEC_NO_C99_MATH_IN_CXX -D_FILE_OFFSET_BITS=64
508.namd_r: -D_FILE_OFFSET_BITS=64
510.parest_r: -D_FILE_OFFSET_BITS=64
511.povray_r: -D_FILE_OFFSET_BITS=64
519.lbm_r: -D_FILE_OFFSET_BITS=64
521.wrf_r: -D_FILE_OFFSET_BITS=64
526.blender_r: -DSPEC_NO_ISFINITE -xchar=u -D_FILE_OFFSET_BITS=64
527.cam4_r: -D_FILE_OFFSET_BITS=64
538.imagick_r: -D_FILE_OFFSET_BITS=64
544.nab_r: -D_FILE_OFFSET_BITS=64
549.fotonik3d_r: -D_FILE_OFFSET_BITS=64
554.roms_r: -D_FILE_OFFSET_BITS=64

Base Optimization Flags

C benchmarks:

-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std

C++ benchmarks:

-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=compatible -std=c++03
-lfast

Fortran benchmarks:

-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput

Benchmarks using both Fortran and C:

-m32 -fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-m32 -fast(CC) -fast(cc) -xtarget=sparc64xii -xipo=2 -xpagesize=4M  
-xsegment_align=4M -xthroughput -xalias_level=std  
-xalias_level=compatible -std=c++03 -lfast
```

Benchmarks using Fortran, C, and C++:

```
-m32 -fast(CC) -fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2  
-xpagesize=4M -xsegment_align=4M -xthroughput -xalias_level=std  
-xalias_level=compatible -std=c++03 -lfast
```

Base Other Flags

C benchmarks:

```
-xjobs=8
```

C++ benchmarks:

```
-xjobs=8
```

Fortran benchmarks:

```
-xjobs=8
```

Benchmarks using both Fortran and C:

```
-xjobs=8
```

Benchmarks using both C and C++:

```
-xjobs=8
```

Benchmarks using Fortran, C, and C++:

```
-xjobs=8
```

Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Fortran benchmarks:

```
f90
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

f90 cc

Benchmarks using both C and C++:

CC cc

Benchmarks using Fortran, C, and C++:

CC cc f90

Peak Portability Flags

```
503.bwaves_r: -D_FILE_OFFSET_BITS=64
507.cactuBSSN_r: -DSPEC_NO_C99_MATH_IN_CXX -DSPEC_LP64
508.namd_r: -D_FILE_OFFSET_BITS=64
510.parest_r: -D_FILE_OFFSET_BITS=64
511.povray_r: -D_FILE_OFFSET_BITS=64
519.lbm_r: -D_FILE_OFFSET_BITS=64
521.wrf_r: -D_FILE_OFFSET_BITS=64
526.blender_r: -DSPEC_NO_ISFINITE -xchar=u -D_FILE_OFFSET_BITS=64
527.cam4_r: -D_FILE_OFFSET_BITS=64
538.imagick_r: -DSPEC_LP64
544.nab_r: -D_FILE_OFFSET_BITS=64
549.fotonik3d_r: -D_FILE_OFFSET_BITS=64
554.roms_r: -D_FILE_OFFSET_BITS=64
```

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xO4
-xtarget=sparc64xplus -xprefetch=latx:0.9
-xprefetch_auto_type=indirect_array_access -xunroll=2
-W2,-Afully_unroll:always=on -Wc,-Qiselect-funcalign=64

538.imagick_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xO4 -m64
-xtarget=sparc64xplus -xinline_param=level:3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Optimization Flags (Continued)

538.imagick_r (continued):

```
-xprefetch=latx:0.7  
-xprefetch_auto_type=indirect_array_access -xunroll=4  
-Wc,-Qiselect-funcalign=4
```

544.nab_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xO4 -xunroll=3
```

C++ benchmarks:

508.namd_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus  
-xalias_level=compatible -Wc,-Qms_pipe+alldoall -std=c++03
```

510.parest_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus  
-xalias_level=compatible -xthroughput=no  
-xprefetch=no%auto -std=c++03
```

Fortran benchmarks:

503.bwaves_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xinline_param=level:1  
-xprefetch=latx:0.5
```

549.fotonik3d_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xthroughput=no  
-xprefetch=latx:0.8  
-xprefetch_auto_type=indirect_array_access -W2,-Rujam
```

554.roms_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus  
-xthroughput=no -xprefetch_auto_type=indirect_array_access  
-xunroll=3 -W2,-Rujam -Wc,-Qiselect-rcpa=2  
-Wc,-Qiselect-rsqrrta=2 -Wc,-Qiselect-rsqrrtalx=2
```

Benchmarks using both Fortran and C:

521.wrf_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Optimization Flags (Continued)

521.wrf_r (continued):

```
-xpagesize=256M -xsegment_align=256M -xthroughput  
-xtarget=sparc64xplus
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32  
-fast(CC) -fast(cc) -xtarget=sparc64xii -xipo=2  
-xpagesize=256M -xsegment_align=256M -xthroughput  
-xtarget=sparc64xplus -xipo=1 -xalias_level=std  
-xthroughput=no -xinline_param=level:3  
-Wc,-Qiselect-rcpa=2 -W2,-Afully_unroll:always=on  
-xalias_level=compatible -features=no%except  
-features=no%rtti -Qoption iropt -Afully_unroll:always=on  
-library=stlport4 -lfast
```

```
526.blender_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32  
-fast(CC) -fast(cc) -xtarget=sparc64xii -xipo=2  
-xpagesize=256M -xsegment_align=256M -xthroughput  
-library=stlport4
```

Benchmarks using Fortran, C, and C++:

```
-xprofile=collect:./feedback -xprofile=use:./feedback -m32 -fast(CC)  
-fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -m64 -Wc,-Qiselect-funcalign=4  
-Qoption cg -Qiselect-funcalign=4 -library=stlport4
```

Peak Other Flags

C benchmarks:

```
-xjobs=8
```

C++ benchmarks:

```
-xjobs=8
```

Fortran benchmarks:

```
-xjobs=8
```

Benchmarks using both Fortran and C:

```
-xjobs=8
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECrate2017_fp_base = 9.65

SPECrate2017_fp_peak = 12.3

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Other Flags (Continued)

Benchmarks using both C and C++:

-xjobs=8

Benchmarks using Fortran, C, and C++:

-xjobs=8

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-27 20:14:28-0500.

Report generated on 2018-10-31 13:39:58 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.