



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 175

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Dec-2017  
Hardware Availability: Sep-2017  
Software Availability: Sep-2017

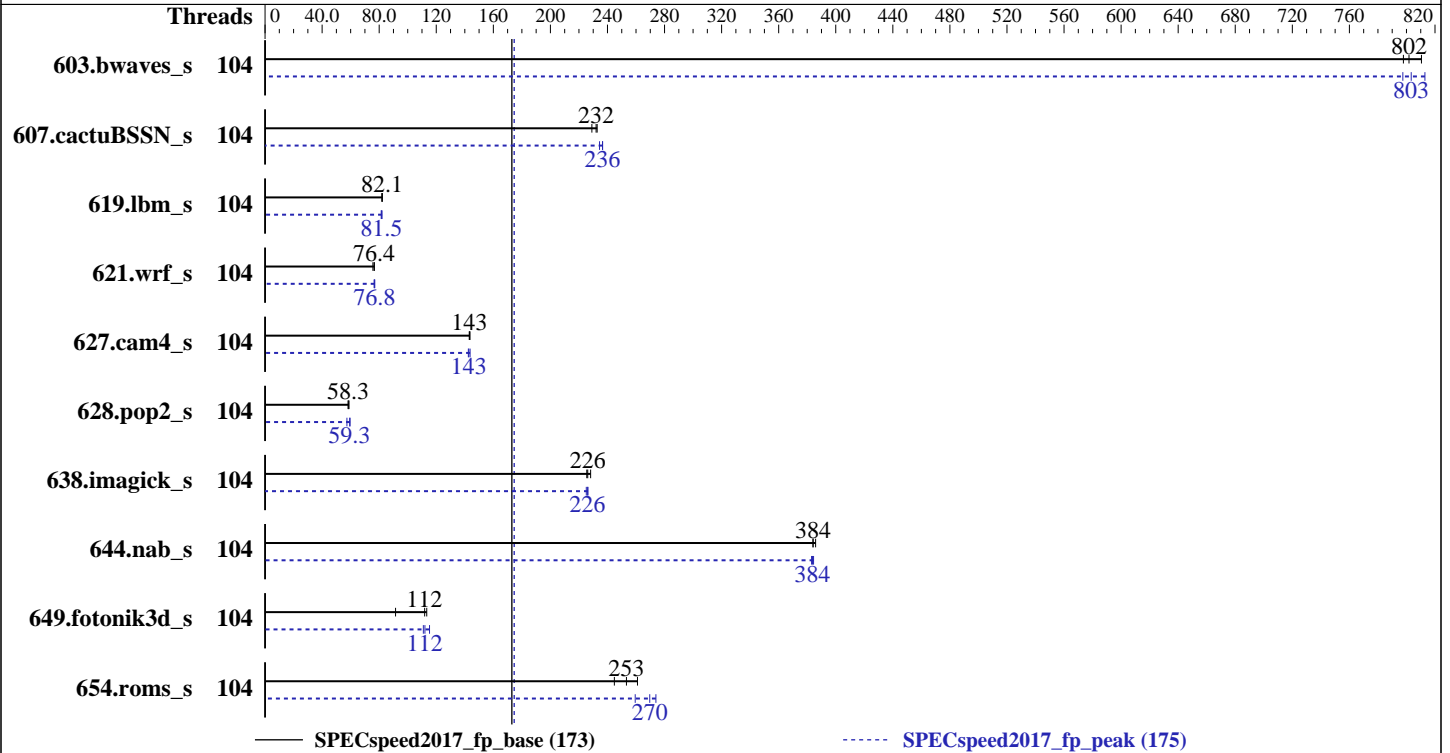

### Hardware

CPU Name: Intel Xeon Platinum 8164  
Max MHz.: 3700  
Nominal: 2000  
Enabled: 104 cores, 4 chips  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 800 GB SAS SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Kernel 4.4.21-69-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: Lenovo BIOS Version PSE105X 1.00 released Aug-2017  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECSpeed2017\_fp\_base = 173

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECSpeed2017\_fp\_peak = 175

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	104	73.9	798	72.8	811	<b><u>73.6</u></b>	<b><u>802</u></b>	104	74.0	797	72.6	813	<b><u>73.4</u></b>	<b><u>803</u></b>
607.cactuBSSN_s	104	71.6	233	72.8	229	<b><u>71.8</u></b>	<b><u>232</u></b>	104	<b><u>70.5</u></b>	<b><u>236</u></b>	71.1	234	70.5	237
619.lbm_s	104	<b><u>63.8</u></b>	<b><u>82.1</u></b>	63.9	81.9	63.8	82.1	104	64.3	81.5	63.9	82.0	<b><u>64.2</u></b>	<b><u>81.5</u></b>
621.wrf_s	104	173	76.6	<b><u>173</u></b>	<b><u>76.4</u></b>	175	75.6	104	<b><u>172</u></b>	<b><u>76.8</u></b>	172	76.9	173	76.4
627.cam4_s	104	61.7	144	61.9	143	<b><u>61.8</u></b>	<b><u>143</u></b>	104	62.2	142	<b><u>62.1</u></b>	<b><u>143</u></b>	61.7	144
628.pop2_s	104	<b><u>204</u></b>	<b><u>58.3</u></b>	202	58.9	204	58.3	104	207	57.4	199	59.6	<b><u>200</u></b>	<b><u>59.3</u></b>
638.imagick_s	104	63.2	228	<b><u>63.8</u></b>	<b><u>226</u></b>	64.0	225	104	64.1	225	<b><u>63.9</u></b>	<b><u>226</u></b>	63.7	226
644.nab_s	104	45.5	384	45.3	386	<b><u>45.5</u></b>	<b><u>384</u></b>	104	<b><u>45.5</u></b>	<b><u>384</u></b>	45.4	384	45.6	383
649.fotonik3d_s	104	<b><u>81.5</u></b>	<b><u>112</u></b>	99.7	91.5	80.4	113	104	<b><u>81.4</u></b>	<b><u>112</u></b>	82.2	111	79.1	115
654.roms_s	104	<b><u>62.2</u></b>	<b><u>253</u></b>	60.3	261	64.3	245	104	<b><u>58.4</u></b>	<b><u>270</u></b>	57.5	274	60.7	259

SPECSpeed2017\_fp\_base = 173

SPECSpeed2017\_fp\_peak = 175

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 175

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

### General Notes (Continued)

generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Hyper-Threading set to Disable  
MONITORMWAIT set to Enable  
DCU Streamer Prefetcher set to Disable  
XPT Prefetcher set to Enable  
Stale AtoS set to Enable  
DCA set to Enable  
Trusted Execution Technology set to Enable  
LLC Deadline Alloc set to Disable  
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on Proton4S-SUSE12SP2 Thu Dec 21 04:20:02 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
 4 "physical id"s (chips)
104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 26
  siblings     : 26
physical 0:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
                29
physical 1:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
                29
physical 2:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
                29
physical 3:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
                29
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 175

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               104
On-line CPU(s) list:  0-103
Thread(s) per core:   1
Core(s) per socket:   26
Socket(s):            4
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:               85
Model name:           Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
Stepping:            4
CPU MHz:              1995.320
BogoMIPS:             3990.64
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            36608K
NUMA node0 CPU(s):   0-25
NUMA node1 CPU(s):   26-51
NUMA node2 CPU(s):   52-77
NUMA node3 CPU(s):   78-103
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
node 0 size: 386500 MB
node 0 free: 385222 MB
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
51

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_fp\_base = 173

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_peak = 175

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

node 1 size: 387042 MB
node 1 free: 385723 MB
node 2 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76
77
node 2 size: 387042 MB
node 2 free: 385535 MB
node 3 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101
102 103
node 3 size: 387038 MB
node 3 free: 385694 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10

From /proc/meminfo
MemTotal:      1584766852 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux Proton4S-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 20 23:23

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        btrfs    743G  193G  550G  26% /home

```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 175

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[PSE105X-1.00]- 08/17/2017

Memory:

48x NO DIMM NO DIMM

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 619.lbm\_s(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_fp\_base = 173

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_peak = 175

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 603.bwaves\_s(peak) 649.fotonik3d\_s(peak) 654.roms\_s(peak)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 621.wrf\_s(base) 627.cam4\_s(base, peak) 628.pop2\_s(base)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 621.wrf\_s(peak) 628.pop2\_s(peak)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 173

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_peak = 175

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_fp\_base = 173

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_peak = 175

**CPU2017 License:** 9017

**Test Date:** Dec-2017

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Sep-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Sep-2017

## Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 173

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_peak = 175

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

638.imagick\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP -nostandard-realloc-lhs  
-align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR950  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECspeed2017\_fp\_base = 173

SPECspeed2017\_fp\_peak = 175

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-20 15:20:01-0500.

Report generated on 2018-10-31 16:53:36 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.