



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55


Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

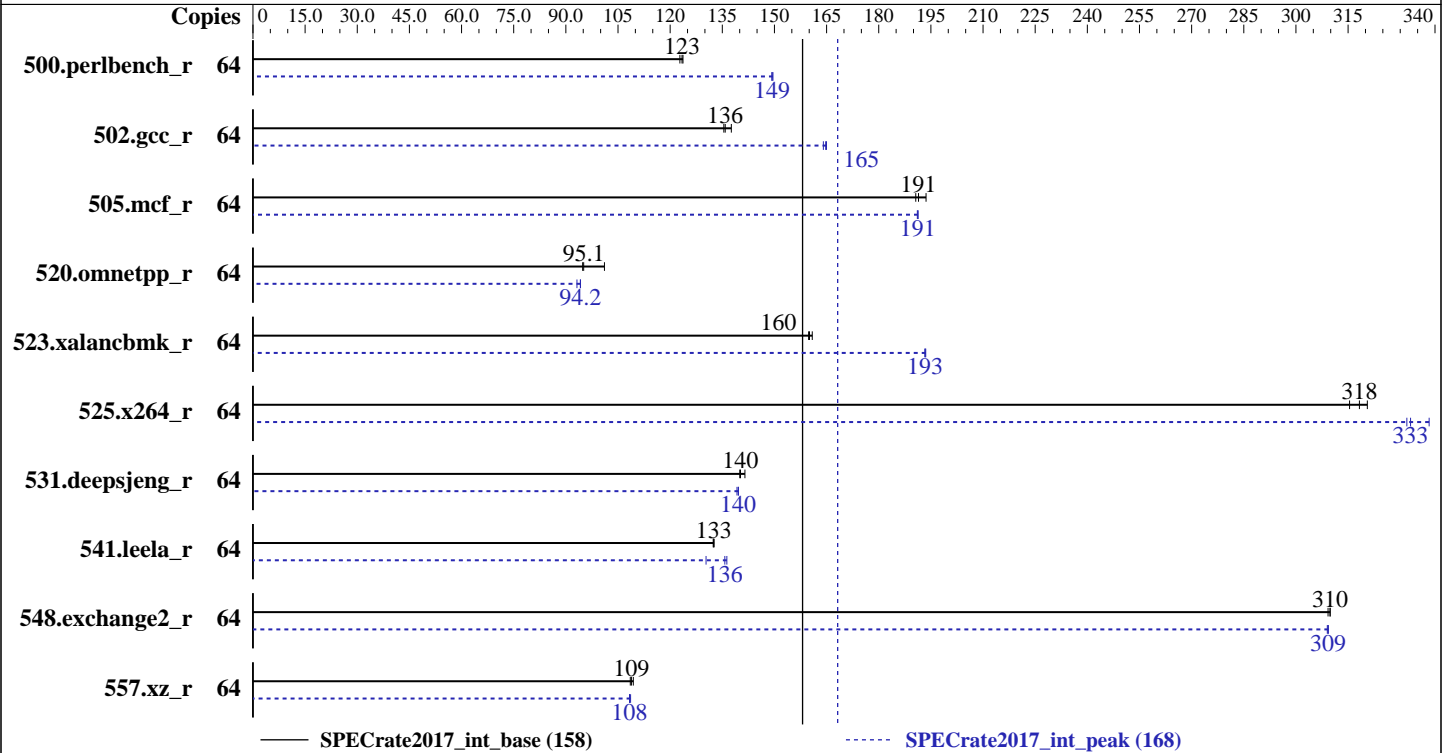

Hardware

CPU Name: Intel Xeon Gold 6130
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 TB SATA 7200 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
 4.4.114-94.11-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 1.3.7 released Feb-2018
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library, version 5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2018
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	824	124	<u>826</u>	<u>123</u>	830	123	64	681	150	683	149	<u>682</u>	<u>149</u>
502.gcc_r	64	659	138	<u>667</u>	<u>136</u>	669	135	64	552	164	549	165	<u>550</u>	<u>165</u>
505.mcf_r	64	534	194	542	191	<u>540</u>	<u>191</u>	64	541	191	541	191	<u>541</u>	<u>191</u>
520.omnetpp_r	64	831	101	<u>883</u>	<u>95.1</u>	885	94.8	64	901	93.2	891	94.2	<u>892</u>	<u>94.2</u>
523.xalancbmk_r	64	420	161	<u>422</u>	<u>160</u>	423	160	64	349	194	<u>350</u>	<u>193</u>	350	193
525.x264_r	64	355	315	350	321	<u>352</u>	<u>318</u>	64	<u>337</u>	<u>333</u>	338	332	331	338
531.deepsjeng_r	64	518	142	524	140	<u>523</u>	<u>140</u>	64	525	140	<u>525</u>	<u>140</u>	527	139
541.leela_r	64	799	133	<u>800</u>	<u>133</u>	801	132	64	778	136	813	130	<u>781</u>	<u>136</u>
548.exchange2_r	64	541	310	542	309	<u>541</u>	<u>310</u>	64	542	309	<u>542</u>	<u>309</u>	543	309
557.xz_r	64	632	109	<u>635</u>	<u>109</u>	637	109	64	636	109	638	108	<u>638</u>	<u>108</u>

SPECrate2017_int_base = 158

SPECrate2017_int_peak = 168

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available via jemalloc.net

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

```
BIOS settings:
Sub NUMA Cluster enabled
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1EE disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /root/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-ejwa Mon Feb 19 23:46:32 2018
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             4
Vendor ID:                GenuineIntel
CPU family:               6
Model:                   85
Model name:               Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:                 4
CPU MHz:                  2095.079
BogoMIPS:                 4190.15
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 22528K
NUMA node0 CPU(s):       0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
NUMA node1 CPU(s):       1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
NUMA node2 CPU(s):       2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
NUMA node3 CPU(s):       3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
node 0 size: 46971 MB
node 0 free: 46713 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61
node 1 size: 48374 MB
node 1 free: 48190 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62
node 2 size: 48374 MB
node 2 free: 48182 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63
node 3 size: 48372 MB
node 3 free: 48181 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

node distances:

```

node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

From /proc/meminfo

```

MemTotal:      196702760 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux linux-ejwa 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 19 23:43

SPEC is set to: /root/cpu2017

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        btrfs    855G      36G  820G   5% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.3.7 02/09/2018

Memory:

```

3x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666
9x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
4x Not Specified Not Specified

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
     541.leela_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalanbmk_r(peak) 531.deepsjeng_r(peak)
     541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbenc_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib

-ljemalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -fno-alias

-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 158

PowerEdge M640 (Intel Xeon Gold 6130, 2.10 GHz)

SPECrate2017_int_peak = 168

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-02-20 00:46:32-0500.

Report generated on 2018-10-31 17:09:01 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-20.