



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

**SPECrate2017\_int\_base = 119**

**SPECrate2017\_int\_peak = 125**

CPU2017 License: 001176


Test Date: Mar-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Sep-2017

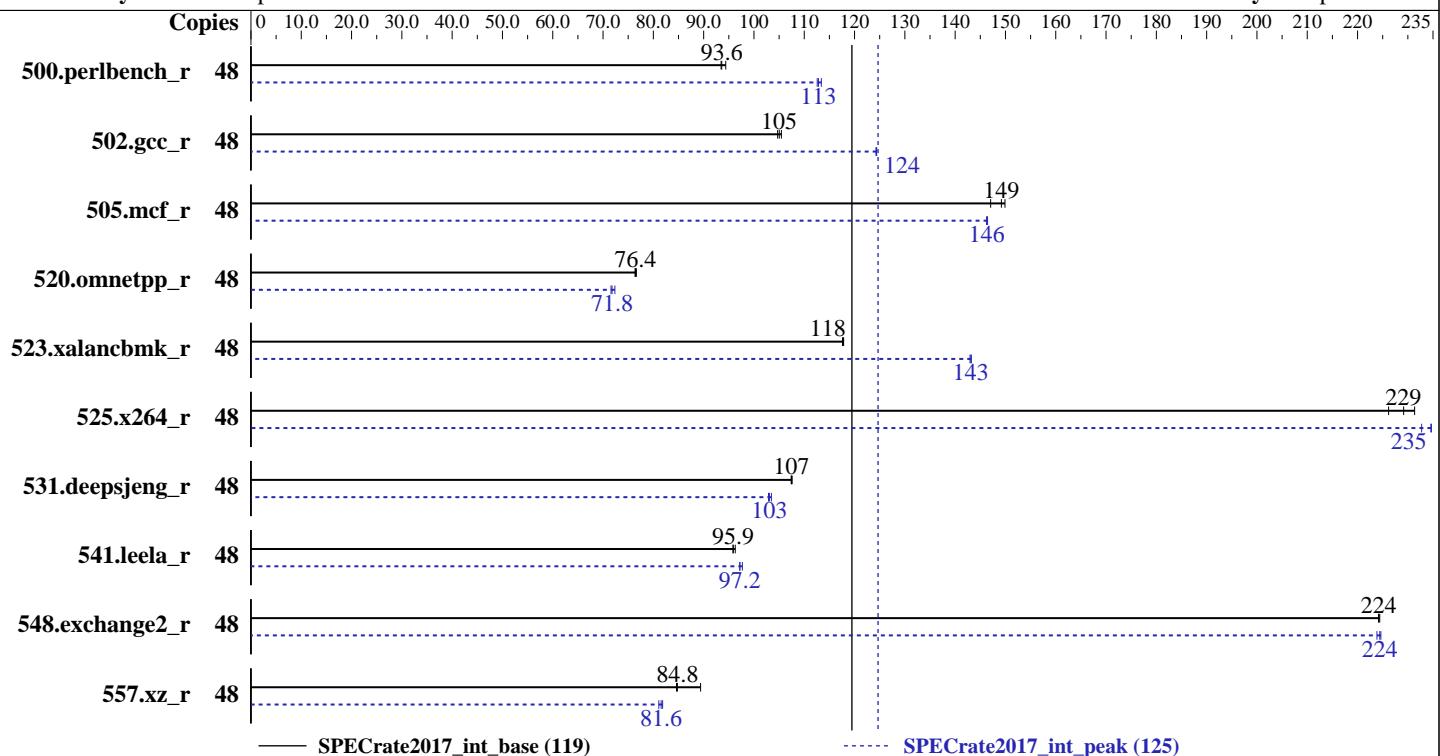

— SPECrate2017\_int\_base (119)

— SPECrate2017\_int\_peak (125)

### Hardware

CPU Name: Intel Xeon Gold 5118  
Max MHz.: 3200  
Nominal: 2300  
Enabled: 24 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 16.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
Storage: 1 x 5 TB SATA III , 7200 RPM  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
4.4.114-94.14-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Supermicro BIOS version 2.0b released Mar-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

**SPECrate2017\_int\_base = 119**

**SPECrate2017\_int\_peak = 125**

CPU2017 License: 001176

Test Date: Mar-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	810	94.4	<b>816</b>	<b>93.6</b>	818	93.5	48	674	113	679	113	<b>677</b>	<b>113</b>
502.gcc_r	48	645	105	649	105	<b>647</b>	<b>105</b>	48	546	124	<b>547</b>	<b>124</b>	547	124
505.mcf_r	48	517	150	<b>520</b>	<b>149</b>	527	147	48	530	146	<b>530</b>	<b>146</b>	530	146
520.omnetpp_r	48	<b>824</b>	<b>76.4</b>	825	76.4	822	76.6	48	870	72.3	880	71.6	<b>877</b>	<b>71.8</b>
523.xalancbmk_r	48	<b>430</b>	<b>118</b>	431	118	430	118	48	355	143	<b>354</b>	<b>143</b>	354	143
525.x264_r	48	372	226	363	231	<b>367</b>	<b>229</b>	48	361	233	358	235	<b>358</b>	<b>235</b>
531.deepsjeng_r	48	511	108	<b>512</b>	<b>107</b>	512	107	48	532	103	<b>534</b>	<b>103</b>	535	103
541.leela_r	48	829	95.8	826	96.3	<b>829</b>	<b>95.9</b>	48	<b>818</b>	<b>97.2</b>	814	97.7	818	97.2
548.exchange2_r	48	560	224	<b>561</b>	<b>224</b>	561	224	48	<b>560</b>	<b>224</b>	560	225	<b>562</b>	224
557.xz_r	48	580	89.4	<b>611</b>	<b>84.8</b>	613	84.6	48	639	81.1	<b>636</b>	<b>81.6</b>	633	81.8

**SPECrate2017\_int\_base = 119**

**SPECrate2017\_int\_peak = 125**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available via jemalloc.net or

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

**SPECrate2017\_int\_base = 119**

**SPECrate2017\_int\_peak = 125**

**CPU2017 License:** 001176

**Test Date:** Mar-2018

**Test Sponsor:** Supermicro

**Hardware Availability:** Jul-2017

**Tested by:** Supermicro

**Software Availability:** Sep-2017

## General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Power Technology = Custom

SNC = Enable

Stale AtoS = Enable

LLC dead line alloc = Disable

IMC Interleaving = 1-way Interleave

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on 200-101 Sun Mar 18 19:30:39 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz  
2 "physical id"s (chips)  
48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12  
siblings : 24  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	48
On-line CPU(s) list:	0-47
Thread(s) per core:	2
Core(s) per socket:	12
Socket(s):	2

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

**SPECrate2017\_int\_base = 119**

**SPECrate2017\_int\_peak = 125**

**CPU2017 License:** 001176

**Test Date:** Mar-2018

**Test Sponsor:** Supermicro

**Hardware Availability:** Jul-2017

**Tested by:** Supermicro

**Software Availability:** Sep-2017

## Platform Notes (Continued)

NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz  
Stepping: 4  
CPU MHz: 2299.992  
BogoMIPS: 4599.98  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 16896K  
NUMA node0 CPU(s): 0-2,6-8,24-26,30-32  
NUMA node1 CPU(s): 3-5,9-11,27-29,33-35  
NUMA node2 CPU(s): 12-14,18-20,36-38,42-44  
NUMA node3 CPU(s): 15-17,21-23,39-41,45-47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm hwp\_epp intel\_pt rsb\_ctxsw spec\_ctrl retpoline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc pkru ospke

/proc/cpuinfo cache data  
cache size : 16896 KB

From numactl --hardware   WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32  
node 0 size: 95336 MB  
node 0 free: 95002 MB  
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35  
node 1 size: 96759 MB  
node 1 free: 96432 MB  
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44  
node 2 size: 96759 MB  
node 2 free: 96458 MB  
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47  
node 3 size: 96756 MB  
node 3 free: 96467 MB  
node distances:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

SPECrate2017\_int\_base = 119

SPECrate2017\_int\_peak = 125

CPU2017 License: 001176

Test Date: Mar-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node   0   1   2   3
 0:  10  11  21  21
 1:  11  10  21  21
 2:  21  21  10  11
 3:  21  21  11  10
```

```
From /proc/meminfo
  MemTotal:      394865820 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
  SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
  os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
  Linux 200-101 4.4.114-94.14-default #1 SMP Mon Feb 19 14:46:07 UTC 2018 (14c5f0f)
  x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 18 19:21
```

```
SPEC is set to: /home/cpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda4        xfs   4.6T  9.1G  4.5T   1%  /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0b 03/07/2018

Memory:

12x SK Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_int\_base = 119

SPECrate2017\_int\_peak = 125

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
    525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
    541.leela_r(base)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
    541.leela_r(peak)
=====
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
=====
```

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_int\_base = 119

SPECrate2017\_int\_peak = 125

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -mtune=skylake -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -mtune=skylake -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -mtune=skylake -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_int\_base = 119

SPECrate2017\_int\_peak = 125

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Base Other Flags (Continued)

Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -mtune=skylake  
-qopt-prefetch -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/jet5.0.1-64/lib  
-ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_int\_base = 119

SPECrate2017\_int\_peak = 125

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -mtune=skylake  
-qopt-prefetch -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: -Wl,-z,muldefs -xCORE-AVX2 -mtune=skylake -ipo -O3  
-no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX2 -mtune=skylake -ipo -O3  
-no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -mtune=skylake  
-qopt-prefetch -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -mtune=skylake  
-qopt-prefetch -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -mtune=skylake -ipo -O3 -no-prec-div  
-qopt-prefetch -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte -L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 6019P-WT  
(X11DDW-L, Intel Xeon Gold 5118)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

**SPECrate2017\_int\_base = 119**

**SPECrate2017\_int\_peak = 125**

**Test Date:** Mar-2018

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Peak Other Flags (Continued)

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-03-18 22:30:38-0400.

Report generated on 2018-10-31 17:47:38 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-17.