



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### Synergy 660 Gen10


(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: May-2018

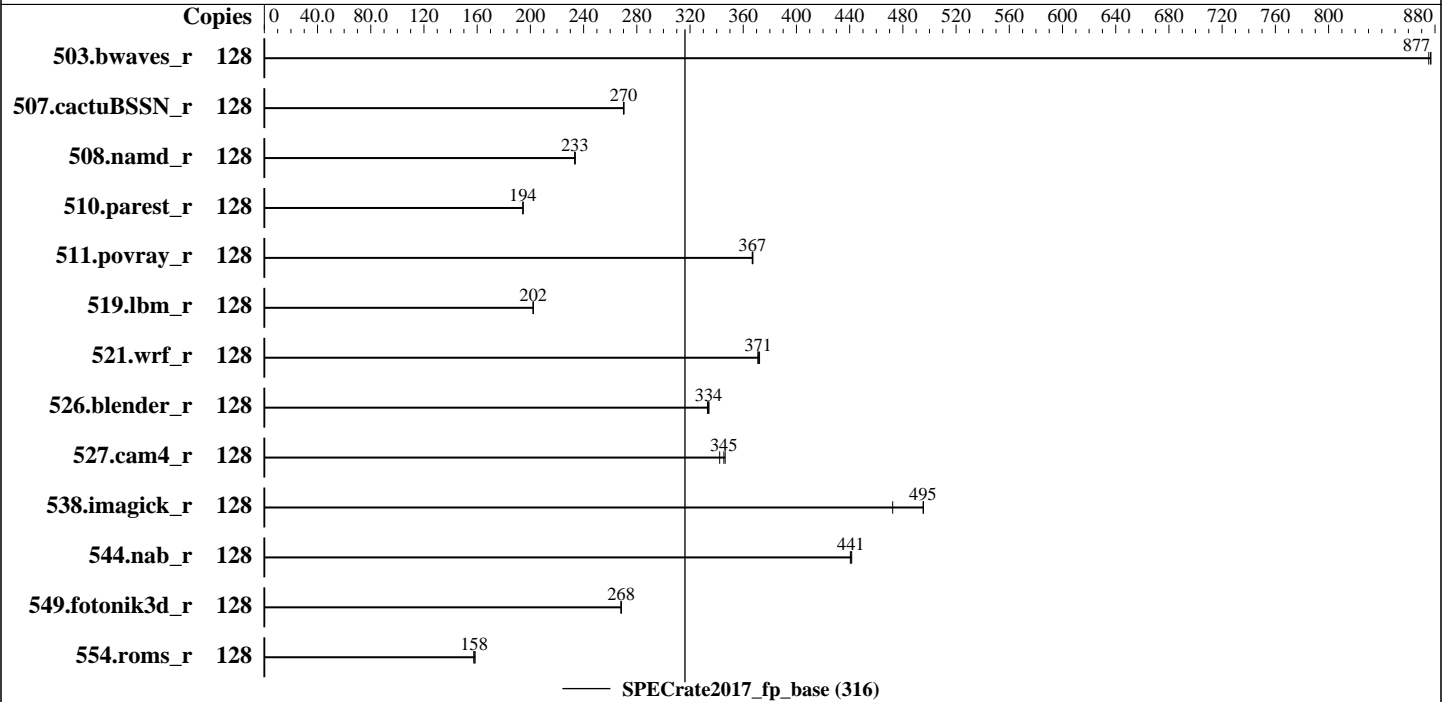

### Hardware

CPU Name: Intel Xeon Gold 6130  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 64 cores, 4 chips, 2 threads/core  
 Orderable: 1, 2, 4 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 400 GB SAS SSD, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.131-94.25-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version I43 06/15/2018 released Jul-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 660 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b>1464</b>	<b>877</b>	1466	875	1464	877							
507.cactuBSSN_r	128	<b>600</b>	<b>270</b>	599	270	600	270							
508.namd_r	128	520	234	<b>521</b>	<b>233</b>	521	233							
510.parest_r	128	1722	194	1723	194	<b>1722</b>	<b>194</b>							
511.povray_r	128	<b>815</b>	<b>367</b>	815	367	814	367							
519.lbm_r	128	<b>667</b>	<b>202</b>	668	202	667	202							
521.wrf_r	128	770	372	773	371	<b>772</b>	<b>371</b>							
526.blender_r	128	583	334	585	333	<b>584</b>	<b>334</b>							
527.cam4_r	128	<b>648</b>	<b>345</b>	646	346	654	342							
538.imagick_r	128	674	472	<b>643</b>	<b>495</b>	642	496							
544.nab_r	128	489	441	<b>488</b>	<b>441</b>	488	442							
549.fotonik3d_r	128	1859	268	1860	268	<b>1860</b>	<b>268</b>							
554.roms_r	128	<b>1289</b>	<b>158</b>	1283	158	1292	157							

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default.  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
irqbalance service stopped using "systemctl stop irqbalance.service"  
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"  
Numa Balancing disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"  
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2018

**Software Availability:** May-2018

## General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Memory Patrol Scrubbing set to Disabled  
Thermal Configuration set to Maximum Cooling  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Stale A to S set to Enabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on sy660-mvb-hjp Thu Jun 21 04:04:53 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 4 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 128
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** May-2018

## Platform Notes (Continued)

```

On-line CPU(s) list:    0-127
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:               4
CPU MHz:                2095.098
BogoMIPS:               4190.19
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               22528K
NUMA node0 CPU(s):     0-7,64-71
NUMA node1 CPU(s):     8-15,72-79
NUMA node2 CPU(s):     16-23,80-87
NUMA node3 CPU(s):     24-31,88-95
NUMA node4 CPU(s):     32-39,96-103
NUMA node5 CPU(s):     40-47,104-111
NUMA node6 CPU(s):     48-55,112-119
NUMA node7 CPU(s):     56-63,120-127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 96336 MB
node 0 free: 95956 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 96765 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** May-2018

## Platform Notes (Continued)

```

node 1 free: 96561 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 96765 MB
node 2 free: 96644 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 96765 MB
node 3 free: 96648 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 96765 MB
node 4 free: 96652 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 96765 MB
node 5 free: 96649 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 96765 MB
node 6 free: 96657 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 96764 MB
node 7 free: 96655 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  31  31  31  31  31  31
  1:  21  10  31  31  31  31  31  31
  2:  31  31  10  21  31  31  31  31
  3:  31  31  21  10  31  31  31  31
  4:  31  31  31  31  10  21  31  31
  5:  31  31  31  31  21  10  31  31
  6:  31  31  31  31  31  31  10  21
  7:  31  31  31  31  31  31  21  10

```

From /proc/meminfo

```

MemTotal:      792262112 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2018

**Software Availability:** May-2018

## Platform Notes (Continued)

```
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux sy660-mvb-hjp 4.4.131-94.25-default #1 SMP Mon May 7 11:22:19 UTC 2018 (9700bac)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 21 04:03

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G   41G  291G  13% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I43 06/15/2018

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
```

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

```
=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
```

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

```
=====
CC 511.povray_r(base) 526.blender_r(base)
-----
```

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** May-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 507.cactuBSSN\_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 660 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** May-2018

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 660 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECrate2017\_fp\_base = 316

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jun-2018

**Hardware Availability:** Jul-2018

**Software Availability:** May-2018

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revI.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revI.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-20 18:34:52-0400.

Report generated on 2018-10-31 18:55:39 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-10.