



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation


SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jun-2018  
Hardware Availability: Jun-2018  
Software Availability: Mar-2018

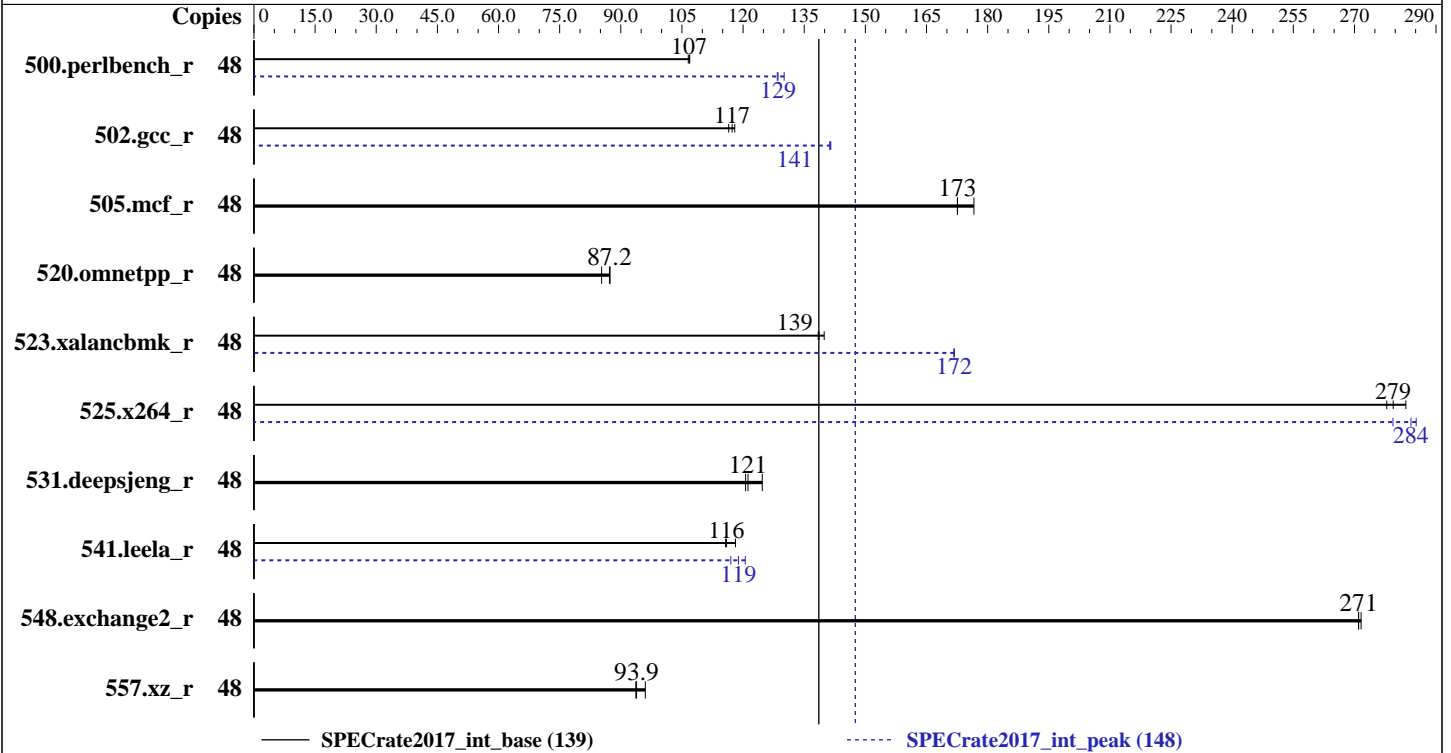

### Hardware

CPU Name: Intel Xeon Gold 6126  
Max MHz.: 3700  
Nominal: 2600  
Enabled: 24 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 19.25 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
Kernel 3.10.0-693.21.1.el7.x86\_64  
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: NEC BIOS Version U30 02/15/2018 released Mar-2018  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jun-2018  
Hardware Availability: Jun-2018  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	715	107	<b><u>716</u></b>	<b><u>107</u></b>	717	107	48	587	130	<b><u>594</u></b>	<b><u>129</u></b>	595	128
502.gcc_r	48	576	118	<b><u>579</u></b>	<b><u>117</u></b>	584	116	48	<b><u>481</u></b>	<b><u>141</u></b>	481	141	480	142
505.mcf_r	48	439	177	<b><u>449</u></b>	<b><u>173</u></b>	449	173	48	439	177	<b><u>449</u></b>	<b><u>173</u></b>	449	173
520.omnetpp_r	48	721	87.4	<b><u>722</u></b>	<b><u>87.2</u></b>	738	85.3	48	721	87.4	<b><u>722</u></b>	<b><u>87.2</u></b>	738	85.3
523.xalancbmk_r	48	362	140	366	138	<b><u>366</u></b>	<b><u>139</u></b>	48	<b><u>295</u></b>	<b><u>172</u></b>	295	172	295	172
525.x264_r	48	<b><u>301</u></b>	<b><u>279</u></b>	297	283	302	278	48	<b><u>296</u></b>	<b><u>284</u></b>	295	285	301	279
531.deepsjeng_r	48	441	125	<b><u>454</u></b>	<b><u>121</u></b>	456	121	48	441	125	<b><u>454</u></b>	<b><u>121</u></b>	456	121
541.leela_r	48	687	116	673	118	<b><u>686</u></b>	<b><u>116</u></b>	48	679	117	659	121	<b><u>669</u></b>	<b><u>119</u></b>
548.exchange2_r	48	<b><u>464</u></b>	<b><u>271</u></b>	464	271	463	272	48	<b><u>464</u></b>	<b><u>271</u></b>	464	271	463	272
557.xz_r	48	540	96.0	<b><u>552</u></b>	<b><u>93.9</u></b>	553	93.7	48	540	96.0	<b><u>552</u></b>	<b><u>93.9</u></b>	553	93.7

SPECrate2017\_int\_base = 139

SPECrate2017\_int\_peak = 148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2018  
**Software Availability:** Mar-2018

### General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling  
Workload Profile: General Throughput Compute  
Memory Patrol Scrubbing: Disabled  
LLC Dead Line Allocation: Disabled  
LLC Prefetch: Enabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on r120h2m Thu Jun 28 19:16:07 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 3 4 5 6 8 9 10 11 12 13
physical 1: cores 0 1 2 4 5 6 8 9 10 11 13 14
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
Stepping: 4
CPU MHz: 2600.000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 48812 MB
node 0 free: 47449 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 49152 MB
node 1 free: 47889 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 49152 MB
node 2 free: 48011 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 49151 MB
node 3 free: 48013 MB
node distances:
node  0  1  2  3
0:  10  21  31  31
1:  21  10  31  31
2:  31  31  10  21

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

3: 31 31 21 10

From /proc/meminfo

MemTotal: 197745876 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"  
VERSION="7.4 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VARIANT="Server"  
VARIANT\_ID="server"  
VERSION\_ID="7.4"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"

redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.4:ga:server

uname -a:

Linux r120h2m 3.10.0-693.21.1.el7.x86\_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86\_64  
x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences  
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Jun 28 19:10

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	909G	330G	533G	39%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS NEC U30 02/15/2018

Memory:

24x HPE 876319-081 8 GB 2 rank 2666

(End of data from sysinfo program)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2018  
**Software Availability:** Mar-2018

### Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)

-----  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak) 505.mcf\_r(peak) 525.x264\_r(peak)  
557.xz\_r(peak)

-----  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)

-----  
icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base)

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(peak)

-----  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2018

Hardware Availability: Jun-2018

Software Availability: Mar-2018

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Jun-2018

**Hardware Availability:** Jun-2018

**Software Availability:** Mar-2018

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate2017\_int\_base = 139

Express5800/R120h-2M (Intel Xeon Gold 6126)

SPECrate2017\_int\_peak = 148

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Jun-2018

**Hardware Availability:** Jun-2018

**Software Availability:** Mar-2018

## Peak Optimization Flags (Continued)

```
525.x264_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-06-28 06:16:07-0400.

Report generated on 2018-10-31 18:45:55 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-24.