



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_int\_base = 93.0

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Nov-2017

Software Availability: Feb-2018

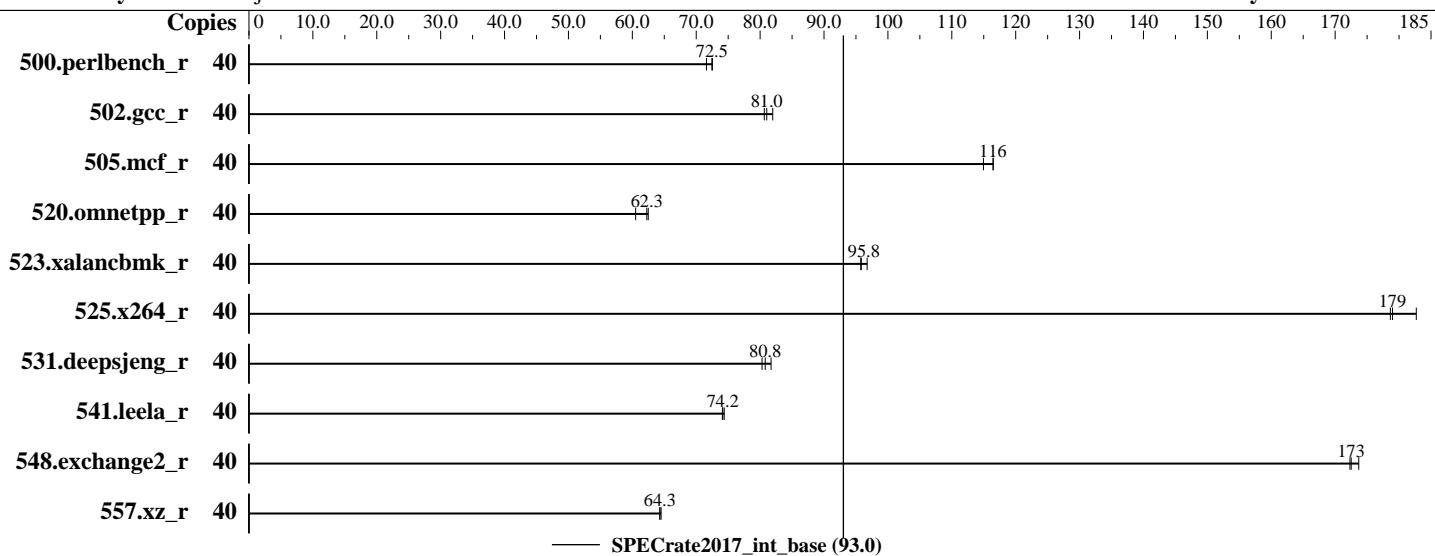

### Hardware

CPU Name: Intel Xeon Silver 4114  
Max MHz.: 3000  
Nominal: 2200  
Enabled: 20 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 13.75 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (12 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)  
Storage: 96 GB tmpfs  
Other: 1 x SATA HDD, 1000 GB, 7200 RPM, used for swap

### Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.114-92.64-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Fujitsu BIOS Version R1.22.0 for D3386-A1x released Jun-2018  
File System: tmpfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

**SPECrate2017\_int\_base = 93.0**

**SPECrate2017\_int\_peak = Not Run**

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Nov-2017

Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	<b>879</b>	<b>72.5</b>	878	72.5	889	71.6							
502.gcc_r	40	691	82.0	<b>699</b>	<b>81.0</b>	702	80.7							
505.mcf_r	40	<b>555</b>	<b>116</b>	562	115	555	116							
520.omnetpp_r	40	840	62.5	<b>843</b>	<b>62.3</b>	867	60.5							
523.xalancbmk_r	40	437	96.8	<b>441</b>	<b>95.8</b>	441	95.8							
525.x264_r	40	<b>391</b>	<b>179</b>	392	179	383	183							
531.deepsjeng_r	40	561	81.7	<b>567</b>	<b>80.8</b>	571	80.3							
541.leela_r	40	894	74.1	891	74.4	<b>893</b>	<b>74.2</b>							
548.exchange2_r	40	<b>608</b>	<b>173</b>	608	172	603	174							
557.xz_r	40	672	64.3	670	64.5	<b>672</b>	<b>64.3</b>							

**SPECrate2017\_int\_base = 93.0**

**SPECrate2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-39
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=96g,rw tmpfs /home/memory
cpu idle state set with:
cpupower idle-set -d 1
Process tuning settings:
echo 0 > /proc/sys/kernel/numa_balancing
```

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/je5.0.1-64"
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_int\_base = 93.0

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2018

Test Sponsor: Fujitsu

Hardware Availability: Nov-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Override OS Energy Performance = Enabled

Energy Performance = Performance

Utilization Profile = Unbalanced

Package C State limit = C0

Stale AtoS = Enabled

IMC Interleaving = 2-way

Sub NUMA Clustering = Disabled

FAN Control = Full

Sysinfo program /home/memory/speccpu/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on TX2550M4 Thu Jun 28 12:59:50 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz  
2 "physical id"s (chips)  
40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_int\_base = 93.0

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2018

Test Sponsor: Fujitsu

Hardware Availability: Nov-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Platform Notes (Continued)

```
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                40
On-line CPU(s) list:  0-39
Thread(s) per core:   2
Core(s) per socket:   10
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
Stepping:               4
CPU MHz:               2653.809
CPU max MHz:           3000.0000
CPU min MHz:           800.0000
BogoMIPS:              4389.69
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              14080K
NUMA node0 CPU(s):    0-9,20-29
NUMA node1 CPU(s):    10-19,30-39
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
          pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
          lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
          aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
          fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
          xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
          dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl retpoline
          kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep
          bmi2 erms invpcid rtm cqmq mpx avx512f avx512dq rdseed adx smap clflushopt clwb
          avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occur_llc
```

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_int\_base = 93.0

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2018

Test Sponsor: Fujitsu

Hardware Availability: Nov-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Platform Notes (Continued)

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 94874 MB
node 0 free: 85870 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 96616 MB
node 1 free: 95644 MB
node distances:
node    0   1
 0: 10  21
 1: 21  10

From /proc/meminfo
MemTotal:           196087396 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux TX2550M4 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 28 08:13

SPEC is set to: /home/memory/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  96G   8.9G   88G  10% /home/memory

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_int\_base = 93.0

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2018

Test Sponsor: Fujitsu

Hardware Availability: Nov-2017

Tested by: Fujitsu

Software Availability: Feb-2018

## Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.22.0 for D3386-Alx  
06/04/2018

Memory:

12x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base)

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_int\_base = 93.0

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Nov-2017

Software Availability: Feb-2018

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX2550 M4, Intel Xeon Silver 4114,  
2.20GHz

SPECrate2017\_int\_base = 93.0

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2018

Test Sponsor: Fujitsu

Hardware Availability: Nov-2017

Tested by: Fujitsu

Software Availability: Feb-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-28 12:59:49-0400.

Report generated on 2018-10-31 18:44:56 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-24.