



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10


(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

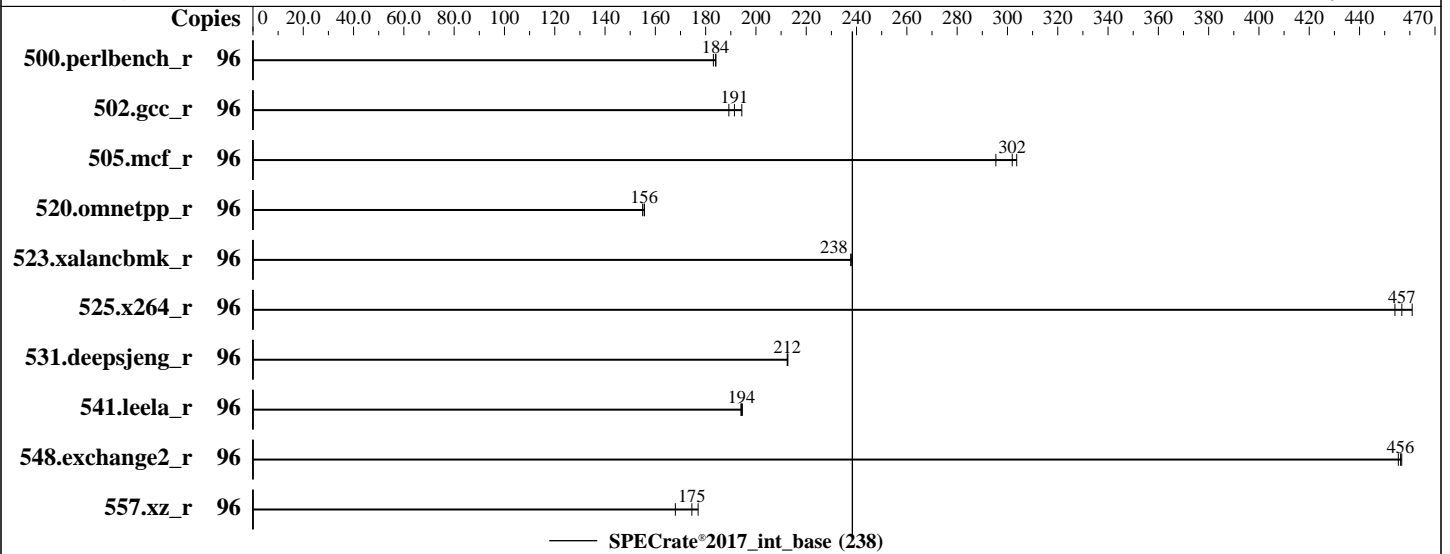

Hardware

CPU Name: Intel Xeon Gold 5118
 Max MHz: 3200
 Nominal: 2300
 Enabled: 48 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chip (s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
 Storage: 2 x 400 GB SSD SATA, RAID 1
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Kernel 4.4.131-94.25-default
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: HPE BIOS Version U34 06/15/2018 released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V4.5.0;
 Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	831	184	830	184	835	183							
502.gcc_r	96	710	191	718	189	699	194							
505.mcf_r	96	511	304	514	302	525	295							
520.omnetpp_r	96	809	156	810	156	813	155							
523.xalancbmk_r	96	427	238	426	238	426	238							
525.x264_r	96	368	457	370	454	365	461							
531.deepsjeng_r	96	518	212	517	213	518	212							
541.leela_r	96	817	195	819	194	818	194							
548.exchange2_r	96	551	456	551	457	552	455							
557.xz_r	96	586	177	594	175	617	168							

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
IRQ balance service was stopped using "systemctl stop irqbalance.service"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
Numa Balancing disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Speculative Store Bypass (CVE-2018-3639) mitigation was disabled system-wide via kernel boot parameter "spec_store_bypass_disable=off"
Benchmark was conducted on a pre-release kernel (Kernel 4.4.131-94.25-default) which has the same performance as the release version (Kernel 4.4.131-94.29-default)

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation, was obtained at <https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2> jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

LLC Dead Line Allocation set to Disabled

Stale A to S set to Enabled

LLC Prefetch set to Enabled

Memory Patrol Scrubbing set to Disabled

Minimum Processor Idle Power Core C-State set to C1E

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on dl560gen10-2 Mon Jul 9 11:10:27 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
```

```
4 "physical id"s (chips)
```

```
96 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
```

```
siblings : 24
```

```
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

```
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

```
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

```
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

From lscpu:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2018
Hardware Availability: Jun-2018
Software Availability: May-2018

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
Stepping:               4
CPU MHz:                2294.605
BogoMIPS:               4589.21
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               16896K
NUMA node0 CPU(s):     0-5,48-53
NUMA node1 CPU(s):     6-11,54-59
NUMA node2 CPU(s):     12-17,60-65
NUMA node3 CPU(s):     18-23,66-71
NUMA node4 CPU(s):     24-29,72-77
NUMA node5 CPU(s):     30-35,78-83
NUMA node6 CPU(s):     36-41,84-89
NUMA node7 CPU(s):     42-47,90-95

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Platform Notes (Continued)

```

node 0 size: 96265 MB
node 0 free: 96020 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 96766 MB
node 1 free: 96520 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 96766 MB
node 2 free: 96661 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 96766 MB
node 3 free: 96657 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 96766 MB
node 4 free: 96658 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 96766 MB
node 5 free: 96666 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 96766 MB
node 6 free: 96663 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 96622 MB
node 7 free: 96517 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 21 31 31 31 31 31 31
  1: 21 10 31 31 31 31 31 31
  2: 31 31 10 21 31 31 31 31
  3: 31 31 21 10 31 31 31 31
  4: 31 31 31 31 10 21 31 31
  5: 31 31 31 31 21 10 31 31
  6: 31 31 31 31 31 31 10 21
  7: 31 31 31 31 31 31 21 10

```

```

From /proc/meminfo
MemTotal:      792047708 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Platform Notes (Continued)

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux dl560gen10-2 4.4.131-94.25-default #1 SMP Mon May 7 11:22:19 UTC 2018 (9700bac)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Jul 9 11:06

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb4       xfs   852G   59G  794G   7% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 06/15/2018

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
-----
```

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Compiler Version Notes (Continued)

```

=====
C++      | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
         | 541.leela_r(base)
=====

```

```

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran | 548.exchange2_r(base)
=====

```

```

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_int_base = 238

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2018-07-09 13:10:27-0400.

Report generated on 2020-06-08 10:58:02 by CPU2017 PDF formatter v6255.

Originally published on 2018-07-27.