



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECrate2017_int_base = 73.4

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_peak = Not Run

CPU2017 License: 97


Test Sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test Date: Sep-2018

Hardware Availability: Oct-2017

Software Availability: Mar-2018

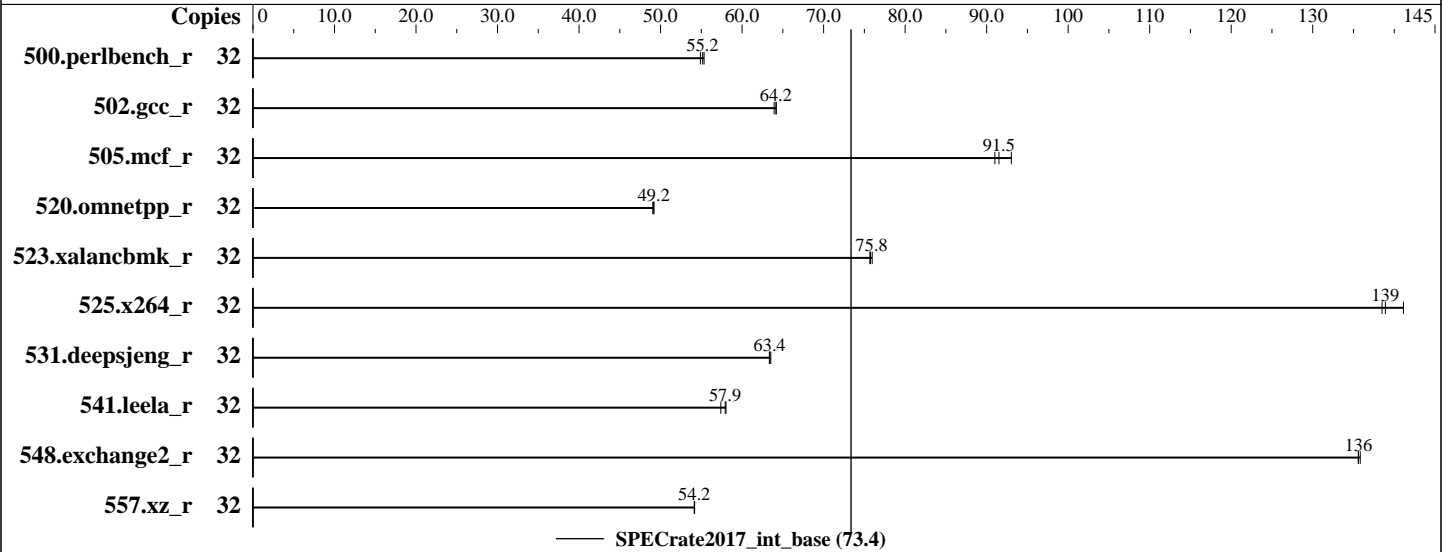

Hardware

CPU Name: Intel Xeon Silver 4110
 Max MHz.: 3000
 Nominal: 2100
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
 Storage: 1 x 1000 GB SATA, 7200 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64) 4.4.120-94.17-default
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 00.01.0013 released Mar-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECrate2017_int_base = 73.4

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_peak = Not Run

CPU2017 License: 97
Test Sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	923	55.2	921	55.3	928	54.9							
502.gcc_r	32	709	63.9	706	64.2	706	64.2							
505.mcf_r	32	568	91.0	556	93.0	565	91.5							
520.omnetpp_r	32	854	49.2	854	49.2	856	49.0							
523.xalancbmk_r	32	447	75.7	446	75.8	445	76.0							
525.x264_r	32	405	139	397	141	403	139							
531.deepsjeng_r	32	579	63.3	577	63.5	579	63.4							
541.leela_r	32	923	57.4	915	57.9	913	58.0							
548.exchange2_r	32	618	136	617	136	618	136							
557.xz_r	32	638	54.2	638	54.2	638	54.1							

SPECrate2017_int_base = 73.4

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/speccpu/cpu2017/lib/ia32:/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-32:/home/speccpu/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default

Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECrate2017_int_base = 73.4

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test Date: Sep-2018

Hardware Availability: Oct-2017

Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

CPU Power and Performance Policy set to Performance

IMC set to 1-way interleaving

Sub_NUMA Cluster set to enabled

Set Fan Profile set to Performance

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-65s1 Wed Sep 19 10:53:14 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 2

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECrate2017_int_base = 73.4

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test Date: Sep-2018

Hardware Availability: Oct-2017

Software Availability: Mar-2018

Platform Notes (Continued)

```
Stepping: 4
CPU MHz: 1016.966
CPU max MHz: 3000.0000
CPU min MHz: 800.0000
BogoMIPS: 4190.19
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku
ospke
```

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 385604 MB
node 0 free: 384944 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 386923 MB
node 1 free: 386414 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 791068792 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECrate2017_int_base = 73.4

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test Date: Sep-2018

Hardware Availability: Oct-2017

Software Availability: Mar-2018

Platform Notes (Continued)

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 3

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION_ID="12.3"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-65s1 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):

Mitigation: PTI

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Sep 19 10:36

SPEC is set to: /home/speccpu/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   929G  269G  661G  29% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.00.01.0013.030920180427 03/09/2018

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECrate2017_int_base = 73.4

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test Date: Sep-2018

Hardware Availability: Oct-2017

Software Availability: Mar-2018

Compiler Version Notes (Continued)

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Acer Incorporated

SPECrate2017_int_base = 73.4

Altos R380 F4 (Intel Xeon Silver 4110)

SPECrate2017_int_peak = Not Run

CPU2017 License: 97

Test Sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test Date: Sep-2018

Hardware Availability: Oct-2017

Software Availability: Mar-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Acer-Platform-Settings-V1.3-revC.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Acer-Platform-Settings-V1.3-revC.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-09-18 22:53:14-0400.

Report generated on 2018-10-31 19:03:08 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-16.