



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation


SPECspeed2017\_fp\_base = 12.4

### Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Oct-2018  
Hardware Availability: Apr-2017  
Software Availability: Mar-2018

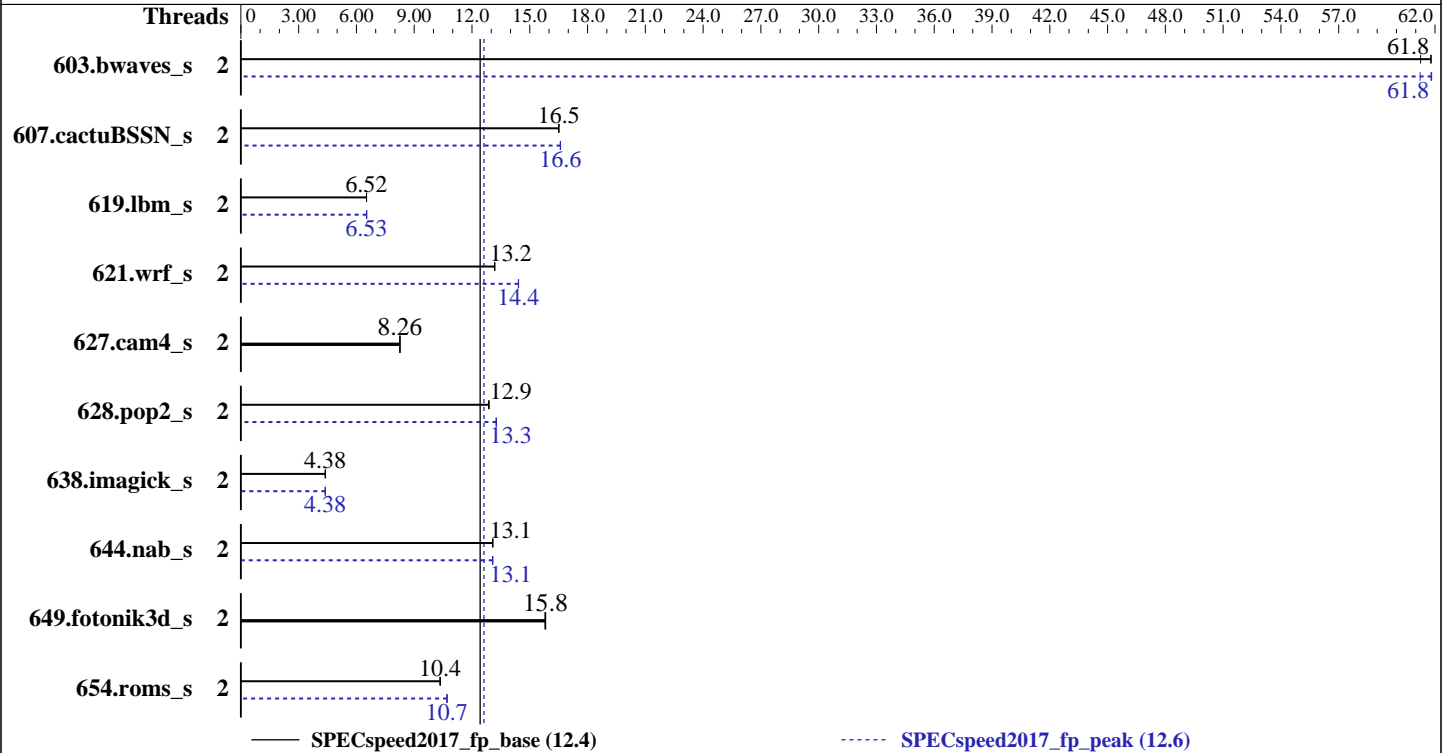

### Hardware

CPU Name: Intel Pentium G4560  
Max MHz.: 3500  
Nominal: 3500  
Enabled: 2 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 3 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)  
Storage: 1 x 1 TB SATA, 7200 RPM  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
Kernel 3.10.0-693.21.1.el7.x86\_64  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: Version 5.0.3006 02/28/2018 released Apr-2018  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECSpeed2017\_fp\_base = 12.4

Express5800/R110i-1 (Intel Pentium G4560)

SPECSpeed2017\_fp\_peak = 12.6

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Oct-2018  
Hardware Availability: Apr-2017  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	2	963	61.3	955	61.8	<b>955</b>	<b>61.8</b>	2	<b>955</b>	<b>61.8</b>	964	61.2	954	61.8
607.cactuBSSN_s	2	1009	16.5	1011	16.5	<b>1010</b>	<b>16.5</b>	2	1005	16.6	1004	16.6	<b>1005</b>	<b>16.6</b>
619.lbm_s	2	803	6.53	<b>803</b>	<b>6.52</b>	803	6.52	2	<b>802</b>	<b>6.53</b>	802	6.53	802	6.53
621.wrf_s	2	1003	13.2	<b>1004</b>	<b>13.2</b>	1004	13.2	2	<b>918</b>	<b>14.4</b>	918	14.4	917	14.4
627.cam4_s	2	<b>1073</b>	<b>8.26</b>	1073	8.26	1074	8.25	2	<b>1073</b>	<b>8.26</b>	1073	8.26	1074	8.25
628.pop2_s	2	<b>922</b>	<b>12.9</b>	923	12.9	922	12.9	2	<b>895</b>	<b>13.3</b>	895	13.3	896	13.3
638.imagick_s	2	3292	4.38	<b>3290</b>	<b>4.38</b>	3288	4.39	2	3292	4.38	3290	4.39	<b>3292</b>	<b>4.38</b>
644.nab_s	2	1336	13.1	<b>1336</b>	<b>13.1</b>	1336	13.1	2	<b>1337</b>	<b>13.1</b>	1337	13.1	1336	13.1
649.fotonik3d_s	2	577	15.8	576	15.8	<b>576</b>	<b>15.8</b>	2	577	15.8	576	15.8	<b>576</b>	<b>15.8</b>
654.roms_s	2	1521	10.4	<b>1521</b>	<b>10.4</b>	1523	10.3	2	1471	10.7	<b>1471</b>	<b>10.7</b>	1472	10.7

SPECSpeed2017\_fp\_base = 12.4

SPECSpeed2017\_fp\_peak = 12.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 12.4

### Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2018  
**Hardware Availability:** Apr-2017  
**Software Availability:** Mar-2018

## Platform Notes

### BIOS Settings:

Power Management Policy: Custom  
Energy Performance: Performance  
Hyper-Threading: Disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on r110i1 Tue Oct 30 20:02:55 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name      : Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
 1 "physical id"s (chips)
 2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 2
siblings       : 2
physical 0:    cores 0 1
```

### From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          2
On-line CPU(s) list:  0,1
Thread(s) per core:  1
Core(s) per socket:  2
Socket(s):       1
NUMA node(s):    1
Vendor ID:       GenuineIntel
CPU family:      6
Model:           158
Model name:      Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
Stepping:        9
CPU MHz:         3347.421
CPU max MHz:     3500.0000
CPU min MHz:     800.0000
BogoMIPS:        7008.00
Virtualization:  VT-x
L1d cache:       32K
L1i cache:       32K
L2 cache:        256K
L3 cache:        3072K
NUMA node0 CPU(s):  0,1
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 12.4

### Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2018  
**Hardware Availability:** Apr-2017  
**Software Availability:** Mar-2018

## Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx est tm2 ssse3 cx16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave rdrand lahf\_lm abm 3dnowprefetch epb invpcid\_single intel\_pt spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust smep erms invpcid mpx rdseed smap clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp\_notify hwp\_act\_window hwp\_epp

```
/proc/cpuinfo cache data
cache size : 3072 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1
node 0 size: 65475 MB
node 0 free: 63633 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65917212 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux r110i1 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 30 19:57
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 12.4

Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Oct-2018  
Hardware Availability: Apr-2017  
Software Availability: Mar-2018

### Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	909G	104G	759G	13%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 5.0.3006 02/28/2018

Memory:

4x Micron 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 619.lbm\_s(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(peak)  
-----

icpc (ICC) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed2017\_fp\_base = 12.4

Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2018  
**Hardware Availability:** Apr-2017  
**Software Availability:** Mar-2018

### Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 603.bwaves\_s(peak) 649.fotonik3d\_s(peak) 654.roms\_s(peak)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 621.wrf\_s(base) 627.cam4\_s(base, peak) 628.pop2\_s(base)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 621.wrf\_s(peak) 628.pop2\_s(peak)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_fp\_base = 12.4

Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

CPU2017 License: 9006

Test Date: Oct-2018

Test Sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Mar-2018

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed2017\_fp\_base = 12.4

Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Oct-2018

Hardware Availability: Apr-2017

Software Availability: Mar-2018

## Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xSSE4.2  
-qopt-prefetch -ipo -O3 -no-prec-div -ffinite-math-only  
-qopt-mem-layout-trans=3 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP

(Continued on next page)





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed2017\_fp\_base = 12.4

Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Oct-2018  
Hardware Availability: Apr-2017  
Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

638.imagick\_s: -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

603.bwaves\_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xSSE4.2 -qopt-prefetch -ipo -O3  
-no-prec-div -ffinite-math-only -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs -align array32byte

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

621.wrf\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xSSE4.2  
-qopt-prefetch -ipo -O3 -no-prec-div -ffinite-math-only  
-qopt-mem-layout-trans=3 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4\_s: basepeak = yes

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -O2 -xSSE4.2 -qopt-prefetch -ipo  
-O3 -no-prec-div -ffinite-math-only -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP -nostandard-realloc-lhs  
-align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed2017\_fp\_base = 12.4

Express5800/R110i-1 (Intel Pentium G4560)

SPECspeed2017\_fp\_peak = 12.6

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Oct-2018

Hardware Availability: Apr-2017

Software Availability: Mar-2018

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-10-30 07:02:54-0400.

Report generated on 2018-11-27 13:26:58 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.