



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation


SPECrate2017\_int\_base = 11.6

### Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Nov-2018  
Hardware Availability: Apr-2017  
Software Availability: Mar-2018

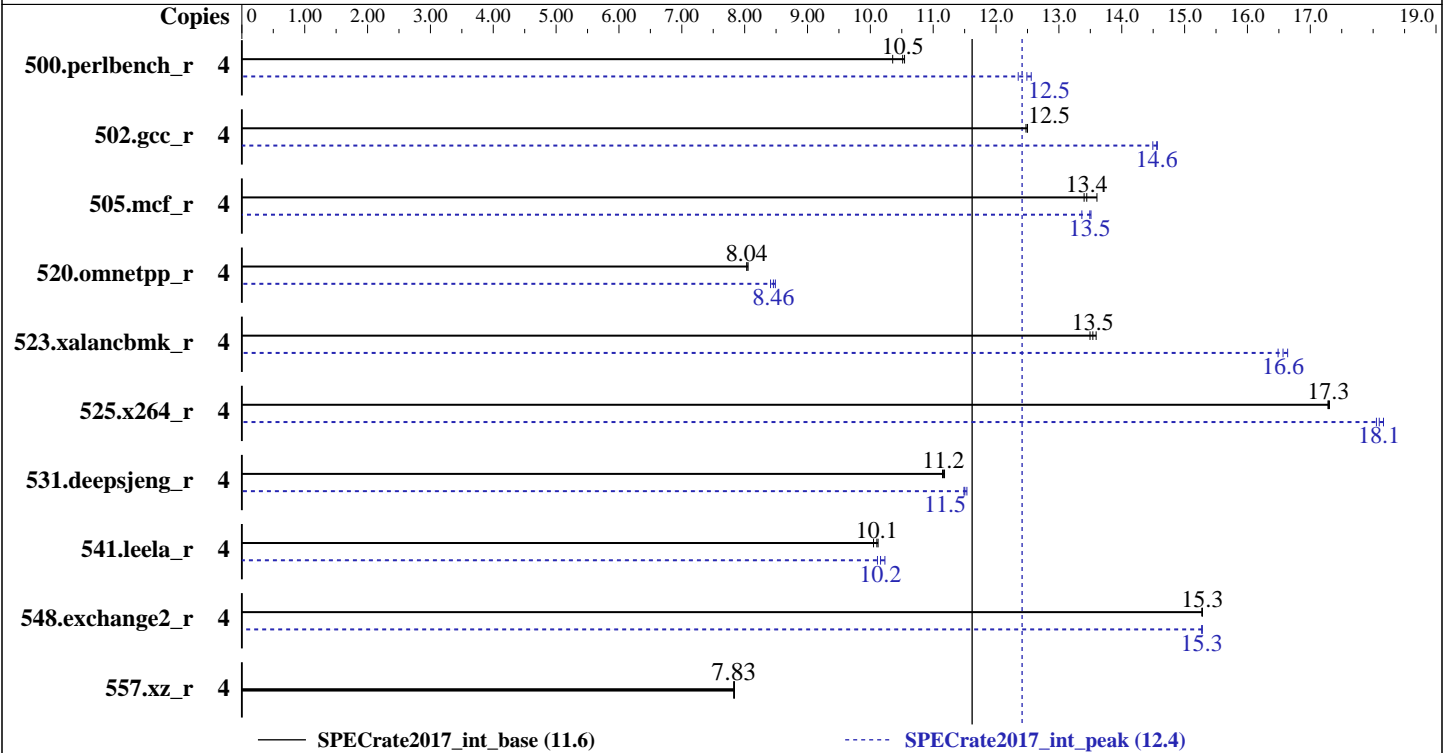

### Hardware

CPU Name: Intel Pentium G4560  
Max MHz.: 3500  
Nominal: 3500  
Enabled: 2 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 3 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)  
Storage: 1 x 1 TB SATA, 7200 RPM  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
Kernel 3.10.0-693.21.1.el7.x86\_64  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 5.0.3006 02/28/2018 released Apr-2018  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Nov-2018  
Hardware Availability: Apr-2017  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	<b>606</b>	<b>10.5</b>	615	10.4	604	10.5	4	<b>510</b>	<b>12.5</b>	516	12.4	507	12.6
502.gcc_r	4	<b>453</b>	<b>12.5</b>	454	12.5	453	12.5	4	391	14.5	<b>389</b>	<b>14.6</b>	389	14.6
505.mcf_r	4	482	13.4	475	13.6	<b>481</b>	<b>13.4</b>	4	<b>479</b>	<b>13.5</b>	484	13.4	478	13.5
520.omnetpp_r	4	653	8.03	652	8.05	<b>653</b>	<b>8.04</b>	4	<b>621</b>	<b>8.46</b>	618	8.49	624	8.41
523.xalancbmk_r	4	311	13.6	<b>312</b>	<b>13.5</b>	313	13.5	4	256	16.5	<b>255</b>	<b>16.6</b>	254	16.6
525.x264_r	4	<b>405</b>	<b>17.3</b>	405	17.3	405	17.3	4	388	18.1	386	18.2	<b>387</b>	<b>18.1</b>
531.deepsjeng_r	4	410	11.2	411	11.1	<b>411</b>	<b>11.2</b>	4	397	11.5	<b>399</b>	<b>11.5</b>	399	11.5
541.leela_r	4	654	10.1	<b>656</b>	<b>10.1</b>	659	10.1	4	647	10.2	<b>652</b>	<b>10.2</b>	655	10.1
548.exchange2_r	4	686	15.3	686	15.3	<b>686</b>	<b>15.3</b>	4	<b>686</b>	<b>15.3</b>	686	15.3	686	15.3
557.xz_r	4	551	7.84	552	7.83	<b>552</b>	<b>7.83</b>	4	551	7.84	552	7.83	<b>552</b>	<b>7.83</b>

SPECrate2017\_int\_base = 11.6

SPECrate2017\_int\_peak = 12.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Nov-2018  
**Hardware Availability:** Apr-2017  
**Software Availability:** Mar-2018

### General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:

Power Management Policy: Custom  
Energy Performance: Performance  
DCU Streamer Prefetcher: Disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on t110is Thu Nov 1 12:15:46 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 2
  siblings     : 4
  physical 0   : cores 0 1
```

From lscpu:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            4
On-line CPU(s) list: 0-3
Thread(s) per core: 2
Core(s) per socket: 2
Socket(s):         1
NUMA node(s):     1
Vendor ID:         GenuineIntel
CPU family:        6
Model:             158
Model name:        Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
Stepping:          9
CPU MHz:           3167.636
CPU max MHz:       3500.0000
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Apr-2017

Software Availability: Mar-2018

### Platform Notes (Continued)

```

CPU min MHz:      800.0000
BogoMIPS:         7008.00
Virtualization:   VT-x
L1d cache:        32K
L1i cache:        32K
L2 cache:         256K
L3 cache:         3072K
NUMA node0 CPU(s): 0-3

```

```

Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 cx16 xtpr
pdc_m pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
lahf_lm abm 3dnowprefetch epb invpcid_single intel_pt spec_ctrl ibpb_support
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx
rdseed smap clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify
hwp_act_window hwp_epp

```

```

/proc/cpuinfo cache data
cache size : 3072 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 65475 MB
node 0 free: 63622 MB
node distances:
node 0
0: 10

```

From /proc/meminfo

```

MemTotal:      65916052 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Nov-2018  
**Hardware Availability:** Apr-2017  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux t110is 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 1 12:10
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  909G  111G  752G  13% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 5.0.3006 02/28/2018
Memory:
4x Micron 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Apr-2017

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
      541.leela_r(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 548.exchange2_r(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Apr-2017

Software Availability: Mar-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Apr-2017

Software Availability: Mar-2018

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib
-ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017\_int\_base = 11.6

Express5800/T110i-S (Intel Pentium G4560)

SPECrate2017\_int\_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2018

Hardware Availability: Apr-2017

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib  
-ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk\_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-10-31 23:15:45-0400.

Report generated on 2018-11-27 13:27:04 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.