



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro


SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

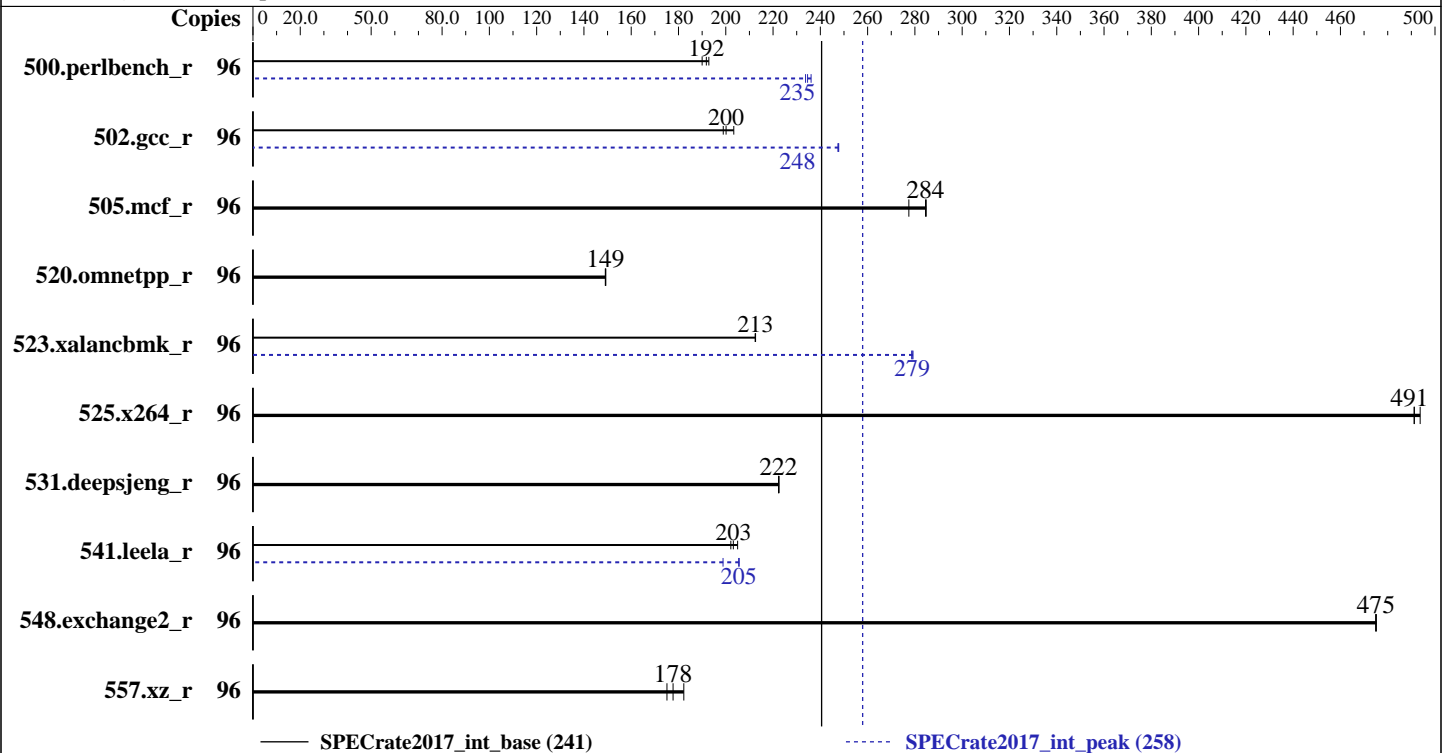

Hardware

CPU Name: Intel Xeon Platinum 8160
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 33 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 200 GB SATA III SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
 Kernel 4.4.114-94.11-default
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Supermicro BIOS version 2.1a released Aug-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	793	193	797	192	804	190	96	647	236	654	234	651	235
502.gcc_r	96	679	200	683	199	668	203	96	549	248	549	248	549	248
505.mcf_r	96	545	285	545	284	559	277	96	545	285	545	284	559	277
520.omnetpp_r	96	845	149	845	149	844	149	96	845	149	845	149	844	149
523.xalancbmk_r	96	477	213	477	212	477	213	96	363	279	364	279	364	279
525.x264_r	96	342	491	342	491	340	494	96	342	491	342	491	340	494
531.deepsjeng_r	96	494	223	495	222	495	222	96	494	223	495	222	495	222
541.leela_r	96	775	205	786	202	782	203	96	800	199	773	206	774	205
548.exchange2_r	96	529	475	530	475	529	475	96	529	475	530	475	529	475
557.xz_r	96	569	182	583	178	592	175	96	569	182	583	178	592	175

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

LLC prefetch = Enable

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Extreme Performance

Hardware P-state = Out of Band Mode

SNC = Enable

XPT Prefetch = Enable

Stale AtoS = Enable

LLC dead line alloc = Disable

IMC Interleaving = 1-way Interleave

SDDC Plus One = Disable

ADDDC Sparing = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-ima8 Mon Nov 5 15:15:38 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```

On-line CPU(s) list:    0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
Stepping:               4
CPU MHz:                2099.994
BogoMIPS:               4199.98
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               33792K
NUMA node0 CPU(s):     0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68
NUMA node1 CPU(s):     3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71
NUMA node2 CPU(s):     24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92
NUMA node3 CPU(s):     27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 33792 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68
node 0 size: 192098 MB
node 0 free: 191800 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71
node 1 size: 193525 MB
node 1 free: 193262 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92
node 2 size: 193525 MB
node 2 free: 193283 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95
node 3 size: 193522 MB
node 3 free: 193258 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10
```

```
From /proc/meminfo
MemTotal:      791216120 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-ima8 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):      Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Nov 5 14:41

```
SPEC is set to: /home/cpu2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda4       xfs       145G      4.1G  141G   3% /home
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.1a 08/23/2018

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak) 505.mcf_r(peak) 525.x264_r(peak)
557.xz_r(peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 548.exchange2_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```




SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6029U-TR4 (X11DPU , Intel Xeon Platinum 8160)

SPECrate2017_int_base = 241

SPECrate2017_int_peak = 258

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Nov-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-11-05 02:15:38-0500.

Report generated on 2018-11-27 13:34:46 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.