



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M4, Intel Celeron G4900, 3.10GHz

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

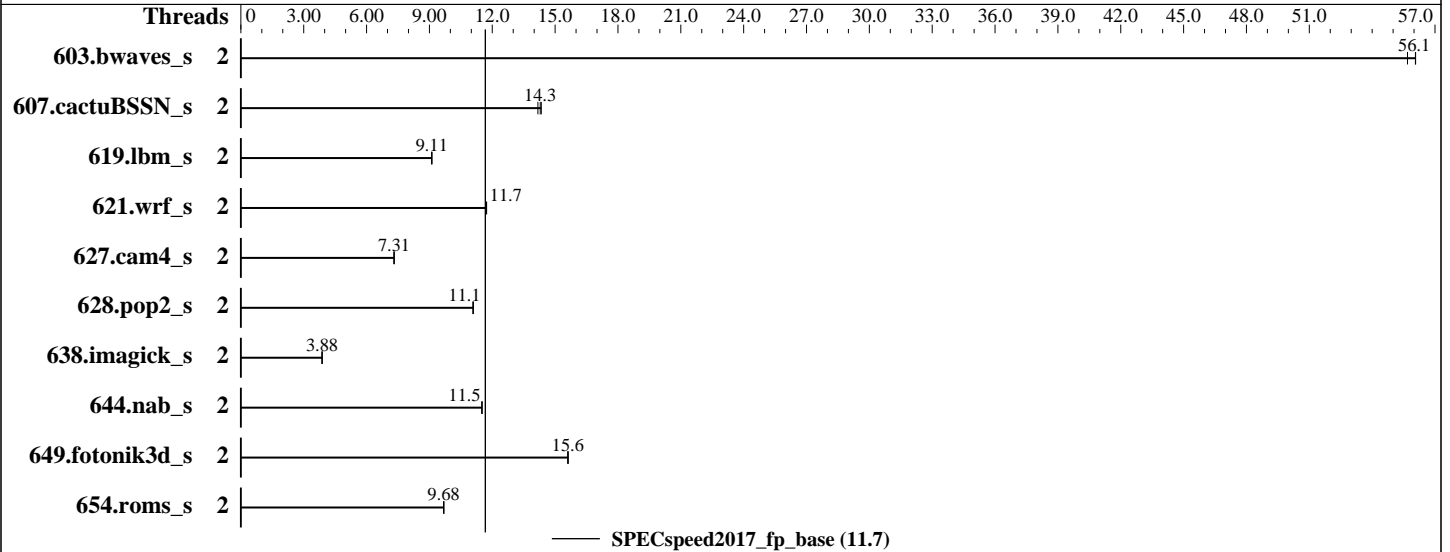

Hardware

CPU Name: Intel Celeron G4900
 Max MHz.: 3100
 Nominal: 3100
 Enabled: 2 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 2 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)
 Storage: 1 x SATA M.2 SSD, 240 GB
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)
 3.10.0-862.el7.x86_64
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Fujitsu BIOS Version V5.0.0.13 R1.4.0 for D3675-A1x. Released Nov-2018 tested as V5.0.0.13 R1.0.0 for D3675-A1x Sep-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M4, Intel Celeron G4900, 3.10GHz

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	2	1059	55.7	1052	56.1	1052	56.1							
607.cactuBSSN_s	2	1167	14.3	1176	14.2	1162	14.3							
619.lbm_s	2	575	9.11	575	9.11	575	9.12							
621.wrf_s	2	1127	11.7	1128	11.7	1129	11.7							
627.cam4_s	2	1212	7.31	1212	7.31	1211	7.32							
628.pop2_s	2	1071	11.1	1071	11.1	1070	11.1							
638.imagick_s	2	3722	3.88	3721	3.88	3718	3.88							
644.nab_s	2	1518	11.5	1518	11.5	1519	11.5							
649.fotonik3d_s	2	584	15.6	584	15.6	583	15.6							
654.roms_s	2	1624	9.69	1626	9.68	1628	9.67							

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-ic19/ic19.0-lib/intel64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Xeon E-2186G CPU + 64GB RAM memory using Red Hat Enterprise Linux Server release 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M4, Intel Celeron G4900, 3.10GHz

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Platform Notes

sysinfo program /home/Benchmark/speccpu2017-ic19/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost.localdomain Mon Nov 12 17:00:10 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Celeron(R) G4900 CPU @ 3.10GHz
1 "physical id"s (chips)
2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 2
siblings : 2
physical 0: cores 0 1

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 2
On-line CPU(s) list: 0,1
Thread(s) per core: 1
Core(s) per socket: 2
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Celeron(R) G4900 CPU @ 3.10GHz
Stepping: 11
CPU MHz: 3100.000
CPU max MHz: 3100.0000
CPU min MHz: 800.0000
BogoMIPS: 6192.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 2048K
NUMA node0 CPU(s): 0,1
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M4, Intel Celeron G4900,
3.10GHz

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Platform Notes (Continued)

```
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
lahf_lm abm 3dnowprefetch epb intel_pt tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap clflushopt xsaveopt xsavec
xgetbv1 ibpb ibrs stibp dtherm arat pln pts hwp hwp_notify hwp_act_window hwp_epp
spec_ctrl intel_stibp
```

```
/proc/cpuinfo cache data
cache size : 2048 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1
node 0 size: 65278 MB
node 0 free: 63254 MB
node distances:
node 0
0: 10
```

From /proc/meminfo

```
MemTotal: 65546392 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-862.el7.x86_64 #1 SMP Wed Mar 21 18:14:51 EDT 2018
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 12 16:46

SPEC is set to: /home/Benchmark/speccpu2017-ic19

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 150G 70G 81G 47% /home
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M4, Intel Celeron G4900, 3.10GHz

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.13 R1.0.0 for D3675-A1x
09/14/2018

Memory:

4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M4, Intel Celeron G4900,
3.10GHz

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64  
607.cactuBSSN_s: -DSPEC_LP64  
619.lbm_s: -DSPEC_LP64  
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG  
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
-assume byterecl  
638.imagick_s: -DSPEC_LP64  
644.nab_s: -DSPEC_LP64  
649.fotonik3d_s: -DSPEC_LP64  
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M4, Intel Celeron G4900, 3.10GHz

SPECspeed2017_fp_base = 11.7

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-11-12 03:00:09-0500.

Report generated on 2018-11-27 13:39:13 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.