



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55


Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

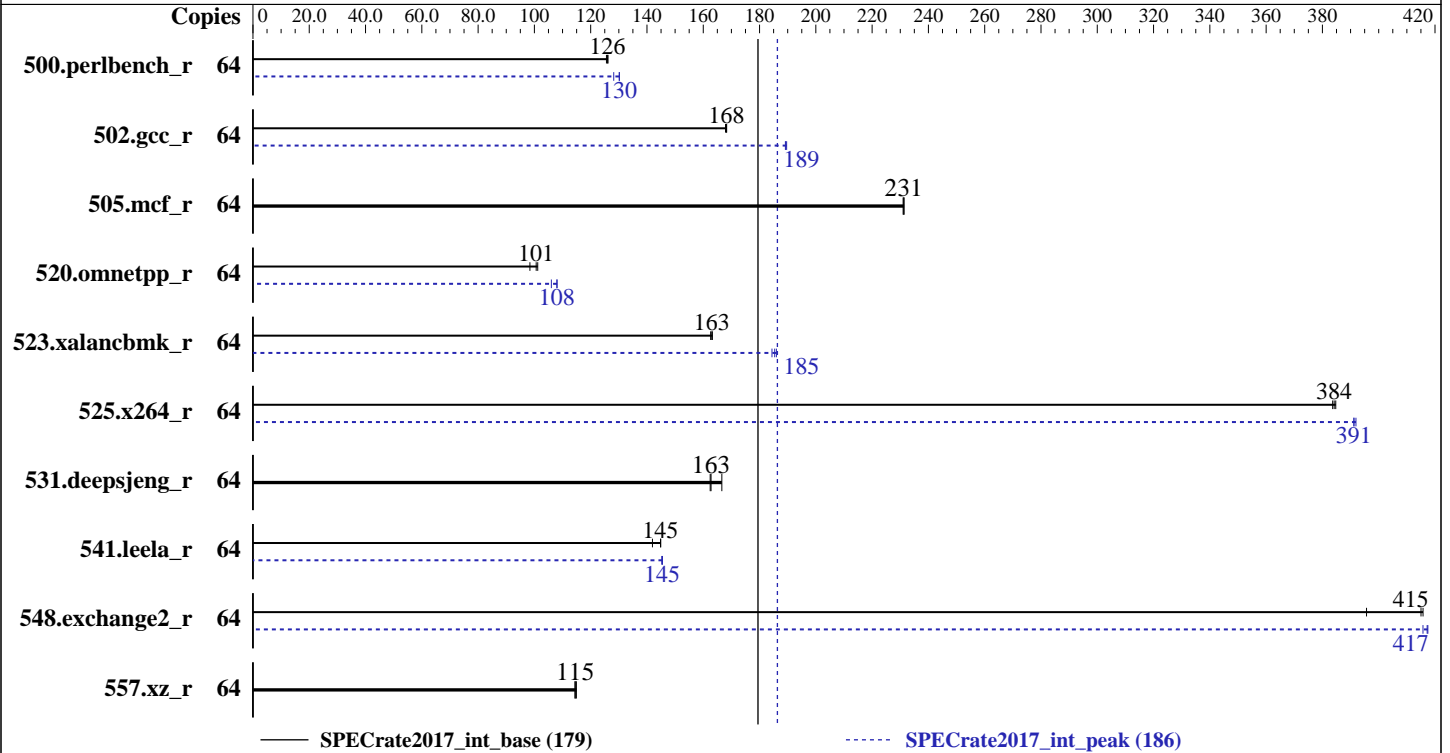

## Hardware

CPU Name: AMD EPYC 7351  
 Max MHz.: 2900  
 Nominal: 2400  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 120 GB SATA SSD  
 Other: None

## Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-45-generic  
 4.15.0-45-generic  
 Compiler: C/C++: Version 1.3.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.7.6 released Jan-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.1.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	811	126	808	126	<b>809</b>	<b>126</b>	64	795	128	<b>783</b>	<b>130</b>	783	130
502.gcc_r	64	<b>539</b>	<b>168</b>	540	168	538	168	64	<b>479</b>	<b>189</b>	479	189	478	190
505.mcf_r	64	448	231	<b>447</b>	<b>231</b>	447	231	64	448	231	<b>447</b>	<b>231</b>	447	231
520.omnetpp_r	64	853	98.4	830	101	<b>834</b>	<b>101</b>	64	777	108	<b>778</b>	<b>108</b>	792	106
523.xalancbmk_r	64	414	163	<b>415</b>	<b>163</b>	416	163	64	363	186	366	184	<b>365</b>	<b>185</b>
525.x264_r	64	<b>292</b>	<b>384</b>	292	384	291	385	64	<b>286</b>	<b>391</b>	286	391	286	392
531.deepsjeng_r	64	<b>451</b>	<b>163</b>	440	167	451	162	64	<b>451</b>	<b>163</b>	440	167	451	162
541.leela_r	64	<b>732</b>	<b>145</b>	747	142	732	145	64	728	145	<b>729</b>	<b>145</b>	730	145
548.exchange2_r	64	<b>404</b>	<b>415</b>	403	416	424	396	64	<b>402</b>	<b>417</b>	403	416	402	417
557.xz_r	64	601	115	604	114	<b>603</b>	<b>115</b>	64	601	115	604	114	<b>603</b>	<b>115</b>

SPECrate2017\_int\_base = 179

SPECrate2017\_int\_peak = 186

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here: <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
  
Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Operating System Notes (Continued)

sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5/amd1812na\_rate\_revA\_lib/64;/home/cpu2017-1.0.5/amd1812na\_rate\_revA\_lib/32:"

Binaries were compiled on a system with 2 x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,

lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB

## Platform Notes

BIOS settings:

Determinism Slider set to Power Determinism

Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on r7425 Wed Mar 6 15:37:50 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

From /proc/cpuinfo

```

model name : AMD EPYC 7351 16-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 8 9 12 13 16 17 20 21 24 25 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  1
Model name:             AMD EPYC 7351 16-Core Processor
Stepping:               2
CPU MHz:                2730.038
BogoMIPS:               4790.91
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:               512K
L3 cache:               8192K
NUMA node0 CPU(s):     0,8,16,24,32,40,48,56
NUMA node1 CPU(s):     2,10,18,26,34,42,50,58
NUMA node2 CPU(s):     4,12,20,28,36,44,52,60
NUMA node3 CPU(s):     6,14,22,30,38,46,54,62
NUMA node4 CPU(s):     1,9,17,25,33,41,49,57
NUMA node5 CPU(s):     3,11,19,27,35,43,51,59
NUMA node6 CPU(s):     5,13,21,29,37,45,53,61
NUMA node7 CPU(s):     7,15,23,31,39,47,55,63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid amd_dcm aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

osvw skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb hw\_pstate sme ssbd ibpb vmcall fsgsbase bml avx2 smep bmi2 rdseed adx smap clflushopt sha\_ni xsaveopt xsavec xgetbv1 xsaves clzero irperf xsaveerptr arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_ymSAVE\_ymload vgif overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56
node 0 size: 128638 MB
node 0 free: 128467 MB
node 1 cpus: 2 10 18 26 34 42 50 58
node 1 size: 129020 MB
node 1 free: 128880 MB
node 2 cpus: 4 12 20 28 36 44 52 60
node 2 size: 129020 MB
node 2 free: 128824 MB
node 3 cpus: 6 14 22 30 38 46 54 62
node 3 size: 129020 MB
node 3 free: 128864 MB
node 4 cpus: 1 9 17 25 33 41 49 57
node 4 size: 129020 MB
node 4 free: 128886 MB
node 5 cpus: 3 11 19 27 35 43 51 59
node 5 size: 129020 MB
node 5 free: 128869 MB
node 6 cpus: 5 13 21 29 37 45 53 61
node 6 size: 128999 MB
node 6 free: 128860 MB
node 7 cpus: 7 15 23 31 39 47 55 63
node 7 size: 124986 MB
node 7 free: 124867 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 16 16 16 32 32 32 32
 1:  16 10 16 16 32 32 32 32
 2:  16 16 10 16 32 32 32 32
 3:  16 16 16 10 32 32 32 32
 4:  32 32 32 32 10 16 16 16
 5:  32 32 32 32 16 10 16 16
 6:  32 32 32 32 16 16 10 16
 7:  32 32 32 32 16 16 16 10
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

From /proc/meminfo

MemTotal: 1052392344 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Ubuntu 18.04.2 LTS

From /etc/\*release\* /etc/\*version\*

debian\_version: buster/sid

os-release:

NAME="Ubuntu"

VERSION="18.04.2 LTS (Bionic Beaver)"

ID=ubuntu

ID\_LIKE=debian

PRETTY\_NAME="Ubuntu 18.04.2 LTS"

VERSION\_ID="18.04"

HOME\_URL="https://www.ubuntu.com/"

SUPPORT\_URL="https://help.ubuntu.com/"

uname -a:

Linux r7425 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86\_64  
x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB

run-level 5 Mar 6 15:21

SPEC is set to: /home/cpu2017-1.0.5

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda2 ext4 109G 19G 85G 19% /

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.7.6 01/14/2019

Memory:

16x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666

16x Not Specified Not Specified

(End of data from sysinfo program)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Compiler Version Notes

=====  
CC 502.gcc\_r(peak)  
-----

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
-----

=====  
CXXC 523.xalanbmk\_r(peak)  
-----

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
-----

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)  
-----

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
-----

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)  
-----

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
-----

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)  
-----

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
CXXC 541.leela\_r(peak)  
=====

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
FC 548.exchange2\_r(base, peak)  
=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lamdlibm -lpthread -ldl -ljemalloc
```

502.gcc\_r: Same as 500.perlbench\_r

505.mcf\_r: Same as 500.perlbench\_r

525.x264\_r: Same as 500.perlbench\_r

```
557.xz_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lpthread -ldl -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -lpthread -ldl -ljemalloc
```

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3(gfortran) -O3(clang)
-mavx -madox -funroll-loops -ffast-math -fpack-arrays -z muldefs
-fplugin-dragonegg.so -specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -lpthread -ldl
-ljemalloc -lgfortran -lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

```
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -fstruct-layout=3
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -lpthread
-ldl -L/root/work/lib/jemalloc510/lib32 -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mno-avx2 -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization -lamdlibm -ljemalloc
-lpthread -ldl
```

557.xz\_r: basepeak = yes

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl
-L/root/work/lib/jemalloc510/lib32 -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 179

PowerEdge R7425 (AMD EPYC 7351, 2.40GHz)

SPECrate2017\_int\_peak = 186

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mllvm -unroll-count=8 -mllvm -unroll-threshold=100
-lpthread -ldl -ljemalloc
```

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3(gfortran) -O3(clang)
-mavx -madx -funroll-loops -ffast-math -fpack-arrays
-fplugin=dragonegg.so -specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -pthread -ldl
-ljemalloc -lgfortran -lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aoccl30-flags-revA2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aoccl30-flags-revA2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-06 10:37:49-0500.

Report generated on 2019-04-02 16:54:15 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.