



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10


(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

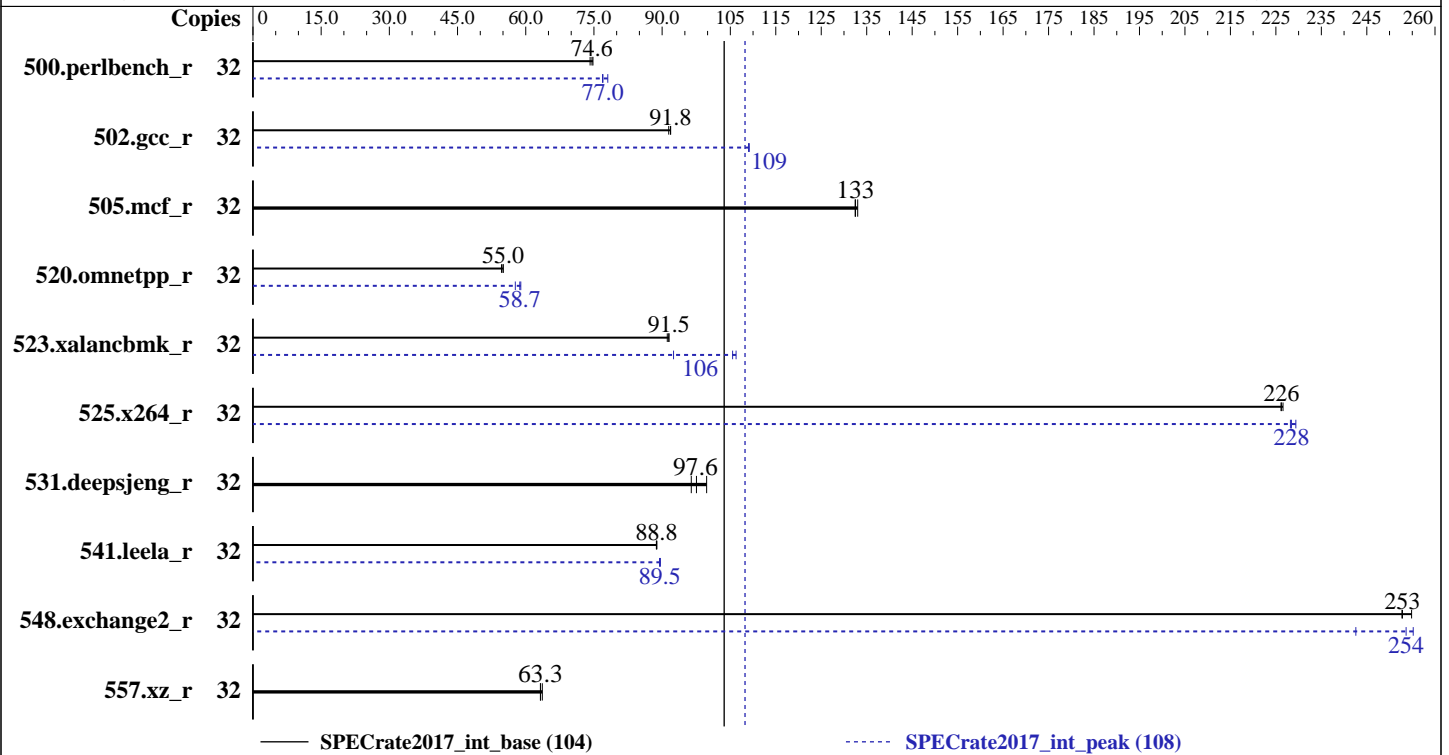

### Hardware

CPU Name: AMD EPYC 7371  
 Max MHz.: 3800  
 Nominal: 3100  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 400 GB SAS SSD RAID 0  
 Other: None

### Software

OS: SUSE linux Enterprise Server 12 (x86\_64) SP3  
 Kernel version 4.4.132-94.33-default  
 Compiler: C/C++: Version 1.3.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: HPE BIOS Version A41 10/02/2018 released Oct-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library V5.1.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	681	74.8	687	74.2	<b>683</b>	<b>74.6</b>	32	<b>662</b>	<b>77.0</b>	663	76.9	653	78.0
502.gcc_r	32	<b>493</b>	<b>91.8</b>	493	91.9	495	91.4	32	<b>415</b>	<b>109</b>	416	109	415	109
505.mcf_r	32	<b>390</b>	<b>133</b>	389	133	390	132	32	<b>390</b>	<b>133</b>	389	133	390	132
520.omnetpp_r	32	763	55.0	768	54.7	<b>763</b>	<b>55.0</b>	32	728	57.7	<b>715</b>	<b>58.7</b>	713	58.9
523.xalancbmk_r	32	<b>369</b>	<b>91.5</b>	369	91.5	371	91.1	32	<b>320</b>	<b>106</b>	318	106	365	92.5
525.x264_r	32	248	226	247	227	<b>248</b>	<b>226</b>	32	<b>245</b>	<b>228</b>	246	228	244	229
531.deepsjeng_r	32	<b>376</b>	<b>97.6</b>	367	99.8	380	96.4	32	<b>376</b>	<b>97.6</b>	367	99.8	380	96.4
541.leela_r	32	597	88.7	<b>597</b>	<b>88.8</b>	597	88.8	32	<b>592</b>	<b>89.5</b>	593	89.4	591	89.6
548.exchange2_r	32	329	255	<b>332</b>	<b>253</b>	332	253	32	329	255	<b>331</b>	<b>254</b>	346	243
557.xz_r	32	<b>546</b>	<b>63.3</b>	543	63.6	547	63.2	32	<b>546</b>	<b>63.3</b>	543	63.6	547	63.2

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/amd1812na\_rate\_revA\_lib/64;/home/cpu2017/amd1812na\_rate\_revA\_lib/32:"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

Performance Determinism set to Power Deterministic

Workload Power and Utilization Monitoring set to Disabled

Minimum Processor Idle Power core C-State set to C6 State

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Platform Notes (Continued)

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-qlr8 Tue Feb 5 11:54:39 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7371 16-Core Processor

1 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 1

NUMA node(s): 4

Vendor ID: AuthenticAMD

CPU family: 23

Model: 1

Model name: AMD EPYC 7371 16-Core Processor

Stepping: 2

CPU MHz: 3100.000

CPU max MHz: 3100.0000

CPU min MHz: 2500.0000

BogoMIPS: 6188.22

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 64K

L2 cache: 512K

L3 cache: 8192K

NUMA node0 CPU(s): 0-3,16-19

NUMA node1 CPU(s): 4-7,20-23

NUMA node2 CPU(s): 8-11,24-27

NUMA node3 CPU(s): 12-15,28-31

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Platform Notes (Continued)

```

pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate ssbd retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero
irperf ibpb overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 16 17 18 19
node 0 size: 128841 MB
node 0 free: 128664 MB
node 1 cpus: 4 5 6 7 20 21 22 23
node 1 size: 129022 MB
node 1 free: 128844 MB
node 2 cpus: 8 9 10 11 24 25 26 27
node 2 size: 129022 MB
node 2 free: 128864 MB
node 3 cpus: 12 13 14 15 28 29 30 31
node 3 size: 129021 MB
node 3 free: 128856 MB
node distances:
node  0  1  2  3
0:  10 16 16 16
1:  16 10 16 16
2:  16 16 10 16
3:  16 16 16 10

```

```

From /proc/meminfo
MemTotal:      528289016 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

## Platform Notes (Continued)

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"  
VERSION="12-SP3"  
VERSION\_ID="12.3"  
PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"  
ID="sles"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-qlr8 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

run-level 3 Feb 5 11:53 last=5

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	4.4G	326G	2%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A41 10/02/2018

Memory:

8x UNKNOWN NOT AVAILABLE  
8x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 502.gcc\_r(peak)  
-----

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
CXXC 523.xalancbmk\_r(peak)

-----  
AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

-----  
AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)

-----  
AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)

-----  
AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

## Compiler Version Notes (Continued)

=====  
CXXC 541.leela\_r(peak)  
-----

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

## Base Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lamdlibm -lpthread -ldl -ljemalloc
```

502.gcc\_r: Same as 500.perlbench\_r

505.mcf\_r: Same as 500.perlbench\_r

525.x264\_r: Same as 500.perlbench\_r

```
557.xz_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -function-specialize
-z muldefs -lpthread -ldl -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -march=znver1
-mllvm -unroll-threshold=100 -finline-aggressive -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compares=false
-z muldefs -lpthread -ldl -ljemalloc
```

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -mavx -madox
-funroll-loops -ffast-math -fpack-arrays -z muldefs
-fplugin=dragonegg.so -specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -lpthread -ldl
-ljemalloc -lgfortran -lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -fstruct-layout=3
-mllvm -vectorize-memory-aggressively -mno-avx2
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -fgnu89-inline -lpthread
-ldl -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mno-avx2 -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-flv-function-specialization -lamdlibm -ljemalloc
-lpthread -ldl
```

557.xz\_r: basepeak = yes

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -Ofast
-march=znver1 -finline-aggressive
-mllvm -unroll-threshold=100 -fremap-arrays
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-mllvm -unroll-count=8 -mllvm -unroll-threshold=100
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(3.10 GHz, AMD EPYC 7371)

SPECrate2017\_int\_base = 104

SPECrate2017\_int\_peak = 108

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Peak Optimization Flags (Continued)

541.leela\_r (continued):

`-lpthread -ldl -ljemalloc`

Fortran benchmarks:

```
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-merge-constant
-Wl,-mllvm -Wl,-unroll-aggressive -Wl,-mllvm -Wl,-unroll-threshold=150
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-enable-vectorize-compares -O3 -mavx -madox
-funroll-loops -ffast-math -fpack-arrays -fplugin=dragonegg.so
-specs=integrated-as.specs
-fplugin-arg-dragonegg-llvm-option=-disable-indvar-simplify
-fplugin-arg-dragonegg-llvm-option=-unroll-aggressive
-fplugin-arg-dragonegg-llvm-option=-unroll-threshold:150 -lpthread -ldl
-ljemalloc -lgfortran -lamdlibm
```

## Peak Other Flags

C benchmarks:

502.gcc\_r: `-L/root/work/lib/jemalloc510/lib32`

C++ benchmarks:

523.xalancbmk\_r: `-L/root/work/lib/jemalloc510/lib32`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.html>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.xml>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-02-05 12:54:38-0500.

Report generated on 2019-04-03 17:24:04 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-03.