



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

## Huawei 5885H V5 (Intel Xeon Gold 6252)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

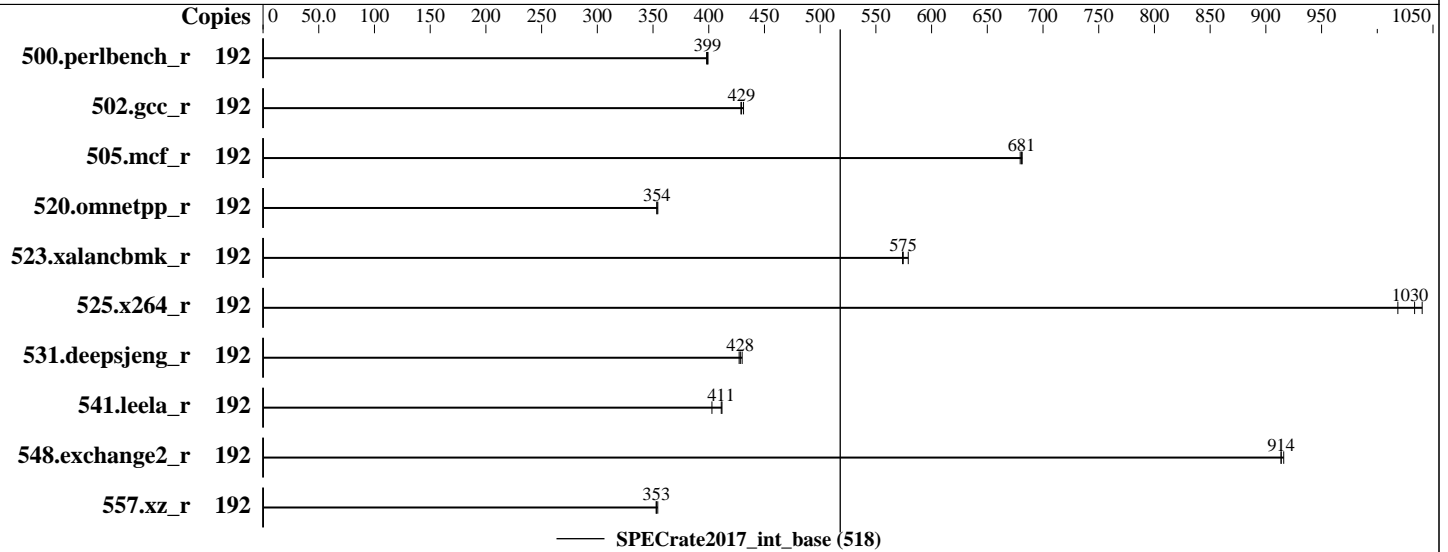

### Hardware

CPU Name: Intel Xeon Gold 6252  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 1Rx4 PC4-2933Y-R)  
 Storage: 1 x 1TB SATA HDD 10K RPM, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4  
 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Version 6.20 released Feb-2019  
 File System: btrfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

**Huawei 5885H V5 (Intel Xeon Gold 6252)**

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	<b>766</b>	<b>399</b>	765	399	768	398							
502.gcc_r	192	630	431	634	429	<b>633</b>	<b>429</b>							
505.mcf_r	192	<b>456</b>	<b>681</b>	457	680	455	681							
520.omnetpp_r	192	713	353	711	354	<b>712</b>	<b>354</b>							
523.xalancbmk_r	192	<b>353</b>	<b>575</b>	350	579	353	574							
525.x264_r	192	<b>325</b>	<b>1030</b>	330	1020	323	1040							
531.deepsjeng_r	192	512	430	515	427	<b>514</b>	<b>428</b>							
541.leela_r	192	789	403	772	412	<b>773</b>	<b>411</b>							
548.exchange2_r	192	549	916	<b>551</b>	<b>914</b>	551	914							
557.xz_r	192	<b>587</b>	<b>353</b>	588	353	585	354							

SPECrate2017\_int\_base = 518

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

**Huawei 5885H V5 (Intel Xeon Gold 6252)**

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3175

**Test Sponsor:** Huawei

**Tested by:** Huawei

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Extended Prediction Table (XPT) Prefetch set to Enable

Memory Patrol Scrub set to Disable

Last Level Cache (LLC) Prefetch set to Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-t60c Wed Feb 27 22:58:48 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

On-line CPU(s) list: 0-191

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 4

NUMA node(s): 8

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

**Huawei 5885H V5 (Intel Xeon Gold 6252)**

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Platform Notes (Continued)

```
Stepping: 6
CPU MHz: 2100.000
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,96-99,103-105,109-111,115,116
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,100-102,106-108,112-114,117-119
NUMA node2 CPU(s): 24-27,31-33,37-39,43,44,120-123,127-129,133-135,139,140
NUMA node3 CPU(s): 28-30,34-36,40-42,45-47,124-126,130-132,136-138,141-143
NUMA node4 CPU(s): 48-51,55-57,61-63,67,68,144-147,151-153,157-159,163,164
NUMA node5 CPU(s): 52-54,58-60,64-66,69-71,148-150,154-156,160-162,165-167
NUMA node6 CPU(s): 72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s): 76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 96 97 98 99 103 104 105 109 110 111 115 116
node 0 size: 95195 MB
node 0 free: 93486 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 100 101 102 106 107 108 112 113 114 117
118 119
node 1 size: 96753 MB
node 1 free: 96076 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 120 121 122 123 127 128 129 133 134
135 139 140
node 2 size: 96753 MB
node 2 free: 96037 MB
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

**Huawei 5885H V5 (Intel Xeon Gold 6252)**

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3175

**Test Sponsor:** Huawei

**Tested by:** Huawei

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Platform Notes (Continued)

```

node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 124 125 126 130 131 132 136 137 138
141 142 143
node 3 size: 96753 MB
node 3 free: 96171 MB
node 4 cpus: 48 49 50 51 55 56 57 61 62 63 67 68 144 145 146 147 151 152 153 157 158
159 163 164
node 4 size: 96753 MB
node 4 free: 96198 MB
node 5 cpus: 52 53 54 58 59 60 64 65 66 69 70 71 148 149 150 154 155 156 160 161 162
165 166 167
node 5 size: 96724 MB
node 5 free: 96167 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 96753 MB
node 6 free: 96177 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 96525 MB
node 7 free: 95931 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  21  21  21  21
  1:  11  10  21  21  21  21  21  21
  2:  21  21  10  11  21  21  21  21
  3:  21  21  11  10  21  21  21  21
  4:  21  21  21  21  10  11  21  21
  5:  21  21  21  21  11  10  21  21
  6:  21  21  21  21  21  21  10  11
  7:  21  21  21  21  21  21  11  10

```

From /proc/meminfo

MemTotal: 790743628 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP4

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 4

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

**Huawei 5885H V5 (Intel Xeon Gold 6252)**

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Platform Notes (Continued)

```

NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

```

uname -a:

```

Linux linux-t60c 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Feb 27 17:57

SPEC is set to: /home/cpu2017

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda4        btrfs    805G   27G  776G   4% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 6.20 2019/02/01

Memory:

48x Samsung M393A2K40CB2-CVF 16 GB 1 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

```

```

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

**Huawei 5885H V5 (Intel Xeon Gold 6252)**

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Feb-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Compiler Version Notes (Continued)

FC 548.exchange2\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Huawei)

SPECrate2017\_int\_base = 518

**Huawei 5885H V5 (Intel Xeon Gold 6252)**

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3175

**Test Sponsor:** Huawei

**Tested by:** Huawei

**Test Date:** Feb-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Dec-2018

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2019-02-27 09:58:47-0500.

Report generated on 2019-05-15 13:18:53 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.