



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECSpeed2017_int_peak = 10.6

CPU2017 License: 55


Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

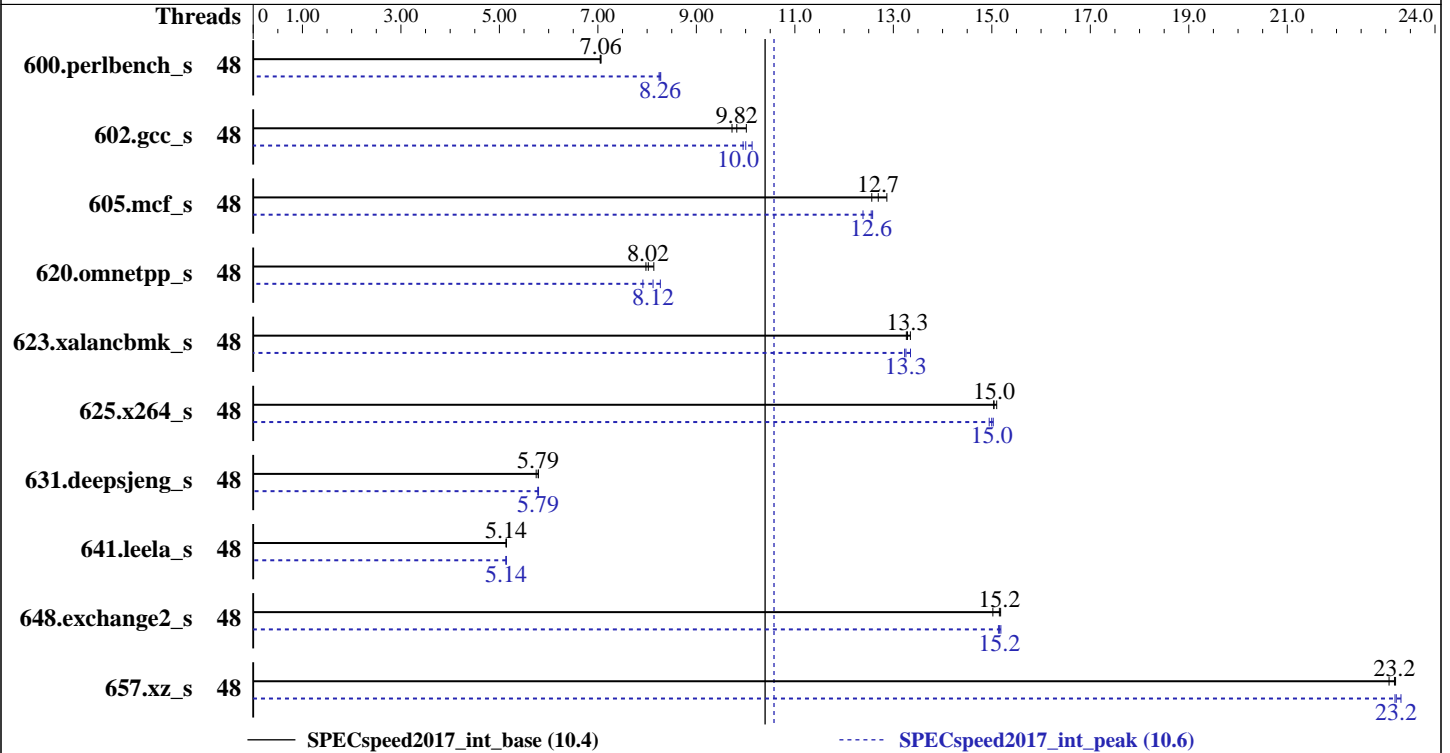

Hardware

CPU Name: Intel Xeon Gold 6246
 Max MHz.: 4200
 Nominal: 3300
 Enabled: 48 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Ubuntu 18.04.2 LTS
 kernel 4.15.0-45-generic
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: Yes
 Firmware: Version 2.2.9 released May-2019
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	251	7.06	<u>252</u>	<u>7.06</u>	252	7.05	48	<u>215</u>	<u>8.26</u>	214	8.28	215	8.24
602.gcc_s	48	<u>405</u>	<u>9.82</u>	398	10.0	410	9.72	48	400	9.95	393	10.1	<u>398</u>	<u>10.0</u>
605.mcf_s	48	376	12.6	367	12.9	<u>372</u>	<u>12.7</u>	48	381	12.4	<u>376</u>	<u>12.6</u>	375	12.6
620.omnetpp_s	48	204	7.98	200	8.14	<u>203</u>	<u>8.02</u>	48	<u>201</u>	<u>8.12</u>	197	8.27	206	7.91
623.xalancbmk_s	48	<u>107</u>	<u>13.3</u>	106	13.3	107	13.3	48	107	13.2	106	13.3	<u>107</u>	<u>13.3</u>
625.x264_s	48	117	15.1	<u>117</u>	<u>15.0</u>	117	15.0	48	118	14.9	117	15.0	<u>118</u>	<u>15.0</u>
631.deepsjeng_s	48	247	5.79	249	5.75	<u>248</u>	<u>5.79</u>	48	247	5.79	<u>248</u>	<u>5.79</u>	248	5.78
641.leela_s	48	332	5.14	<u>332</u>	<u>5.14</u>	332	5.14	48	<u>332</u>	<u>5.14</u>	332	5.14	332	5.14
648.exchange2_s	48	196	15.0	194	15.2	<u>194</u>	<u>15.2</u>	48	194	15.1	<u>194</u>	<u>15.2</u>	194	15.2
657.xz_s	48	<u>267</u>	<u>23.2</u>	266	23.2	268	23.1	48	<u>266</u>	<u>23.2</u>	265	23.3	267	23.2

SPECspeed2017_int_base = 10.4

SPECspeed2017_int_peak = 10.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

ADDDC setting disabled
Sub NUMA Cluster enabled
Virtualization Technology disabled
DCU Streamer Prefetcher enabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
ClE disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor disabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on intel-sut Wed May 29 18:17:32 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6246 CPU @ 3.30GHz
 4 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 12
physical 0: cores 1 2 3 4 8 9 10 11 17 18 25 27
physical 1: cores 0 2 3 4 8 9 10 11 17 18 25 27
physical 2: cores 0 2 4 8 9 10 17 18 19 20 25 27
physical 3: cores 0 2 4 8 9 10 11 17 18 19 25 27
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```

CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 1
Core(s) per socket: 12
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6246 CPU @ 3.30GHz
Stepping: 7
CPU MHz: 3853.613
BogoMIPS: 6600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 95127 MB
node 0 free: 94885 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 96765 MB
node 1 free: 96531 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46

```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```
node 2 size: 96765 MB
node 2 free: 96562 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 96764 MB
node 3 free: 96488 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10
```

```
From /proc/meminfo
MemTotal: 394673368 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 3 May 29 18:15

```
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 439G 19G 398G 5% /
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.9 05/08/2019

Memory:

19x 00AD00B300AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933

5x 00AD063200AD HMA82GR7CJR8N-WM 16 GB 2 rank 2933

24x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base, peak) 657.xz_s(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 648.exchange2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP

-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Peak Optimization Flags (Continued)

602.gcc_s (continued):

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2

```
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
```

```
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
```

```
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-DSPEC_SUPPRESS_OPENMP
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

623.xalancbmk_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

631.deepsjeng_s: Same as 623.xalancbmk_s

641.leela_s: Same as 623.xalancbmk_s

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_int_base = 10.4

PowerEdge MX840c (Intel Xeon Gold 6246, 3.30GHz)

SPECspeed2017_int_peak = 10.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-29 14:17:31-0400.

Report generated on 2019-07-09 15:51:23 by CPU2017 PDF formatter v6067.

Originally published on 2019-07-09.