



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55


Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

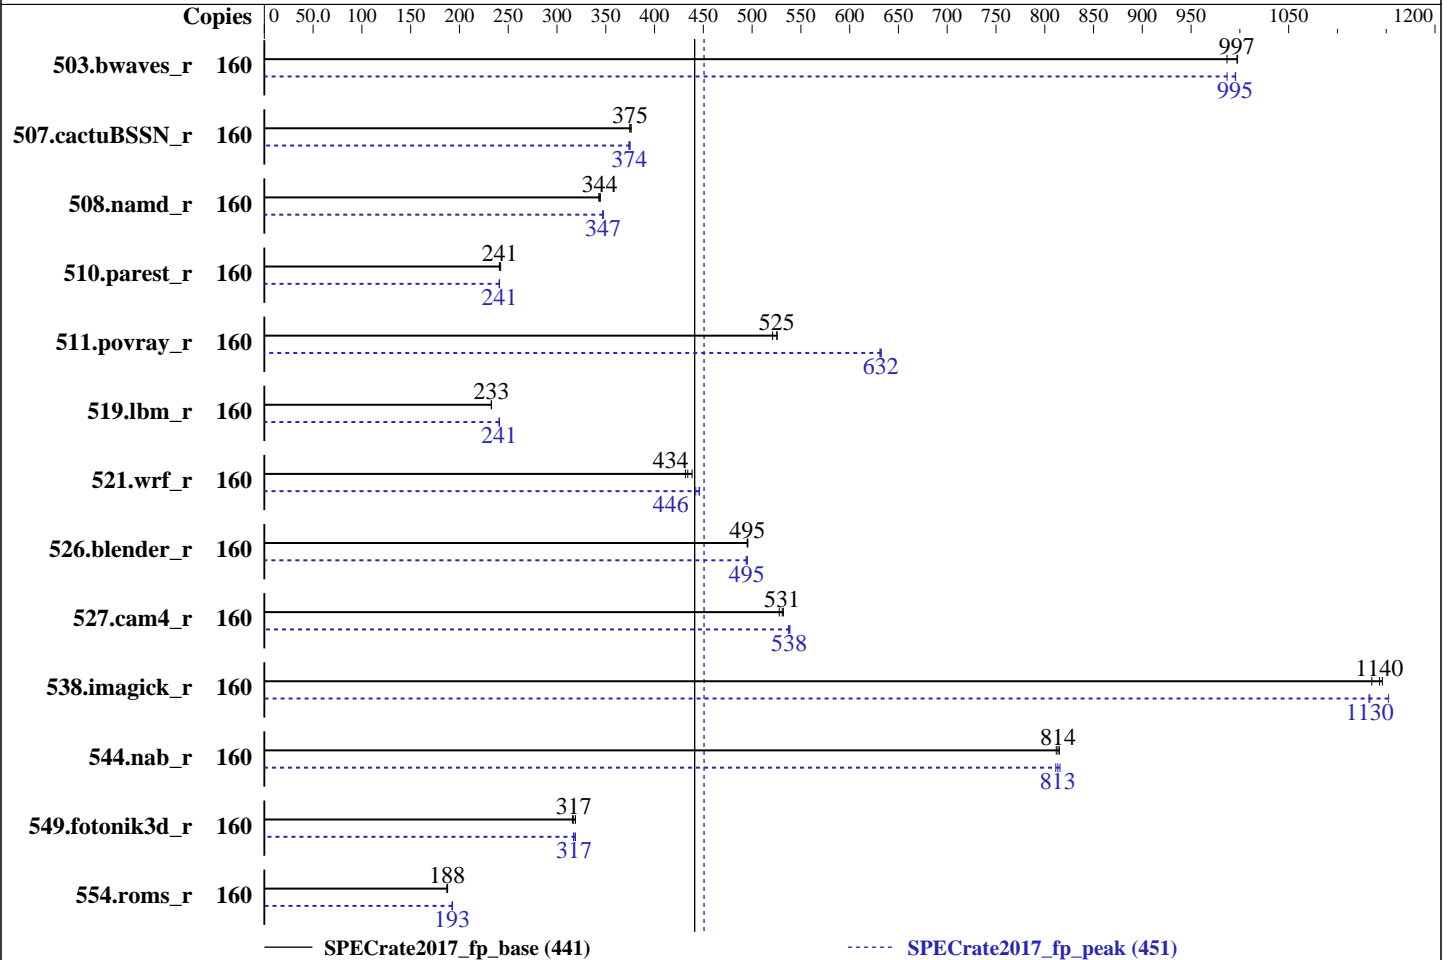

### Hardware

CPU Name: Intel Xeon Gold 6248  
 Max MHz.: 3900  
 Nominal: 2500  
 Enabled: 80 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-45-generic  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.2.9 released May-2019  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	1608	998	1626	987	<b>1609</b>	<b>997</b>	160	1612	996	<b>1612</b>	<b>995</b>	1626	987
507.cactuBSSN_r	160	<b>540</b>	<b>375</b>	541	375	539	376	160	<b>541</b>	<b>374</b>	540	375	542	374
508.namd_r	160	443	343	441	344	<b>442</b>	<b>344</b>	160	438	347	437	347	<b>438</b>	<b>347</b>
510.parest_r	160	1737	241	<b>1734</b>	<b>241</b>	1728	242	160	1738	241	1736	241	<b>1737</b>	<b>241</b>
511.povray_r	160	711	526	<b>711</b>	<b>525</b>	717	521	160	<b>591</b>	<b>632</b>	591	632	592	631
519.lbm_r	160	724	233	<b>724</b>	<b>233</b>	725	233	160	700	241	701	241	<b>700</b>	<b>241</b>
521.wrf_r	160	817	438	<b>826</b>	<b>434</b>	830	432	160	803	446	<b>804</b>	<b>446</b>	810	442
526.blender_r	160	492	496	492	495	<b>492</b>	<b>495</b>	160	493	494	<b>493</b>	<b>495</b>	492	495
527.cam4_r	160	530	528	<b>527</b>	<b>531</b>	526	532	160	521	537	519	539	<b>520</b>	<b>538</b>
538.imagick_r	160	351	1140	<b>348</b>	<b>1140</b>	347	1150	160	345	1150	351	1130	<b>351</b>	<b>1130</b>
544.nab_r	160	<b>331</b>	<b>814</b>	330	815	332	812	160	330	816	332	811	<b>331</b>	<b>813</b>
549.fotonik3d_r	160	1974	316	<b>1966</b>	<b>317</b>	1955	319	160	1955	319	1967	317	<b>1964</b>	<b>317</b>
554.roms_r	160	<b>1355</b>	<b>188</b>	1359	187	1353	188	160	<b>1320</b>	<b>193</b>	1321	192	1318	193

SPECrate2017\_fp\_base = 441

SPECrate2017\_fp\_peak = 451

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Platform Notes

BIOS settings:

ADDDC setting disabled  
 Virtualization Technology disabled  
 DCU Streamer Prefetcher disabled  
 System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to Autonomous  
 C1E disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance  
 Memory Patrol Scrub disabled  
 Logical Processor enabled  
 CPU Interconnect Bus Link Power Management disabled  
 PCI ASPM L1 Link Power Management disabled  
 Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
 running on intel-sut Tue Jul 30 03:57:07 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
 4 "physical id"s (chips)
 160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

```

From lscpu:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 160
On-line CPU(s) list: 0-159
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jul-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## Platform Notes (Continued)

Model: 85  
Model name: Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz  
Stepping: 6  
CPU MHz: 2086.546  
BogoMIPS: 5000.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 28160K

NUMA node0 CPU(s):  
0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136, 144, 152  
NUMA node1 CPU(s):  
1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121, 129, 137, 145, 153  
NUMA node2 CPU(s):  
2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154  
NUMA node3 CPU(s):  
3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123, 131, 139, 147, 155  
NUMA node4 CPU(s):  
4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140, 148, 156  
NUMA node5 CPU(s):  
5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125, 133, 141, 149, 157  
NUMA node6 CPU(s):  
6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126, 134, 142, 150, 158  
NUMA node7 CPU(s):  
7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 103, 111, 119, 127, 135, 143, 151, 159

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid  
aperfmpperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand  
lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single intel\_ppin  
ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid  
fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f  
avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl  
xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local  
dtherm ida arat pln pts pku ospke avx512\_vnni flush\_lld arch\_capabilities

/proc/cpuinfo cache data  
cache size : 28160 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a  
physical chip.  
available: 8 nodes (0-7)  
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152  
node 0 size: 95146 MB  
node 0 free: 94722 MB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

## Platform Notes (Continued)

```

node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153
node 1 size: 96764 MB
node 1 free: 96362 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154
node 2 size: 96764 MB
node 2 free: 96365 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155
node 3 size: 96764 MB
node 3 free: 96346 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156
node 4 size: 96764 MB
node 4 free: 96371 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157
node 5 size: 96764 MB
node 5 free: 96133 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158
node 6 size: 96764 MB
node 6 free: 96302 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159
node 7 size: 96741 MB
node 7 free: 96324 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  21  21  21  11  21  21  21
 1:  21  10  21  21  21  11  21  21
 2:  21  21  10  21  21  21  11  21
 3:  21  21  21  10  21  21  21  11
 4:  11  21  21  21  10  21  21  21
 5:  21  11  21  21  21  10  21  21
 6:  21  21  11  21  21  21  10  21
 7:  21  21  21  11  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      791013084 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
ID=ubuntu
ID_LIKE=debian

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Platform Notes (Continued)

```
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

```
run-level 3 Jul 29 19:19
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G   31G  386G   8% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 2.2.9 05/08/2019
Memory:
16x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
8x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
24x Not Specified Not Specified
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 519.lbm_r(peak)
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 CXXC 508.namd\_r(base) 510.parest\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 CXXC 508.namd\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 CC 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 CC 511.povray\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 FC 507.cactuBSSN\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
 FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)  
 -----  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 -----

=====  
 FC 554.roms\_r(peak)  
 -----  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 -----

=====  
 CC 521.wrf\_r(base) 527.cam4\_r(base)  
 -----  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 -----

=====  
 CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
 -----  
 Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
 64, Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
 Version 19.0.4.227 Build 20190416  
 Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
 -----





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
```

```
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
```

```
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
```

```
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

508.namd\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

510.parest\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nonstandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nonstandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nonstandard-realloc-lhs  
-align array32byte

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 441

PowerEdge MX840c (Intel Xeon Gold 6248, 2.50GHz)

SPECrate2017\_fp\_peak = 451

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-07-29 23:57:06-0400.

Report generated on 2019-08-21 12:05:16 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.