



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_base = 481

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2019

Hardware Availability: Jul-2019

Software Availability: May-2019

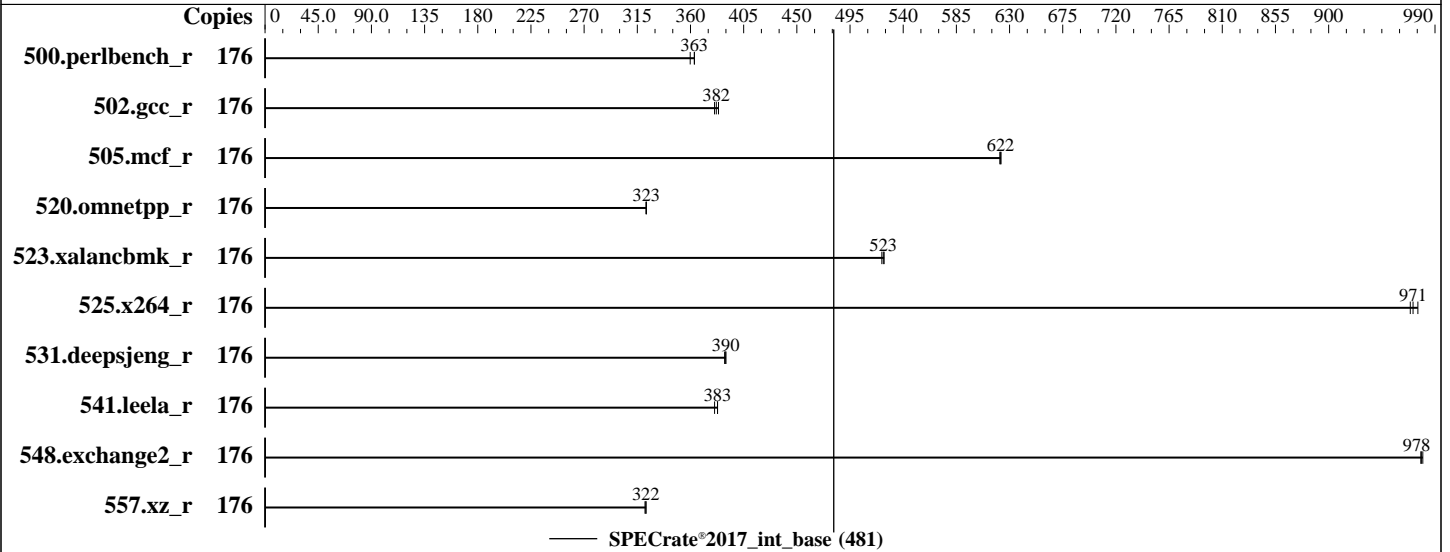

### Hardware

CPU Name: Intel Xeon Gold 6238  
 Max MHz: 3700  
 Nominal: 2100  
 Enabled: 88 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 30.25 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 800 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 Kernel 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TEE142E 2.30 released Aug-2019  
 tested as TEE141E 2.30 Jul-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_base = 481

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Aug-2019  
Hardware Availability: Jul-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	176	779	360	<b><u>771</u></b>	<b><u>363</u></b>	771	363							
502.gcc_r	176	649	384	655	380	<b><u>653</u></b>	<b><u>382</u></b>							
505.mcf_r	176	457	622	457	623	<b><u>457</u></b>	<b><u>622</u></b>							
520.omnetpp_r	176	716	323	<b><u>716</u></b>	<b><u>323</u></b>	716	322							
523.xalancbmk_r	176	<b><u>355</u></b>	<b><u>523</u></b>	355	524	356	522							
525.x264_r	176	<b><u>317</u></b>	<b><u>971</u></b>	316	976	318	969							
531.deepsjeng_r	176	<b><u>517</u></b>	<b><u>390</u></b>	517	390	519	389							
541.leela_r	176	761	383	<b><u>761</u></b>	<b><u>383</u></b>	766	380							
548.exchange2_r	176	<b><u>471</u></b>	<b><u>978</u></b>	471	978	471	980							
557.xz_r	176	591	322	<b><u>590</u></b>	<b><u>322</u></b>	590	322							

SPECrate®2017\_int\_base = 481

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 481

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2019  
**Hardware Availability:** Jul-2019  
**Software Availability:** May-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
DCU Streamer Prefetcher set to Disable  
SNC set to Enable  
Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-9o83 Mon Aug 26 18:16:36 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
 4 "physical id"s (chips)
176 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 22
siblings  : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 176
On-line CPU(s) list:   0-175
Thread(s) per core:    2
Core(s) per socket:    22
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 481

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2100.000
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 30976K
NUMA node0 CPU(s): 0-2,6-8,11-13,17,18,88-90,94-96,99-101,105,106
NUMA node1 CPU(s): 3-5,9,10,14-16,19-21,91-93,97,98,102-104,107-109
NUMA node2 CPU(s): 22-24,28-30,33-35,39,40,110-112,116-118,121-123,127,128
NUMA node3 CPU(s): 25-27,31,32,36-38,41-43,113-115,119,120,124-126,129-131
NUMA node4 CPU(s): 44-46,50-52,55-57,61,62,132-134,138-140,143-145,149,150
NUMA node5 CPU(s): 47-49,53,54,58-60,63-65,135-137,141,142,146-148,151-153
NUMA node6 CPU(s): 66-68,72-74,77-79,83,84,154-156,160-162,165-167,171,172
NUMA node7 CPU(s): 69-71,75,76,80-82,85-87,157-159,163,164,168-170,173-175
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 30976 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 11 12 13 17 18 88 89 90 94 95 96 99 100 101 105 106
node 0 size: 193130 MB
node 0 free: 192480 MB
node 1 cpus: 3 4 5 9 10 14 15 16 19 20 21 91 92 93 97 98 102 103 104 107 108 109
node 1 size: 193526 MB
node 1 free: 193240 MB
node 2 cpus: 22 23 24 28 29 30 33 34 35 39 40 110 111 112 116 117 118 121 122 123 127
128
node 2 size: 193526 MB
node 2 free: 193318 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 481

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Aug-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2019

### Platform Notes (Continued)

```

node 3 cpus: 25 26 27 31 32 36 37 38 41 42 43 113 114 115 119 120 124 125 126 129 130
131
node 3 size: 193526 MB
node 3 free: 193302 MB
node 4 cpus: 44 45 46 50 51 52 55 56 57 61 62 132 133 134 138 139 140 143 144 145 149
150
node 4 size: 193497 MB
node 4 free: 193290 MB
node 5 cpus: 47 48 49 53 54 58 59 60 63 64 65 135 136 137 141 142 146 147 148 151 152
153
node 5 size: 193526 MB
node 5 free: 193307 MB
node 6 cpus: 66 67 68 72 73 74 77 78 79 83 84 154 155 156 160 161 162 165 166 167 171
172
node 6 size: 193526 MB
node 6 free: 193336 MB
node 7 cpus: 69 70 71 75 76 80 81 82 85 86 87 157 158 159 163 164 168 169 170 173 174
175
node 7 size: 193523 MB
node 7 free: 193337 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 21 21 21 21 31 31
1:  11 10 21 21 21 21 31 31
2:  21 21 10 11 31 31 21 21
3:  21 21 11 10 31 31 21 21
4:  21 21 31 31 10 11 21 21
5:  21 21 31 31 11 10 21 21
6:  31 31 21 21 21 21 10 11
7:  31 31 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      1584932212 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 481

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2019  
**Hardware Availability:** Jul-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Aug 26 18:14
```

```
SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 744G 134G 609G 19% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[TEE141E-2.30]- 07/02/2019
Memory:
48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_base = 481

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2019

**Hardware Availability:** Jul-2019

**Software Availability:** May-2019

## Compiler Version Notes (Continued)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6238)

SPECrate®2017\_int\_base = 481

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2019

**Hardware Availability:** Jul-2019

**Software Availability:** May-2019

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-26 06:16:36-0400.

Report generated on 2019-09-17 16:17:02 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.