



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS


BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

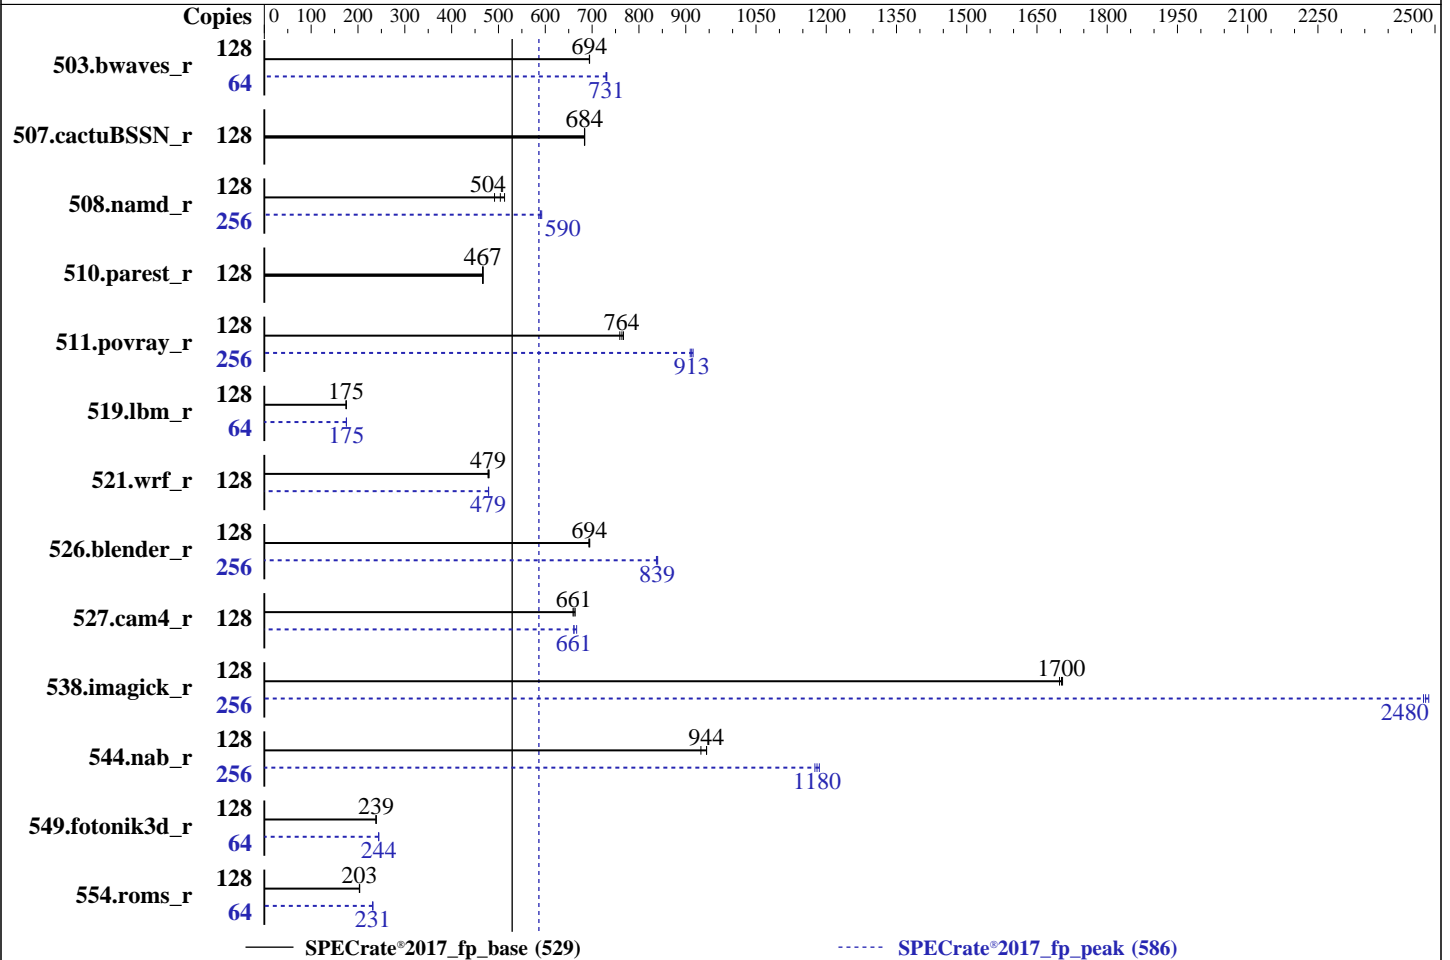

Hardware

CPU Name: AMD EPYC 7H12
 Max MHz: 3300
 Nominal: 2600
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200V-L)
 Storage: 512 GB tmpfs
 Other: None

Software

OS: RHEL 8.0
 kernel version 4.18.0-80.4.2.el8_0.x86_64
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version RME090.10.11.001 released Jul-2019
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator library v5.2.0
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1848	695	<u>1849</u>	<u>694</u>	1849	694	64	877	731	<u>878</u>	<u>731</u>	880	730
507.cactuBSSN_r	128	<u>237</u>	<u>684</u>	237	684	237	684	128	<u>237</u>	<u>684</u>	237	684	237	684
508.namd_r	128	247	492	<u>241</u>	<u>504</u>	237	513	256	<u>412</u>	<u>590</u>	413	589	411	592
510.parest_r	128	719	466	<u>717</u>	<u>467</u>	717	467	128	719	466	<u>717</u>	<u>467</u>	717	467
511.povray_r	128	394	759	<u>391</u>	<u>764</u>	390	767	256	<u>655</u>	<u>913</u>	657	910	653	916
519.lbm_r	128	<u>772</u>	<u>175</u>	772	175	771	175	64	385	175	<u>385</u>	<u>175</u>	385	175
521.wrf_r	128	597	480	600	478	<u>599</u>	<u>479</u>	128	599	479	<u>599</u>	<u>479</u>	599	479
526.blender_r	128	<u>281</u>	<u>694</u>	281	695	281	693	256	<u>465</u>	<u>839</u>	464	840	466	837
527.cam4_r	128	340	659	337	664	<u>339</u>	<u>661</u>	128	<u>339</u>	<u>661</u>	336	667	339	661
538.imagick_r	128	187	1700	187	1700	<u>187</u>	<u>1700</u>	256	<u>257</u>	<u>2480</u>	256	2490	257	2480
544.nab_r	128	231	932	<u>228</u>	<u>944</u>	228	944	256	366	1180	<u>365</u>	<u>1180</u>	364	1190
549.fotonik3d_r	128	2090	239	2089	239	<u>2089</u>	<u>239</u>	64	1022	244	1021	244	<u>1021</u>	<u>244</u>
554.roms_r	128	1002	203	999	204	<u>1000</u>	<u>203</u>	64	439	232	<u>439</u>	<u>231</u>	440	231

SPECrate®2017_fp_base = **529**

SPECrate®2017_fp_peak = **586**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Tmpfs filesystem can be set with:
mount -t tmpfs -o size=512g tmpfs /dev/shm
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/dev/shm/WORKDIR/pml-nod22/specCPU2017_1.1/amd_rate_aocc200_rome_C_lib/
64:/dev/shm/WORKDIR/pml-nod22/specCPU2017_1.1/amd_rate_aocc200_rome_C_li
b/32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc configured and built with GCC v7.3.1 in Fedora 26
w/ -Ofast -march=native.
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:
Determinism Slider = Power
IOMMU = Enabled,
NPS = NPS4,
x2APIC = ON,
xGMI Link Width Control = Manual
xGMI Force Link Width = 1 (Force xGMI link width to x8)

Sysinfo program /dev/shm/WORKDIR/pml-nod22/specCPU2017_1.1/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on pml-nod22 Mon Sep 16 08:55:43 2019

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : AMD EPYC 7H12 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

```

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 256
On-line CPU(s) list:   0-255
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7H12 64-Core Processor
Stepping:               0
CPU MHz:                3292.330
CPU max MHz:            2600.0000
CPU min MHz:            1500.0000
BogoMIPS:               5199.45
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-15,128-143
NUMA node1 CPU(s):     16-31,144-159
NUMA node2 CPU(s):     32-47,160-175
NUMA node3 CPU(s):     48-63,176-191
NUMA node4 CPU(s):     64-79,192-207

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pri
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload
vgif umip rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136
137 138 139 140 141 142 143
node 0 size: 128563 MB
node 0 free: 111730 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149
150 151 152 153 154 155 156 157 158 159
node 1 size: 129015 MB
node 1 free: 116678 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165
166 167 168 169 170 171 172 173 174 175
node 2 size: 129015 MB
node 2 free: 113735 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181
182 183 184 185 186 187 188 189 190 191
node 3 size: 128979 MB
node 3 free: 116774 MB
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197
198 199 200 201 202 203 204 205 206 207
node 4 size: 129015 MB
node 4 free: 116635 MB
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213
214 215 216 217 218 219 220 221 222 223
node 5 size: 129015 MB
node 5 free: 116852 MB
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

227 228 229 230 231 232 233 234 235 236 237 238 239
node 6 size: 129015 MB
node 6 free: 116820 MB
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241
242 243 244 245 246 247 248 249 250 251 252 253 254 255
node 7 size: 129014 MB
node 7 free: 116673 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 12 12 32 32 32 32
  1:  12 10 12 12 32 32 32 32
  2:  12 12 10 12 32 32 32 32
  3:  12 12 12 10 32 32 32 32
  4:  32 32 32 32 10 12 12 12
  5:  32 32 32 32 12 10 12 12
  6:  32 32 32 32 12 12 10 12
  7:  32 32 32 32 12 12 12 10

```

```

From /proc/meminfo
MemTotal:      1056394272 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.0 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.0"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga

```

```

uname -a:
Linux pml-nod22 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): via prctl and seccomp Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Sep 13 13:07

SPEC is set to: /dev/shm/WORKDIR/pml-nod22/specCPU2017_1.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 504G 99G 406G 20% /dev/shm

From /sys/devices/virtual/dmi/id
BIOS: GIGABYTE BIOS_RME090.10.11.001 07/31/2019
Vendor: BULL
Product: Bull sequana XH2000
Product Family: Server
Serial: 01234567890123456789AB

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Micron Technology 36ASF8G72PZ-3G2B2 64 kB 2 rank 3200

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

=====
AOC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOC_2_0_0-Build#191) (based on LLVM AOC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOC_2_0_0-Build#191) (based on LLVM AOC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Portability Flags (Continued)

```
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
508.namd_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

508.namd_r (continued):

```
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc  
-lflang
```

510.parest_r: basepeak = yes

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3  
-march=znver2 -funroll-loops -Mrecursive  
-mllvm -vector-library=LIBMVEC -Kieee  
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc  
-lflang
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2  
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC  
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2  
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -O3 -funroll-loops -Mrecursive -Kieee  
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm  
-ljemalloc -lflang
```

526.blender_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm  
-ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Atos-BULL-Sequana_XH2000-Flags-V1.0.html

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Atos-BULL-Sequana_XH2000-Flags-V1.0.xml

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ATOS

BULL Sequana XH2000
(2.6GHz, AMD EPYC 7H12 64-Core)

SPECrate®2017_fp_base = 529

SPECrate®2017_fp_peak = 586

CPU2017 License: 20
Test Sponsor: ATOS
Tested by: ATOS

Test Date: Sep-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-09-16 02:55:42-0400.
Report generated on 2019-10-15 14:35:04 by CPU2017 PDF formatter v6255.
Originally published on 2019-10-15.