



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

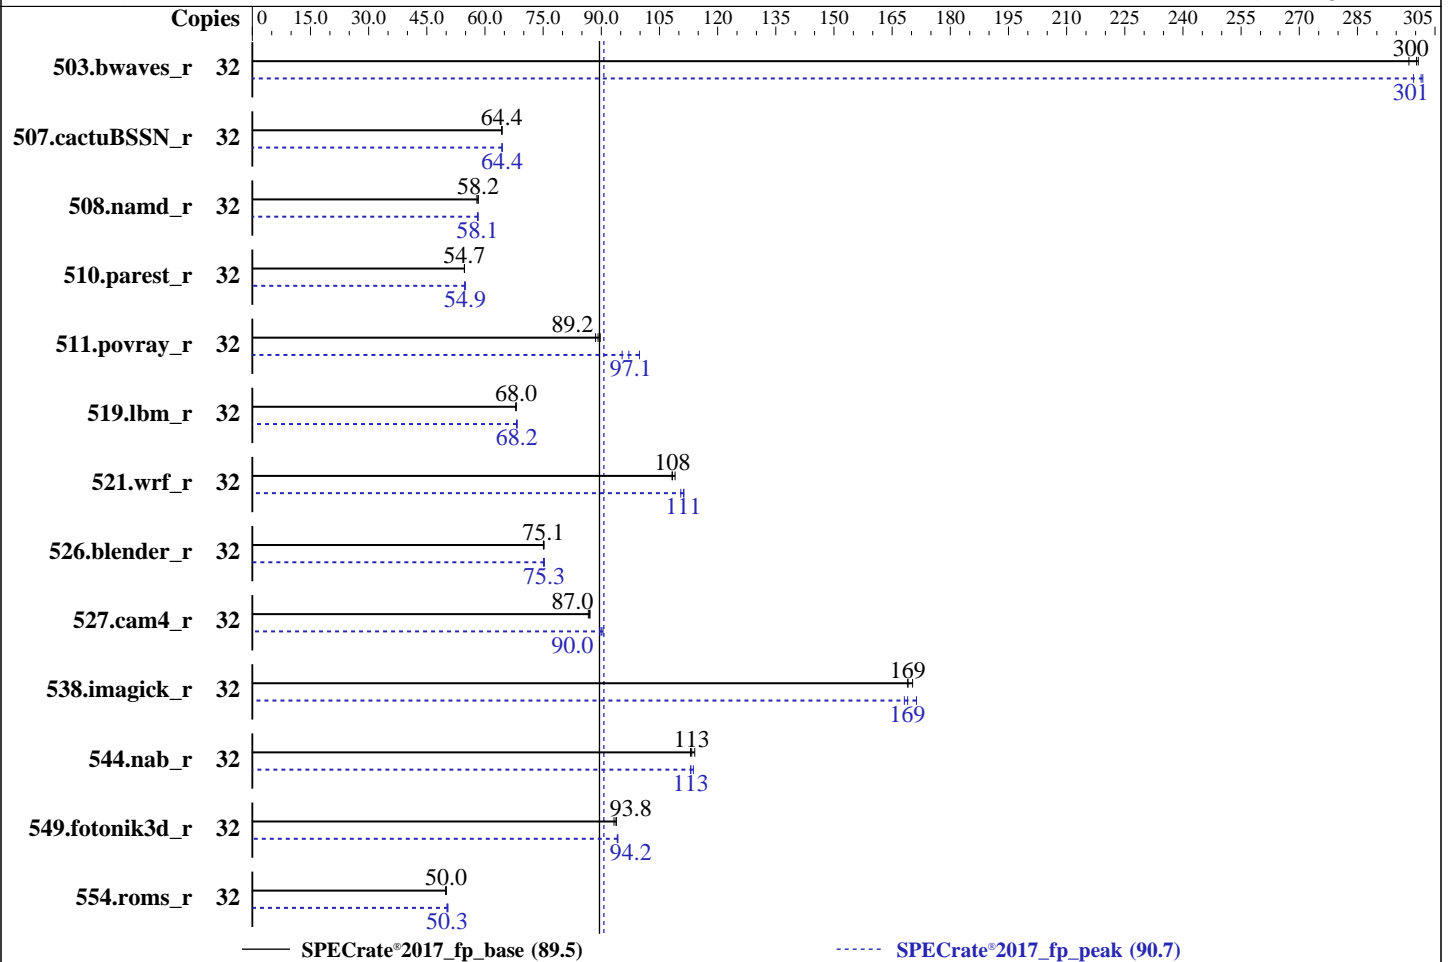

Hardware

CPU Name: Intel Xeon Silver 4110
 Max MHz: 3000
 Nominal: 2100
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 (chip)s
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933P-R, running at 2400)
 Storage: 1 x 480 GB SSD
 Other: None

Software

OS: CentOS Linux release 7.7.1908 (Core)
 3.10.0-1062.el7.x86_64
 Compiler: C/C++: Version 19.0.4.243 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.243 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: Version 3.1a released Jun-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: None



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1069	300	1067	301	1076	298	32	1072	299	1063	302	1065	301
507.cactuBSSN_r	32	629	64.4	630	64.3	629	64.4	32	629	64.4	629	64.4	629	64.4
508.namd_r	32	525	57.9	522	58.2	522	58.3	32	522	58.3	524	58.1	523	58.1
510.parest_r	32	1530	54.7	1531	54.7	1530	54.7	32	1529	54.8	1524	54.9	1526	54.9
511.povray_r	32	833	89.7	844	88.5	838	89.2	32	783	95.4	769	97.1	748	99.8
519.lbm_r	32	496	68.0	496	67.9	496	68.1	32	494	68.3	495	68.2	494	68.2
521.wrf_r	32	662	108	662	108	657	109	32	644	111	644	111	649	110
526.blender_r	32	648	75.2	649	75.1	649	75.1	32	647	75.3	649	75.1	648	75.3
527.cam4_r	32	643	87.1	646	86.7	643	87.0	32	622	90.0	619	90.4	624	89.6
538.imagick_r	32	467	170	471	169	471	169	32	471	169	465	171	473	168
544.nab_r	32	477	113	475	113	472	114	32	473	114	476	113	476	113
549.fotonik3d_r	32	1329	93.8	1337	93.3	1329	93.9	32	1323	94.3	1324	94.2	1325	94.1
554.roms_r	32	1016	50.0	1018	50.0	1020	49.9	32	1008	50.5	1011	50.3	1013	50.2

SPECrate®2017_fp_base = **89.5**

SPECrate®2017_fp_peak = **90.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms.

Intel has granted a one-time waiver for this result.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on NODE3 Sun Nov 3 05:33:44 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
```

```
2 "physical id"s (chips)
```

```
32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
```

```
siblings : 16
```

```
physical 0: cores 0 1 2 3 4 5 6 7
```

```
physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture: x86_64
```

```
CPU op-mode(s): 32-bit, 64-bit
```

```
Byte Order: Little Endian
```

```
CPU(s): 32
```

```
On-line CPU(s) list: 0-31
```

```
Thread(s) per core: 2
```

```
Core(s) per socket: 8
```

```
Socket(s): 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4110 CPU @ 2.10GHz
Stepping:              4
CPU MHz:               800.061
CPU max MHz:           3000.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              11264K
NUMA node0 CPU(s):    0-7,16-23
NUMA node1 CPU(s):    8-15,24-31

```

```

Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
md_clear spec_ctrl intel_stibp flush_l1d

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 195239 MB
node 0 free: 180219 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 196608 MB
node 1 free: 183844 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

From /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Platform Notes (Continued)

MemTotal: 394875832 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 7.7.1908 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.7.1908 (Core)
system-release: CentOS Linux release 7.7.1908 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

uname -a:

```
Linux NODE3 3.10.0-1062.el7.x86_64 #1 SMP Wed Aug 7 18:08:02 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Mitigation: PTE Inversion; VMX: conditional
cache flushes, SMT vulnerable
Microarchitectural Data Sampling: Mitigation: Clear CPU buffers; SMT vulnerable
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline, IBPB
```

run-level 3 Nov 2 19:04

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/centos-home xfs 392G 123G 270G 32% /home
```

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. 3.1a 06/11/2019
Vendor: Tyrone Systems
Product: X11DAI-N
Serial: 123456789
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
DS400TR-54/R
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Netweb

Test Date: Nov-2019
Hardware Availability: Sep-2019
Software Availability: Aug-2019

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x NO DIMM NO DIMM
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
538.imagick_r: -DSPEC_LP64
```

```
544.nab_r: -DSPEC_LP64
```

```
549.fotonik3d_r: -DSPEC_LP64
```

```
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
DS400TR-54/R
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Netweb

Test Date: Nov-2019
Hardware Availability: Sep-2019
Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
DS400TR-54/R
(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Netweb

Test Date: Nov-2019
Hardware Availability: Sep-2019
Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DS400TR-54/R

(2.10 GHz, Intel Xeon Silver 4110)

SPECrate®2017_fp_base = 89.5

SPECrate®2017_fp_peak = 90.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.html>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.xml>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-02 20:03:43-0400.

Report generated on 2020-10-29 14:57:43 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.