



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55


Test Date: Aug-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

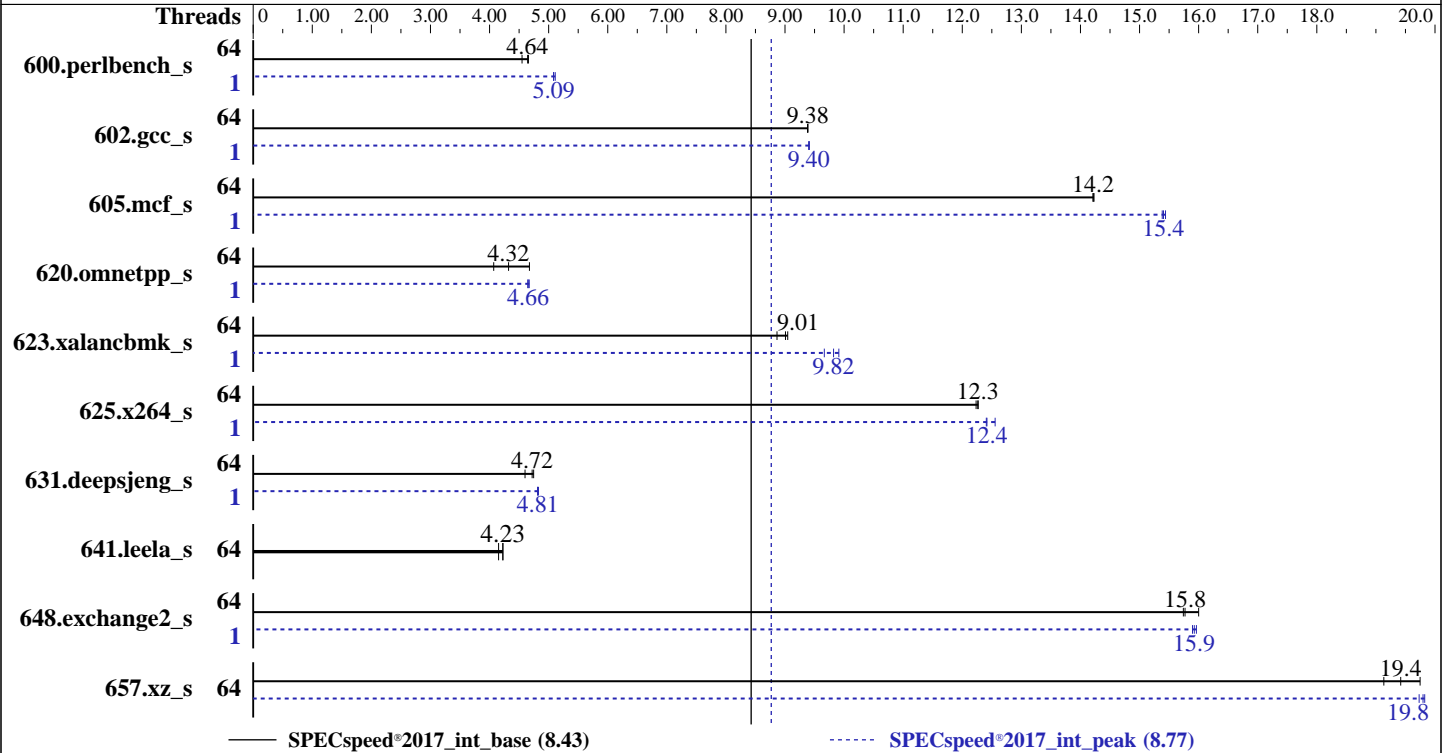

### Hardware

CPU Name: AMD EPYC 7702P  
 Max MHz: 3350  
 Nominal: 2000  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 0.4.7 released Aug-2019  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: --



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	381	4.66	390	4.55	<b>382</b>	<b>4.64</b>	1	349	5.08	<b>349</b>	<b>5.09</b>	347	5.11
602.gcc_s	64	<b>424</b>	<b>9.38</b>	424	9.38	424	9.39	1	<b>423</b>	<b>9.40</b>	423	9.41	423	9.40
605.mcf_s	64	332	14.2	332	14.2	<b>332</b>	<b>14.2</b>	1	<b>306</b>	<b>15.4</b>	306	15.4	307	15.4
620.omnetpp_s	64	349	4.67	401	4.07	<b>377</b>	<b>4.32</b>	1	349	4.67	351	4.65	<b>350</b>	<b>4.66</b>
623.xalancbmk_s	64	<b>157</b>	<b>9.01</b>	160	8.86	157	9.05	1	147	9.67	143	9.91	<b>144</b>	<b>9.82</b>
625.x264_s	64	<b>144</b>	<b>12.3</b>	144	12.3	144	12.2	1	<b>142</b>	<b>12.4</b>	140	12.6	142	12.4
631.deepsjeng_s	64	312	4.60	<b>304</b>	<b>4.72</b>	302	4.75	1	298	4.81	297	4.83	<b>298</b>	<b>4.81</b>
641.leela_s	64	411	4.15	404	4.23	<b>404</b>	<b>4.23</b>	64	411	4.15	404	4.23	<b>404</b>	<b>4.23</b>
648.exchange2_s	64	187	15.7	184	16.0	<b>186</b>	<b>15.8</b>	1	184	16.0	<b>185</b>	<b>15.9</b>	185	15.9
657.xz_s	64	<b>318</b>	<b>19.4</b>	323	19.1	313	19.7	64	313	19.7	312	19.8	<b>312</b>	<b>19.8</b>

SPECspeed®2017\_int\_base = **8.43**

SPECspeed®2017\_int\_peak = **8.77**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/root/cpu2017-1.0.5/amd\_rate\_aocc200\_rome\_B\_lib/64  
;/root/cpu2017-1.0.5/amd\_rate\_aocc200\_rome\_B\_lib/32:"  
MALLOCONF = "retain:true"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:  
NUMA Nodes Per Socket set to 4  
CCX as NUMA Domain set to Enabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost Enabled  
Cstates set to Enabled  
Memory Patrol Scrub Disabled  
Memory Refresh Rate set to 1x  
PCI ASPM L1 Link Power Management Disabled  
Determinism Slider set to Power Determinism  
Efficiency Optimized Mode Disabled  
Sysinfo program /root/cpu2017-1.0.5/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-g3ob Tue Sep 10 01:56:17 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7702P 64-Core Processor  
1 "physical id"s (chips)  
128 "processors"

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              1
NUMA node(s):          16
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7702P 64-Core Processor
Stepping:               0
CPU MHz:                1996.341
BogoMIPS:               3992.68
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-3,64-67
NUMA node1 CPU(s):     4-7,68-71
NUMA node2 CPU(s):     8-11,72-75
NUMA node3 CPU(s):     12-15,76-79
NUMA node4 CPU(s):     16-19,80-83
NUMA node5 CPU(s):     20-23,84-87
NUMA node6 CPU(s):     24-27,88-91
NUMA node7 CPU(s):     28-31,92-95
NUMA node8 CPU(s):     32-35,96-99
NUMA node9 CPU(s):     36-39,100-103
NUMA node10 CPU(s):    40-43,104-107
NUMA node11 CPU(s):    44-47,108-111
NUMA node12 CPU(s):    48-51,112-115
NUMA node13 CPU(s):    52-55,116-119
NUMA node14 CPU(s):    56-59,120-123
NUMA node15 CPU(s):    60-63,124-127

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpelgb rdtscp lm constant\_tsc rep\_good noopl xtopology nonstop\_tsc cpuid extd\_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx cpb cat\_l3 cdp\_l3 hw\_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_omsave\_vmload vgif umip rdpid overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 15692 MB
node 0 free: 15415 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 16126 MB
node 1 free: 15998 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 16126 MB
node 2 free: 15823 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 16125 MB
node 3 free: 16053 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 16126 MB
node 4 free: 16042 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 16126 MB
node 5 free: 16059 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 16126 MB
node 6 free: 16071 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 16125 MB
node 7 free: 16013 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 16126 MB
node 8 free: 15878 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 16126 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

```

node 9 free: 16021 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 16126 MB
node 10 free: 16072 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 16125 MB
node 11 free: 16022 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 16096 MB
node 12 free: 15973 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 16126 MB
node 13 free: 16065 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 16126 MB
node 14 free: 16067 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 16111 MB
node 15 free: 16043 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12
1:  11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12
2:  11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12
3:  11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12
4:  12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12
5:  12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12
6:  12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12
7:  12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12
8:  12 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12
9:  12 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12
10: 12 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12
11: 12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12
12: 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11 11
13: 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11 11
14: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10 11
15: 12 12 12 12 12 12 12 12 12 12 12 12 11 11 11 10

```

```

From /proc/meminfo
MemTotal:      263721756 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

```

VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

```

uname -a:
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling

```

run-level 5 Sep 8 20:45

```

SPEC is set to: /root/cpu2017-1.0.5
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   440G   15G  426G   4% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS Dell Inc. 0.4.7 08/19/2019
Memory:
8x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
8x Not Specified Not Specified

```

(End of data from sysinfo program)

## Compiler Version Notes

```

-----
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Aug-2019  
Hardware Availability: Sep-2019  
Software Availability: Aug-2019

## Compiler Version Notes (Continued)

=====  
C++ | 623.xalancbmk\_s(peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
C++ | 623.xalancbmk\_s(peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
 AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
 602.gcc\_s: -DSPEC\_LP64  
 605.mcf\_s: -DSPEC\_LP64  
 620.omnetpp\_s: -DSPEC\_LP64  
 623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
 625.x264\_s: -DSPEC\_LP64  
 631.deepsjeng\_s: -DSPEC\_LP64  
 641.leela\_s: -DSPEC\_LP64  
 648.exchange2\_s: -DSPEC\_LP64  
 657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
 -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
 -Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
 -march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
 -fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
 -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECSpeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

```
602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp
-lomp -lpthread -ldl -ljemalloc
```

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264\_s: Same as 600.perlbench\_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

657.xz\_s (continued):

```
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.43

PowerEdge C6525 (AMD EPYC 7702P, 2.00GHz)

SPECspeed®2017\_int\_peak = 8.77

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang

## Peak Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks (except as noted below):

-Wno-return-type

623.xalancbmk\_s: -Wno-return-type

-L/sppo/dev/cpu2017/amd\_speed\_aocc200\_rome/amd\_speed\_aocc200\_rome\_B\_lib/32

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE6.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-10 01:56:16-0400.

Report generated on 2019-11-26 12:52:36 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.