SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

$SPECrate^{®}2017\_int\_base = 578$

$SPECrate^{®}2017\_int\_peak = 635$

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Copies

Benchmark	Copies	base	peak
500.perlbench_r	256	413	442
502.gcc_r	256	440	590
505.mcf_r	256	587	761
520.omnetpp_r	256	296	292
523.xalancbmk_r	256	477	614
525.x264_r	256	1340	1360
531.deepsjeng_r	256	577	593
541.leela_r	256	585	580
548.exchange2_r	256	1540	1610
557.xz_r	256	401	395

SPECrate®2017_int_base (578) SPECrate®2017_int_peak (635)

Hardware

CPU Name: AMD EPYC 7702
  Max MHz: 3350
  Nominal: 2000
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 1, 2 (chip)s
Cache L1: 32 KB I + 32 KB D on chip per core
  L2: 512 KB I+D on chip per core
  L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
  Other: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 960 GB SSD
Other: None

Software

OS: Ubuntu 19.04
  kernel version
  5.0.0-36-generic
Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
Parallel: No
Firmware: Version 1.0 released Jul-2019
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc: jemalloc memory allocator library v5.2.0
Power Management: Default

Standard Performance Evaluation Corporation (info@spec.org)

https://www.spec.org/

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

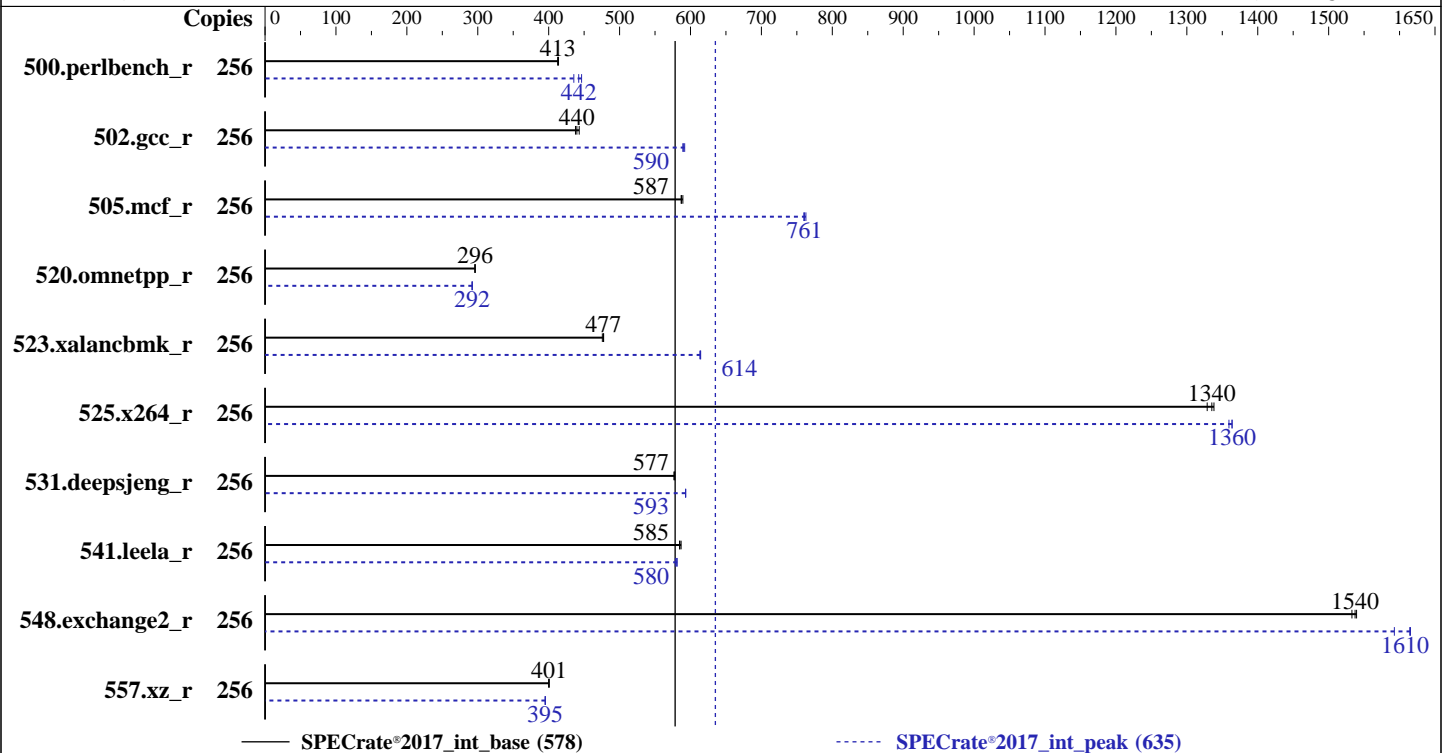SPECrate®2017_int_peak = 635

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	985	414	**987**	**413**	987	413	256	936	435	913	446	**921**	**442**
502.gcc_r	256	828	438	818	443	**824**	**440**	256	613	592	**614**	**590**	615	589
505.mcf_r	256	705	587	**705**	**587**	702	589	256	542	763	544	760	**544**	**761**
520.omnetpp_r	256	1135	296	**1134**	**296**	1133	296	256	**1150**	**292**	1149	292	1150	292
523.xalancbmk_r	256	568	476	566	478	**566**	**477**	256	**440**	**614**	441	613	440	614
525.x264_r	256	335	1340	337	1330	**336**	**1340**	256	330	1360	329	1360	**329**	**1360**
531.deepsjeng_r	256	508	578	**508**	**577**	509	577	256	495	593	**495**	**593**	495	593
541.leela_r	256	722	587	725	585	**725**	**585**	256	733	579	**730**	**580**	729	581
548.exchange2_r	256	**436**	**1540**	436	1540	438	1530	256	**415**	**1610**	415	1620	421	1590
557.xz_r	256	691	400	690	401	**690**	**401**	256	700	395	699	395	**700**	**395**

SPECrate®2017_int_base = **578**

SPECrate®2017_int_peak = **635**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).
```

(Continued on next page)

SPEC CPU®2017 Integer Rate Result
Copyright 2017-2019 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2

Platform Notes

```
Sysinfo program /cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on spec Fri Nov 15 10:17:59 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7702 64-Core Processor
      2  "physical id"s (chips)
      256 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 64
      siblings  : 128
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
         25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
```

(Continued on next page)

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```
      53 54 55 56 57 58 59 60 61 62 63
    physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      Address sizes:       43 bits physical, 48 bits virtual
      CPU(s):              256
      On-line CPU(s) list: 0-255
      Thread(s) per core:  2
      Core(s) per socket:  64
      Socket(s):           2
      NUMA node(s):        2
      Vendor ID:           AuthenticAMD
      CPU family:          23
      Model:               49
      Model name:          AMD EPYC 7702 64-Core Processor
      Stepping:            0
      CPU MHz:             1476.746
      CPU max MHz:         2000.0000
      CPU min MHz:         1500.0000
      BogoMIPS:            3999.73
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-63,128-191
      NUMA node1 CPU(s):   64-127,192-255
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
    pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
    constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
    pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
    f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
    3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp
    vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb
    sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
    cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save
    tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
    v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

 /proc/cpuinfo cache data
    cache size : 512 KB
```

(Continued on next page)

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Netweb

Test Date: Nov-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
  57 58 59 60 61 62 63 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143
  144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
  166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187
  188 189 190 191
  node 0 size: 257878 MB
  node 0 free: 256070 MB
  node 1 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
  89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112
  113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 192 193 194 195 196 197 198
  199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220
  221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242
  243 244 245 246 247 248 249 250 251 252 253 254 255
  node 1 size: 257994 MB
  node 1 free: 255753 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

From /proc/meminfo
   MemTotal:       528253524 kB
   HugePages_Total:        0
   Hugepagesize:        2048 kB

/usr/bin/lsb_release -d
   Ubuntu 19.04

From /etc/*release* /etc/*version*
   debian_version: buster/sid
   os-release:
      NAME="Ubuntu"
      VERSION="19.04 (Disco Dingo)"
      ID=ubuntu
      ID_LIKE=debian
      PRETTY_NAME="Ubuntu 19.04"
      VERSION_ID="19.04"
      HOME_URL="https://www.ubuntu.com/"
      SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
   Linux spec 5.0.0-36-generic #39-Ubuntu SMP Tue Nov 12 09:46:06 UTC 2019 x86_64 x86_64
```

(Continued on next page)

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Netweb

Test Date: Nov-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
    x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 itlb_multihit:                         Not affected
 CVE-2018-3620 (L1 Terminal Fault):     Not affected
 Microarchitectural Data Sampling:      Not affected
 CVE-2017-5754 (Meltdown):              Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                  via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
                                  pointer sanitization
 CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
                                  conditional, IBRS_FW, STIBP: always-on, RSB
                                  filling
 tsx_async_abort:                       Not affected


 run-level 5 Nov 15 06:39


 SPEC is set to: /cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda2       ext4  880G   18G  818G   3% /

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 1.0 07/04/2019
     Vendor:  Tyrone Systems
     Product: DA720TB-224R
     Serial:  0123456789


 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393A4K40DB3-CWE 32 kB 2 rank 3200


 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
  C      | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
```

(Continued on next page)

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042   **Test Date:** Nov-2019

Test Sponsor: Netweb Pte Ltd   **Hardware Availability:** Aug-2019

Tested by: Netweb   **Software Availability:** Aug-2019

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------


==============================================================================
C         | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------


==============================================================================
C         | 502.gcc_r(peak)
------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------


==============================================================================
C         | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------


==============================================================================
C++       | 523.xalancbmk_r(peak)
------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------


==============================================================================
```

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

```
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C++      | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------


==============================================================================
Fortran  | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/anuj/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Nov-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)

Standard Performance Evaluation Corporation (info@spec.org)

https://www.spec.org/

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

Base Optimization Flags (Continued)

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
```
clang
```

C++ benchmarks:
```
clang++
```

Fortran benchmarks:
```
flang
```

Peak Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -D_FILE_OFFSET_BITS=64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-flto -Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-region-vectorize`

(Continued on next page)

Standard Performance Evaluation Corporation (info@spec.org) https://www.spec.org/

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042		**Test Date:**	Nov-2019
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Aug-2019
Tested by:	Netweb	**Software Availability:**	Aug-2019

Peak Optimization Flags (Continued)

500.perlbench_r (continued):
```
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

502.gcc_r: `-m32 -flto -Wl,-mllvm -Wl,-function-specialize`
```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

505.mcf_r: `-flto -Wl,-mllvm -Wl,-function-specialize`
```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264_r: `Same as 500.perlbench_r`

557.xz_r: `Same as 505.mcf_r`

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Netweb

Test Date: Nov-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

```
531.deepsjeng_r: Same as 520.omnetpp_r
```

```
541.leela_r: Same as 520.omnetpp_r
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

(Continued on next page)

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)

DA720TB-224R
(2.00 GHz,AMD EPYC 7702)

SPECrate®2017_int_base = 578

SPECrate®2017_int_peak = 635

CPU2017 License: 006042		**Test Date:**	Nov-2019
Test Sponsor:	Netweb Pte Ltd	**Hardware Availability:**	Aug-2019
Tested by:	Netweb	**Software Availability:**	Aug-2019

Peak Other Flags (Continued)

502.gcc_r: `-L/cpu2017/amd_rate_aocc200_rome_B_lib/32`

C++ benchmarks:

523.xalancbmk_r: `-L/cpu2017/amd_rate_aocc200_rome_B_lib/32`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html`
`http://www.spec.org/cpu2017/flags/Tyrone-platform_amd_rate_aocc200_rome_B1.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml`
`http://www.spec.org/cpu2017/flags/Tyrone-platform_amd_rate_aocc200_rome_B1.xml`

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-15 05:17:58-0500.
Report generated on 2019-12-10 14:56:53 by CPU2017 PDF formatter v6255.
Originally published on 2019-12-10.