



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55


Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

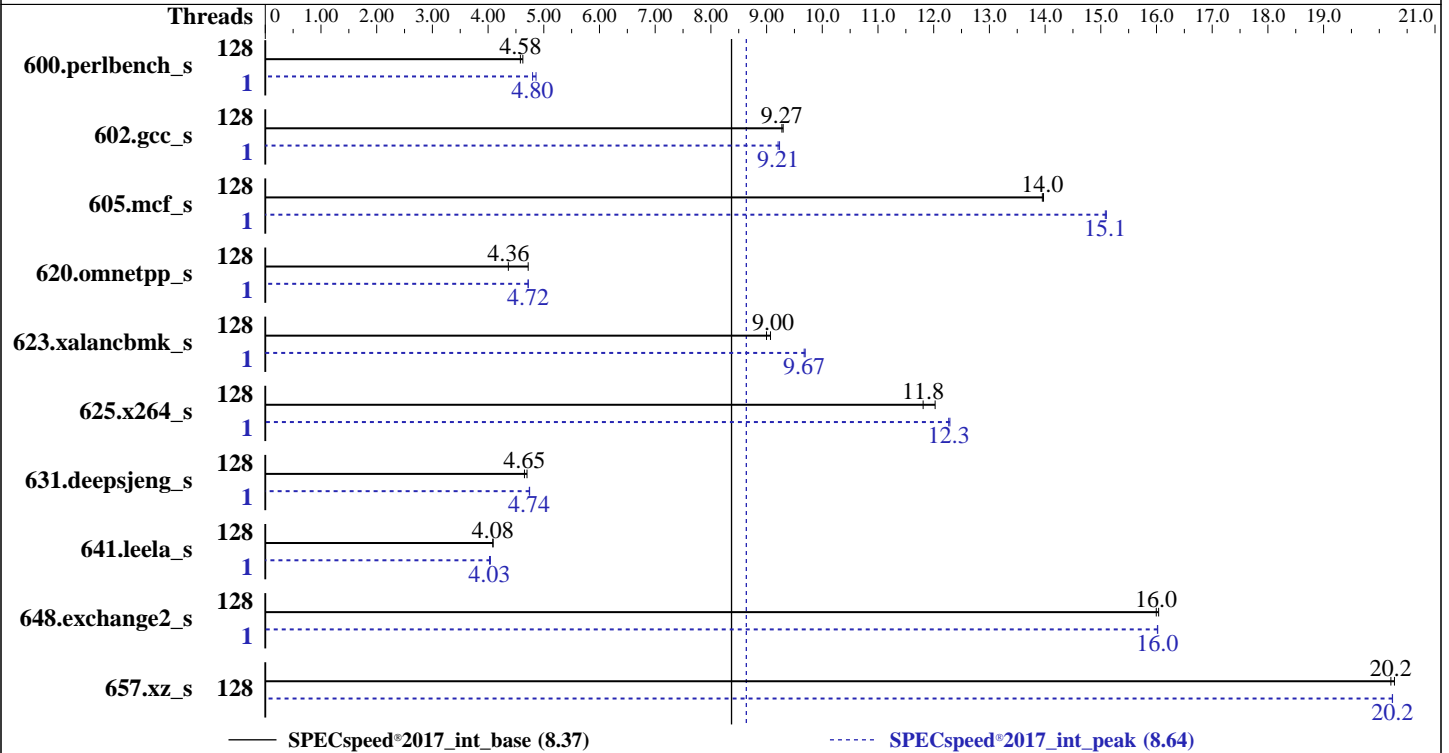

Hardware

CPU Name: AMD EPYC 7H12
 Max MHz: 3300
 Nominal: 2600
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.2.4 released Nov-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECSpeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	384	4.62	388	4.58			1	365	4.86	370	4.80		
602.gcc_s	128	429	9.27	428	9.30			1	431	9.23	433	9.21		
605.mcf_s	128	338	14.0	338	14.0			1	313	15.1	313	15.1		
620.omnetpp_s	128	346	4.72	374	4.36			1	346	4.72	346	4.72		
623.xalancbmk_s	128	157	9.00	156	9.07			1	146	9.67	146	9.69		
625.x264_s	128	147	12.0	149	11.8			1	144	12.3	144	12.3		
631.deepsjeng_s	128	308	4.65	305	4.70			1	302	4.75	302	4.74		
641.leela_s	128	417	4.09	418	4.08			1	422	4.04	424	4.03		
648.exchange2_s	128	184	16.0	183	16.0			1	183	16.0	184	16.0		
657.xz_s	128	305	20.3	306	20.2			128	306	20.2	305	20.2		

SPECSpeed®2017_int_base = **8.37**

SPECSpeed®2017_int_peak = **8.64**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Date: Dec-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-127"

LD_LIBRARY_PATH =

"/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0
/amd_speed_aocc200_rome_C_lib/32:"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-127"



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2019
Hardware Availability: Feb-2019
Software Availability: Aug-2019

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:
NUMA Nodes Per Socket set to 4
CCX as NUMA Domain set to Enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
Cstates set to Enabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
PCI ASPM L1 Link Power Management Disabled
Determinism Slider set to Power Determinism
Efficiency Optimized Mode Disabled
Memory Interleaving set to Disabled
Logical Processor disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-g3ob Thu Dec 5 04:44:50 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7H12 64-Core Processor
2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

cpu cores : 64
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):              2
NUMA node(s):          32
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7H12 64-Core Processor
Stepping:               0
CPU MHz:                2595.391
BogoMIPS:               5190.78
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-3
NUMA node1 CPU(s):     4-7
NUMA node2 CPU(s):     8-11
NUMA node3 CPU(s):     12-15
NUMA node4 CPU(s):     16-19
NUMA node5 CPU(s):     20-23
NUMA node6 CPU(s):     24-27
NUMA node7 CPU(s):     28-31
NUMA node8 CPU(s):     32-35
NUMA node9 CPU(s):     36-39
NUMA node10 CPU(s):    40-43
NUMA node11 CPU(s):    44-47
NUMA node12 CPU(s):    48-51
NUMA node13 CPU(s):    52-55
NUMA node14 CPU(s):    56-59

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

NUMA node15 CPU(s): 60-63
NUMA node16 CPU(s): 64-67
NUMA node17 CPU(s): 68-71
NUMA node18 CPU(s): 72-75
NUMA node19 CPU(s): 76-79
NUMA node20 CPU(s): 80-83
NUMA node21 CPU(s): 84-87
NUMA node22 CPU(s): 88-91
NUMA node23 CPU(s): 92-95
NUMA node24 CPU(s): 96-99
NUMA node25 CPU(s): 100-103
NUMA node26 CPU(s): 104-107
NUMA node27 CPU(s): 108-111
NUMA node28 CPU(s): 112-115
NUMA node29 CPU(s): 116-119
NUMA node30 CPU(s): 120-123
NUMA node31 CPU(s): 124-127

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip
rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 32 nodes (0-31)
node 0 cpus: 0 1 2 3
node 0 size: 15676 MB
node 0 free: 15616 MB
node 1 cpus: 4 5 6 7
node 1 size: 16127 MB
node 1 free: 16077 MB
node 2 cpus: 8 9 10 11
node 2 size: 16127 MB
node 2 free: 16081 MB
node 3 cpus: 12 13 14 15
node 3 size: 16126 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 3 free: 16073 MB
node 4 cpus: 16 17 18 19
node 4 size: 16127 MB
node 4 free: 16079 MB
node 5 cpus: 20 21 22 23
node 5 size: 16127 MB
node 5 free: 16087 MB
node 6 cpus: 24 25 26 27
node 6 size: 16127 MB
node 6 free: 16081 MB
node 7 cpus: 28 29 30 31
node 7 size: 16126 MB
node 7 free: 16035 MB
node 8 cpus: 32 33 34 35
node 8 size: 16127 MB
node 8 free: 16018 MB
node 9 cpus: 36 37 38 39
node 9 size: 16127 MB
node 9 free: 16037 MB
node 10 cpus: 40 41 42 43
node 10 size: 16127 MB
node 10 free: 15989 MB
node 11 cpus: 44 45 46 47
node 11 size: 16126 MB
node 11 free: 16021 MB
node 12 cpus: 48 49 50 51
node 12 size: 16127 MB
node 12 free: 15992 MB
node 13 cpus: 52 53 54 55
node 13 size: 16127 MB
node 13 free: 16076 MB
node 14 cpus: 56 57 58 59
node 14 size: 16127 MB
node 14 free: 16087 MB
node 15 cpus: 60 61 62 63
node 15 size: 16114 MB
node 15 free: 16019 MB
node 16 cpus: 64 65 66 67
node 16 size: 16127 MB
node 16 free: 16094 MB
node 17 cpus: 68 69 70 71
node 17 size: 16127 MB
node 17 free: 16097 MB
node 18 cpus: 72 73 74 75
node 18 size: 16127 MB
node 18 free: 16098 MB
node 19 cpus: 76 77 78 79

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 19 size: 16126 MB
node 19 free: 16096 MB
node 20 cpus: 80 81 82 83
node 20 size: 16127 MB
node 20 free: 16100 MB
node 21 cpus: 84 85 86 87
node 21 size: 16127 MB
node 21 free: 16099 MB
node 22 cpus: 88 89 90 91
node 22 size: 16127 MB
node 22 free: 16099 MB
node 23 cpus: 92 93 94 95
node 23 size: 16126 MB
node 23 free: 16096 MB
node 24 cpus: 96 97 98 99
node 24 size: 16127 MB
node 24 free: 16087 MB
node 25 cpus: 100 101 102 103
node 25 size: 16127 MB
node 25 free: 16095 MB
node 26 cpus: 104 105 106 107
node 26 size: 16127 MB
node 26 free: 16098 MB
node 27 cpus: 108 109 110 111
node 27 size: 16126 MB
node 27 free: 16092 MB
node 28 cpus: 112 113 114 115
node 28 size: 16127 MB
node 28 free: 16094 MB
node 29 cpus: 116 117 118 119
node 29 size: 16127 MB
node 29 free: 16093 MB
node 30 cpus: 120 121 122 123
node 30 size: 16127 MB
node 30 free: 16094 MB
node 31 cpus: 124 125 126 127
node 31 size: 16095 MB
node 31 free: 16065 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25 26 27 28 29 30 31
  0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32
  1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32
  2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Platform Notes (Continued)

3:	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
4:	12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
5:	12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
6:	12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
7:	12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
8:	12	12	12	12	12	12	12	12	10	11	11	11	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
9:	12	12	12	12	12	12	12	12	11	10	11	11	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
10:	12	12	12	12	12	12	12	12	11	11	10	11	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
11:	12	12	12	12	12	12	12	12	11	11	11	10	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
12:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
13:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
14:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
15:	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	32	32	32	32
32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32				
16:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12				
17:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12				
18:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12				
19:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12				
20:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12				
21:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12				
22:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12				
23:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12				
24:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12	12				
25:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12	12				
26:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

12 12 12 12 11 11 10 11 12 12 12 12
27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12
12 12 12 12 11 11 11 10 12 12 12 12
28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12
12 12 12 12 12 12 12 12 10 11 11 11
29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12
12 12 12 12 12 12 12 12 11 10 11 11
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12
12 12 12 12 12 12 12 12 11 11 10 11
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12
12 12 12 12 12 12 12 12 11 11 11 10

```

From /proc/meminfo

```

MemTotal:      527939400 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

uname -a:

```

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: disabled, RSB
filling

```

run-level 3 Dec 5 04:40

SPEC is set to: /root/cpu2017-1.1.0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2019
Hardware Availability: Feb-2019
Software Availability: Aug-2019

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	440G	45G	396G	11%	/

```

From /sys/devices/virtual/dmi/id
BIOS: Dell Inc. 1.2.4 11/05/2019
Vendor: Dell Inc.
Product: PowerEdge R6525
Product Family: PowerEdge
Serial: C3JVPX2

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
16x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
16x Not Specified Not Specified

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
-----

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++   | 623.xalancbmk_s(peak)
-----

```

```

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++   | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

```
-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
====
C++      | 623.xalancbmk_s(peak)
-----
```

```
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
====
C++      | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
-----
```

```
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
====
Fortran  | 648.exchange2_s(base, peak)
-----
```

```
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

```

C++ benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Base Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Peak Portability Flags (Continued)

```

602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang

602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

602.gcc_s (continued):

-lomp -lpthread -ldl -ljemalloc

605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver2 -mno-sse4a -fstruct-layout=5

-mllvm -vectorize-memory-aggressively

-mllvm -function-specialize -mllvm -enable-gvn-hoist

-mllvm -unroll-threshold=50 -fremap-arrays

-mllvm -vector-library=LIBMVEC

-mllvm -reduce-array-computations=3

-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000

-flv-function-specialization -DSPEC_OPENMP -fopenmp

-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp

-lpthread -ldl -ljemalloc -lflang

625.x264_s: Same as 600.perlbench_s

657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver2 -mno-sse4a -fstruct-layout=5

-mllvm -vectorize-memory-aggressively

-mllvm -function-specialize -mllvm -enable-gvn-hoist

-mllvm -unroll-threshold=50 -fremap-arrays

-mllvm -vector-library=LIBMVEC

-mllvm -reduce-array-computations=3

-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000

-flv-function-specialization -DSPEC_OPENMP -fopenmp

-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl

-lmvec -lamdlibm -ljemalloc -lflang

C++ benchmarks:

620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-region-vectorize

-Wl,-mllvm -Wl,-vector-library=LIBMVEC

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver2 -flv-function-specialization

-mllvm -unroll-threshold=100

-mllvm -enable-partial-unswitch

-mllvm -loop-unswitch-threshold=200000

-mllvm -vector-library=LIBMVEC

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

620.omnetpp_s (continued):

```
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks (except as noted below):

```
-Wno-return-type
```

623.xalancbmk_s: -Wno-return-type

```
-L/spo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.37

PowerEdge R6525 (AMD EPYC 7H12, 2.60 GHz)

SPECspeed®2017_int_peak = 8.64

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2019

Hardware Availability: Feb-2019

Software Availability: Aug-2019

Peak Other Flags (Continued)

Fortran benchmarks:
-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-05 05:44:49-0500.

Report generated on 2019-12-26 11:33:24 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.