



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G, 3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

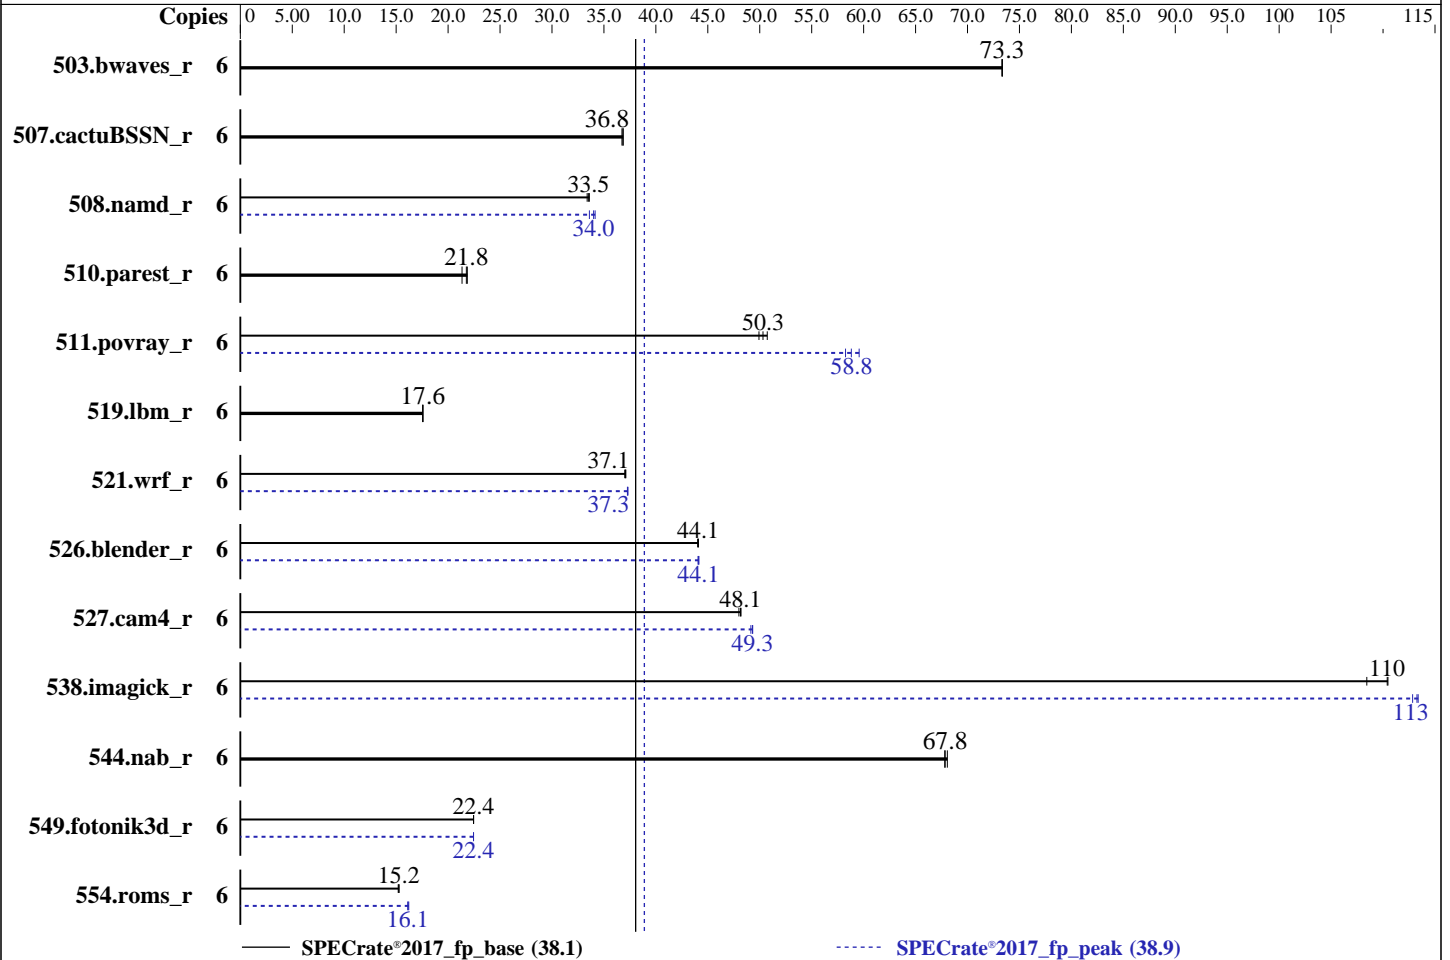

Hardware

CPU Name: Intel Xeon E-2246G
 Max MHz: 4800
 Nominal: 3600
 Enabled: 6 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
 Storage: 1 x SATA M.2 SSD, 480 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.13 R1.12.0 for D3673-A1x. Released Sep-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	6	820	73.4	820	73.3	821	73.3	6	820	73.4	820	73.3	821	73.3
507.cactuBSSN_r	6	206	36.8	207	36.7	206	36.9	6	206	36.8	207	36.7	206	36.9
508.namd_r	6	170	33.6	171	33.4	170	33.5	6	168	34.0	167	34.2	170	33.6
510.parest_r	6	735	21.3	718	21.9	721	21.8	6	735	21.3	718	21.9	721	21.8
511.povray_r	6	278	50.3	276	50.7	281	49.9	6	240	58.3	235	59.6	238	58.8
519.lbm_r	6	360	17.6	360	17.6	360	17.6	6	360	17.6	360	17.6	360	17.6
521.wrf_r	6	363	37.0	362	37.1	362	37.1	6	360	37.3	360	37.3	361	37.3
526.blender_r	6	207	44.1	208	44.0	207	44.1	6	207	44.1	207	44.1	207	44.1
527.cam4_r	6	218	48.1	219	48.0	218	48.2	6	213	49.3	213	49.3	214	49.1
538.imagick_r	6	135	110	138	108	135	110	6	132	113	132	113	132	113
544.nab_r	6	149	67.8	148	68.1	149	67.8	6	149	67.8	148	68.1	149	67.8
549.fotonik3d_r	6	1041	22.5	1042	22.4	1042	22.4	6	1042	22.4	1042	22.4	1042	22.4
554.roms_r	6	627	15.2	624	15.3	625	15.2	6	591	16.1	591	16.1	588	16.2

SPECrate®2017_fp_base = **38.1**

SPECrate®2017_fp_peak = **38.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32 GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
AES = Disabled
DCU Streamer Prefetcher = Disabled
Fan Control = Full
Hyper-Threading = Disabled
Package C-State limit = C0

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on SLES15-BMT Fri Jan 10 22:19:00 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2246G CPU @ 3.60GHz
 1 "physical id"s (chips)
 6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 6
On-line CPU(s) list: 0-5
Thread(s) per core: 1
Core(s) per socket: 6
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

```

CPU family:           6
Model:               158
Model name:          Intel(R) Xeon(R) E-2246G CPU @ 3.60GHz
Stepping:            10
CPU MHz:             3600.000
CPU max MHz:         4800.0000
CPU min MHz:         800.0000
BogoMIPS:            7200.00
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            256K
L3 cache:            12288K
NUMA node0 CPU(s):  0-5
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pti
ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt
xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
flush_lld

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 63768 MB
node 0 free: 63287 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:          65299116 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

```
VERSION_ID="15"  
PRETTY_NAME="SUSE Linux Enterprise Server 15"  
ID="sles"  
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:  
Linux SLES15-BMT 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Mitigation: PTE Inversion; VMX: vulnerable, SMT  
                                         disabled  
Microarchitectural Data Sampling:      No status reported  
CVE-2017-5754 (Meltdown):               Mitigation: PTI  
CVE-2018-3639 (Speculative Store Bypass): Vulnerable  
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted  
                                         Speculation, IBPB: conditional, IBRS_FW, RSB  
                                         filling
```

```
run-level 3 Jan 10 22:12
```

```
SPEC is set to: /home/Benchmark/speccpu2017-1.1.0  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda5       xfs   343G   66G  278G  20% /home
```

```
From /sys/devices/virtual/dmi/id  
BIOS: FUJITSU // American Megatrends Inc. V5.0.0.13 R1.12.0 for D3673-A1x  
      09/06/2019  
Vendor: FUJITSU  
Product: PRIMERGY TX1330 M4  
Product Family: SERVER  
Serial: YMJLXXXXXX
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:  
4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667
```

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

Base Portability Flags (Continued)

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU[®]2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate[®]2017_fp_base = 38.1

SPECrate[®]2017_fp_peak = 38.9

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2246G,
3.60 GHz

SPECrate®2017_fp_base = 38.1

SPECrate®2017_fp_peak = 38.9

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

Peak Optimization Flags (Continued)

549.fotonik3d_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-10 08:19:00-0500.

Report generated on 2020-02-04 17:56:03 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-04.