



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation


**Tyrone Systems**  
 (Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
 (2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1

SPECspeed®2017\_int\_peak = 10.4

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

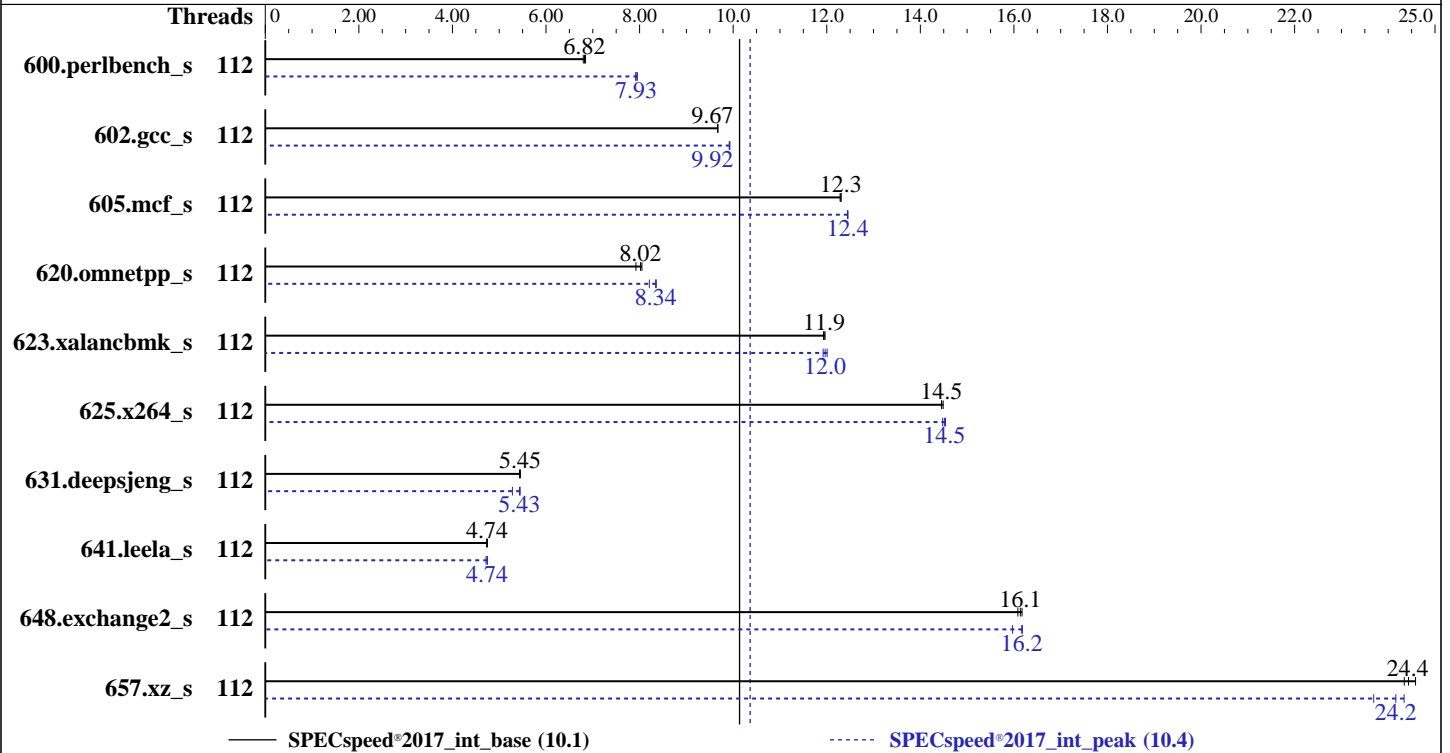

### Hardware

CPU Name: Intel Xeon Platinum 8280L  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 (chip)s  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SSD  
 Other: None

### Software

OS: CentOS Linux release 7.7.1908 (Core)  
 3.10.0-1062.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.243 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.243 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: Version V8.101 released Aug-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: Default



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1

SPECspeed®2017\_int\_peak = 10.4

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Feb-2020

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	261	6.80	259	6.84	<b>260</b>	<b>6.82</b>	112	224	7.92	223	7.95	<b>224</b>	<b>7.93</b>
602.gcc_s	112	<b>412</b>	<b>9.67</b>	412	9.67	412	9.67	112	401	9.93	<b>401</b>	<b>9.92</b>	402	9.92
605.mcf_s	112	<b>384</b>	<b>12.3</b>	384	12.3	384	12.3	112	379	12.4	379	12.5	<b>379</b>	<b>12.4</b>
620.omnetpp_s	112	<b>203</b>	<b>8.02</b>	203	8.05	206	7.92	112	199	8.21	<b>195</b>	<b>8.34</b>	195	8.36
623.xalancbmk_s	112	118	12.0	119	11.9	<b>119</b>	<b>11.9</b>	112	<b>118</b>	<b>12.0</b>	118	12.0	119	11.9
625.x264_s	112	<b>122</b>	<b>14.5</b>	122	14.5	122	14.5	112	122	14.5	<b>122</b>	<b>14.5</b>	121	14.5
631.deepsjeng_s	112	264	5.43	263	5.45	<b>263</b>	<b>5.45</b>	112	<b>264</b>	<b>5.43</b>	263	5.45	271	5.28
641.leela_s	112	361	4.73	360	4.74	<b>360</b>	<b>4.74</b>	112	360	4.74	<b>360</b>	<b>4.74</b>	362	4.72
648.exchange2_s	112	183	16.1	182	16.2	<b>182</b>	<b>16.1</b>	112	182	16.2	<b>182</b>	<b>16.2</b>	184	16.0
657.xz_s	112	251	24.6	254	24.3	<b>253</b>	<b>24.4</b>	112	254	24.3	<b>256</b>	<b>24.2</b>	261	23.7

SPECspeed®2017\_int\_base = **10.1**

SPECspeed®2017\_int\_peak = **10.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms.

Intel has granted a one-time waiver for this result.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

"/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-

32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
 (Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
 (2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1  
**SPECspeed®2017\_int\_peak = 10.4**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system was tested with a pre-production version of the Intel Xeon Platinum 8280L, which had a nominal MHz of 2.6 GHz. Production chips have a nominal MHz of 2.7 GHz and therefore performance may be slightly faster than what was tested.

```

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on NODE4 Wed Feb 5 23:27:07 2020
  
```

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.60GHz
 2 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings  : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
  
```

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:   0-111
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              2
  
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**DIT400TR-48RL**

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1

SPECspeed®2017\_int\_peak = 10.4

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Platform Notes (Continued)

```

NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8280L CPU @ 2.60GHz
Stepping:              5
CPU MHz:               999.914
CPU max MHz:           3900.0000
CPU min MHz:           1000.0000
BogoMIPS:              5200.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-27,56-83
NUMA node1 CPU(s):    28-55,84-111
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_lld
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
node 0 size: 195228 MB
node 0 free: 155283 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
107 108 109 110 111
node 1 size: 196608 MB
node 1 free: 158796 MB
node distances:
node  0  1

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
(2.70 GHz, Intel Xeon Platinum 8280L)

**SPECspeed®2017\_int\_base = 10.1**  
**SPECspeed®2017\_int\_peak = 10.4**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 394852372 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
centos-release: CentOS Linux release 7.7.1908 (Core)  
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)  
os-release:  
NAME="CentOS Linux"  
VERSION="7 (Core)"  
ID="centos"  
ID\_LIKE="rhel fedora"  
VERSION\_ID="7"  
PRETTY\_NAME="CentOS Linux 7 (Core)"  
ANSI\_COLOR="0;31"  
CPE\_NAME="cpe:/o:centos:centos:7"  
redhat-release: CentOS Linux release 7.7.1908 (Core)  
system-release: CentOS Linux release 7.7.1908 (Core)  
system-release-cpe: cpe:/o:centos:centos:7

uname -a:  
Linux NODE4 3.10.0-1062.el7.x86\_64 #1 SMP Wed Aug 7 18:08:02 UTC 2019 x86\_64 x86\_64  
x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected  
Microarchitectural Data Sampling: Vulnerable: Clear CPU buffers attempted, no  
microcode; SMT vulnerable  
CVE-2017-5754 (Meltdown): Not affected  
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled  
via prctl and seccomp  
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, \_\_user pointer  
sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Full retpoline, IBPB

run-level 3 Feb 4 06:00

SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/centos-home xfs 392G 221G 171G 57% /home

From /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**DIT400TR-48RL**  
(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1

SPECspeed®2017\_int\_peak = 10.4

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Netweb

**Test Date:** Feb-2020  
**Hardware Availability:** Sep-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

BIOS: American Megatrends Inc. V8.101 08/02/2019  
Vendor: Tyrone Systems  
Product: TP12XH-L2I  
Serial: empty

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

```
=====  
Fortran | 648.exchange2_s(base, peak)  
-----
```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.243 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1

SPECspeed®2017\_int\_peak = 10.4

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
602.gcc_s: -DSPEC_LP64
```

```
605.mcf_s: -DSPEC_LP64
```

```
620.omnetpp_s: -DSPEC_LP64
```

```
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
```

```
625.x264_s: -DSPEC_LP64
```

```
631.deepsjeng_s: -DSPEC_LP64
```

```
641.leela_s: -DSPEC_LP64
```

```
648.exchange2_s: -DSPEC_LP64
```

```
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.243/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-nostandard-realloc-lhs
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

DIT400TR-48RL

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1

SPECspeed®2017\_int\_peak = 10.4

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**DIT400TR-48RL**

(2.70 GHz, Intel Xeon Platinum 8280L)

SPECspeed®2017\_int\_base = 10.1

SPECspeed®2017\_int\_peak = 10.4

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Netweb

**Test Date:** Feb-2020

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4

-DSPEC\_SUPPRESS\_OPENMP

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.243/linux/compiler/lib/intel64

-lqkmalloc

623.xalancbmk\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.243/linux/compiler/lib/intel64

-lqkmalloc

631.deepsjeng\_s: Same as 623.xalancbmk\_s

641.leela\_s: Same as 623.xalancbmk\_s

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4

-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/TyroneIT-Platform-Settings-V1-CLX-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/TyroneIT-Platform-Settings-V1-CLX-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-15.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-05 23:27:06-0500.

Report generated on 2020-10-29 21:04:54 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-17.