



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation


SPECrate®2017\_fp\_base = 38.4

### Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Mar-2020  
Hardware Availability: Jan-2020  
Software Availability: Sep-2019

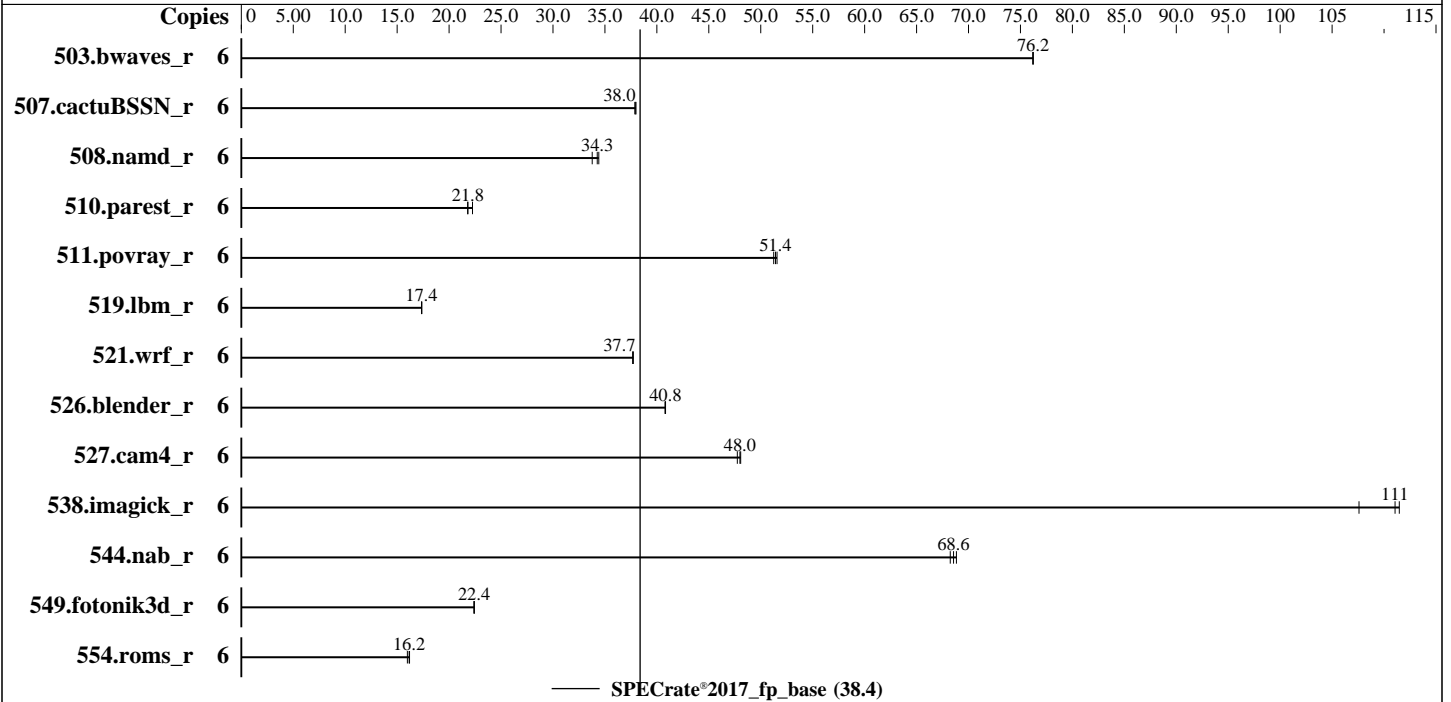

### Hardware

CPU Name: Intel Xeon E-2286G  
Max MHz: 4900  
Nominal: 4000  
Enabled: 6 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 12 MB I+D on chip per chip  
Other: None  
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2666V-E)  
Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
Kernel 3.10.0-1062.1.1.el7.x86\_64  
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
Parallel: No  
Firmware: NEC BIOS Version U43 v2.12 12/06/2019 released Mar-2020  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 38.4

Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Mar-2020  
Hardware Availability: Jan-2020  
Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	6	790	76.2	789	76.2	<b>789</b>	<b>76.2</b>							
507.cactuBSSN_r	6	201	37.9	200	38.0	<b>200</b>	<b>38.0</b>							
508.namd_r	6	169	33.8	166	34.4	<b>166</b>	<b>34.3</b>							
510.parest_r	6	705	22.3	<b>720</b>	<b>21.8</b>	720	21.8							
511.povray_r	6	272	51.6	273	51.2	<b>272</b>	<b>51.4</b>							
519.lbm_r	6	364	17.4	<b>364</b>	<b>17.4</b>	364	17.4							
521.wrf_r	6	357	37.7	<b>356</b>	<b>37.7</b>	356	37.7							
526.blender_r	6	224	40.8	224	40.8	<b>224</b>	<b>40.8</b>							
527.cam4_r	6	<b>219</b>	<b>48.0</b>	220	47.7	218	48.1							
538.imagick_r	6	134	111	139	108	<b>134</b>	<b>111</b>							
544.nab_r	6	148	68.2	147	68.8	<b>147</b>	<b>68.6</b>							
549.fotonik3d_r	6	1044	22.4	1043	22.4	<b>1043</b>	<b>22.4</b>							
554.roms_r	6	589	16.2	<b>590</b>	<b>16.2</b>	596	16.0							

SPECrate®2017\_fp\_base = 38.4

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 38.4

Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Mar-2020  
Hardware Availability: Jan-2020  
Software Availability: Sep-2019

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling  
Intel Virtualization Technology (Intel VT): Disabled  
Intel Hyper-Threading: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on r110j1 Mon Mar 16 08:02:03 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2286G CPU @ 4.00GHz
 1 "physical id"s (chips)
 6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
```

From lspcu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 6
On-line CPU(s) list: 0-5
Thread(s) per core: 1
Core(s) per socket: 6
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 38.4

Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

Model: 158
Model name: Intel(R) Xeon(R) E-2286G CPU @ 4.00GHz
Stepping: 10
CPU MHz: 4899.414
CPU max MHz: 4900.0000
CPU min MHz: 800.0000
BogoMIPS: 8016.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 12288K
NUMA node0 CPU(s): 0-5
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdc cmov pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch epb invpcid_single intel_pt ssbd
ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec
xgetbv1 dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp md_clear
spec_ctrl intel_stibp flush_lld

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 32617 MB
node 0 free: 31407 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 32790636 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 38.4

### Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Sep-2019

## Platform Notes (Continued)

```
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

```
uname -a:
Linux r110j1 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Mitigation: PTE Inversion
Microarchitectural Data Sampling:      Mitigation: Clear CPU buffers; SMT disabled
CVE-2017-5754 (Meltdown):               Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, usercopy/swaps
barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full retpoline, IBPB
```

```
run-level 3 Mar 16 07:56
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  908G   43G  819G   5% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      NEC U43 12/06/2019
Vendor:    NEC
Product:   Express5800/R110j-1
Serial:    CN69380JHR
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 2x UNKNOWN NOT AVAILABLE
 2x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666
```

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 38.4

Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Sep-2019

### Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 38.4

Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Sep-2019

### Compiler Version Notes (Continued)

-----  
=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

### Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 38.4

Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Mar-2020  
**Hardware Availability:** Jan-2020  
**Software Availability:** Sep-2019

## Base Portability Flags (Continued)

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

### C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

### Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

### Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

### Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

### Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-R110j-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-R110j-RevD.xml>





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 38.4

Express5800/R110j-1 (Intel Xeon E-2286G)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Mar-2020

**Hardware Availability:** Jan-2020

**Software Availability:** Sep-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-15 19:02:02-0400.

Report generated on 2020-04-14 14:01:49 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.