



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2020

Hardware Availability: Mar-2020

Software Availability: Sep-2019

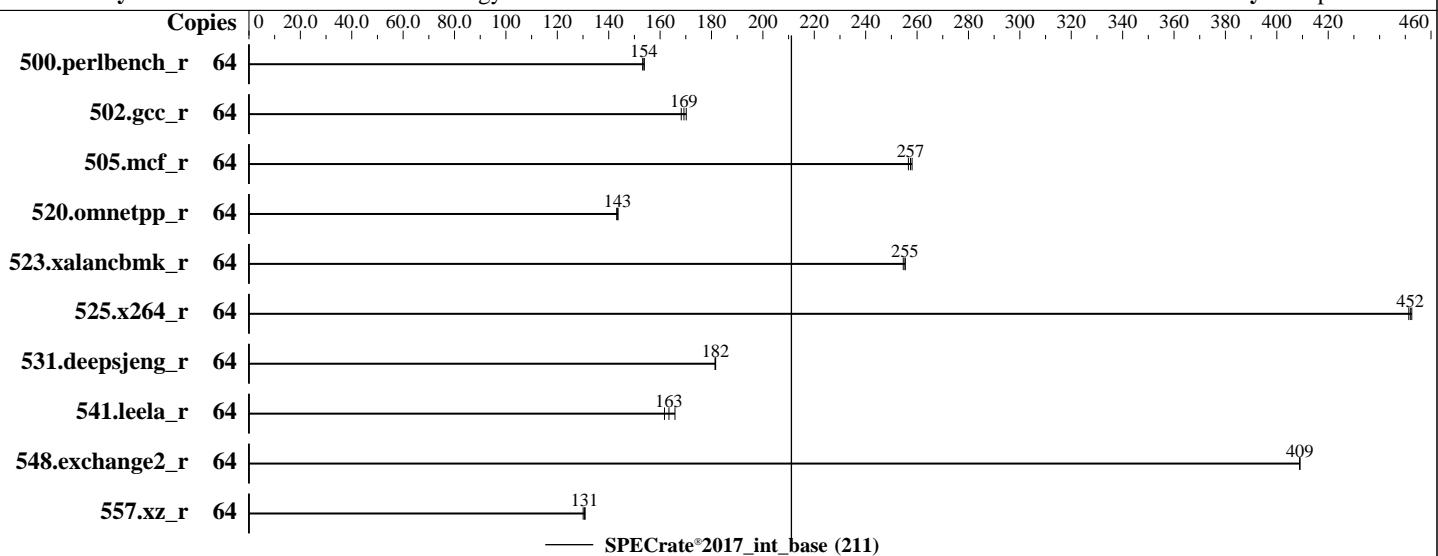

### Hardware

CPU Name: Intel Xeon Gold 6226R  
Max MHz: 3900  
Nominal: 2900  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 800 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
Compiler: Kernel 4.12.14-195-default  
C/C++: Version 19.0.5.281 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 19.0.5.281 of Intel Fortran  
Compiler for Linux  
Parallel: No  
Firmware: Lenovo BIOS Version TEE152L 2.51 released Feb-2020 tested as TEE151L 2.51 Jan-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Results Table

| Benchmark       | Base   |            |            |            |            |            |            |        | Peak    |       |         |       |         |       |         |       |
|-----------------|--------|------------|------------|------------|------------|------------|------------|--------|---------|-------|---------|-------|---------|-------|---------|-------|
|                 | Copies | Seconds    | Ratio      | Seconds    | Ratio      | Seconds    | Ratio      | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 64     | <b>663</b> | <b>154</b> | 662        | 154        | 665        | 153        |        |         |       |         |       |         |       |         |       |
| 502.gcc_r       | 64     | 533        | 170        | <b>535</b> | <b>169</b> | 539        | 168        |        |         |       |         |       |         |       |         |       |
| 505.mcf_r       | 64     | <b>402</b> | <b>257</b> | 401        | 258        | 403        | 257        |        |         |       |         |       |         |       |         |       |
| 520.omnetpp_r   | 64     | 585        | 144        | <b>585</b> | <b>143</b> | 587        | 143        |        |         |       |         |       |         |       |         |       |
| 523.xalancbmk_r | 64     | 265        | 255        | 265        | 255        | <b>265</b> | <b>255</b> |        |         |       |         |       |         |       |         |       |
| 525.x264_r      | 64     | <b>248</b> | <b>452</b> | 248        | 451        | 248        | 453        |        |         |       |         |       |         |       |         |       |
| 531.deepsjeng_r | 64     | 404        | 182        | <b>404</b> | <b>182</b> | 404        | 181        |        |         |       |         |       |         |       |         |       |
| 541.leela_r     | 64     | 639        | 166        | 655        | 162        | <b>648</b> | <b>163</b> |        |         |       |         |       |         |       |         |       |
| 548.exchange2_r | 64     | <b>410</b> | <b>409</b> | 410        | 409        | 410        | 409        |        |         |       |         |       |         |       |         |       |
| 557.xz_r        | 64     | <b>529</b> | <b>131</b> | 531        | 130        | 528        | 131        |        |         |       |         |       |         |       |         |       |

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.0-ic19.0u5/lib/intel64:/home/cpu2017-1.1.0-ic19.0u5/1
ib/ia32:/home/cpu2017-1.1.0-ic19.0u5/je5.0.1-32"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## General Notes (Continued)

numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
DCU Streamer Prefetcher set to Disable

MONITOR/MWAIT set to Enable

SNC set to Enable

Sysinfo program /home/cpu2017-1.1.0-ic19.0u5/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on linux-yb89 Tue Mar 17 15:09:06 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
        2 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        46 bits physical, 48 bits virtual
CPU(s):              64
On-line CPU(s) list: 0-63
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Platform Notes (Continued)

Thread(s) per core: 2  
Core(s) per socket: 16  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz  
Stepping: 7  
CPU MHz: 2900.000  
CPU max MHz: 3900.0000  
CPU min MHz: 1200.0000  
BogoMIPS: 5800.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 22528K  
NUMA node0 CPU(s): 0-3,8-11,32-35,40-43  
NUMA node1 CPU(s): 4-7,12-15,36-39,44-47  
NUMA node2 CPU(s): 16-19,24-27,48-51,56-59  
NUMA node3 CPU(s): 20-23,28-31,52-55,60-63  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bm1l hle avx2 smep bmi2 erms invpcid rtm cqm mpn rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_lld arch\_capabilities

/proc/cpuinfo cache data  
cache size : 22528 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43  
node 0 size: 96385 MB  
node 0 free: 96044 MB  
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47  
node 1 size: 96764 MB  
node 1 free: 96541 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Platform Notes (Continued)

```
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59
node 2 size: 96764 MB
node 2 free: 96380 MB
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 96734 MB
node 3 free: 96494 MB
node distances:
node    0    1    2    3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:           395928896 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:
Linux linux-yb89 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Mar 17 15:08

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u5
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Platform Notes (Continued)

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda3  | xfs  | 744G | 21G  | 724G  | 3%   | /          |

```
From /sys/devices/virtual/dmi/id
  BIOS:      Lenovo -[TEE151L-2.51]- 01/13/2020
  Vendor:    Lenovo
  Product:   THINKSYSTEM SD530 -[7X2104Z000]-
  Product Family: ThinkSystem
  Serial:   1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
 4x NO DIMM NO DIMM
 12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
       | 525.x264_r(base) 557.xz_r(base)
=====
```

```
-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
  NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
       | 541.leela_r(base)
=====
```

```
-----
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
  NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 548.exchange2_r(base)
=====
```

```
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Compiler Version Notes (Continued)

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fno-math-errno  
-mfpmath=sse -funroll-loops -qnextgen -fuse-lld=gold  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -fno-math-errno -mfpmath=sse  
-funroll-loops -qnextgen -fuse-lld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.5.281/linux/compiler/lib/intel64\_lin  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530  
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017\_int\_base = 211

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-17 03:09:05-0400.

Report generated on 2020-04-14 14:15:44 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.