



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

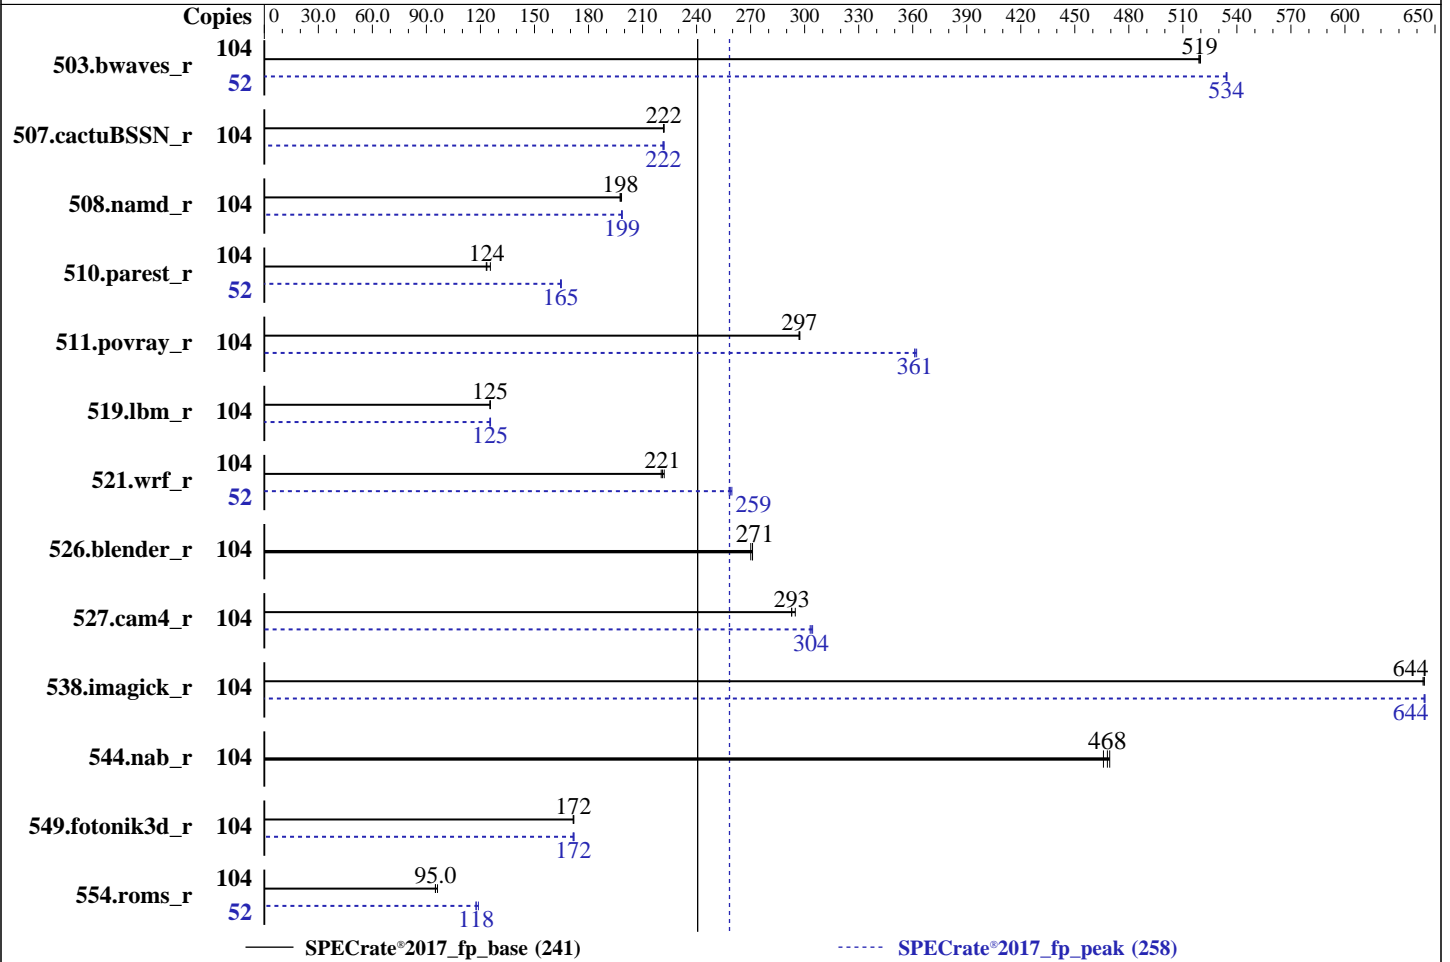

### Hardware

CPU Name: Intel Xeon Gold 6230R  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 52 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
 Kernel 3.10.0-1062.1.1.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: NEC BIOS Version U32 v2.32 03/09/2020 released Jun-2020  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Sep-2019

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	2010	519	<b>2008</b>	<b>519</b>	2006	520	52	976	534	976	534	<b>976</b>	<b>534</b>
507.cactuBSSN_r	104	594	222	593	222	<b>594</b>	<b>222</b>	104	<b>594</b>	<b>222</b>	595	221	593	222
508.namd_r	104	500	198	498	198	<b>499</b>	<b>198</b>	104	497	199	<b>497</b>	<b>199</b>	498	198
510.parest_r	104	2168	126	<b>2202</b>	<b>124</b>	2208	123	52	827	164	825	165	<b>826</b>	<b>165</b>
511.povray_r	104	<b>817</b>	<b>297</b>	817	297	818	297	104	<b>672</b>	<b>361</b>	672	361	670	362
519.lbm_r	104	874	125	<b>874</b>	<b>125</b>	874	125	104	873	126	875	125	<b>875</b>	<b>125</b>
521.wrf_r	104	1049	222	<b>1054</b>	<b>221</b>	1057	220	52	451	258	<b>450</b>	<b>259</b>	449	260
526.blender_r	104	584	271	586	270	<b>584</b>	<b>271</b>	104	584	271	586	270	<b>584</b>	<b>271</b>
527.cam4_r	104	621	293	617	295	<b>621</b>	<b>293</b>	104	<b>599</b>	<b>304</b>	597	304	600	303
538.imagick_r	104	402	643	402	644	<b>402</b>	<b>644</b>	104	<b>401</b>	<b>644</b>	402	644	401	644
544.nab_r	104	373	469	<b>374</b>	<b>468</b>	376	466	104	373	469	<b>374</b>	<b>468</b>	376	466
549.fotonik3d_r	104	<b>2361</b>	<b>172</b>	2364	171	2358	172	104	<b>2360</b>	<b>172</b>	2364	171	2357	172
554.roms_r	104	1740	95.0	1719	96.2	<b>1739</b>	<b>95.0</b>	52	695	119	<b>702</b>	<b>118</b>	703	118

SPECrate®2017\_fp\_base = 241

SPECrate®2017\_fp\_peak = 258

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

### General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:

- Thermal Configuration: Maximum Cooling
- Workload Profile: General Throughput Compute
- Memory Patrol Scrubbing: Disabled
- LLC Dead Line Allocation: Disabled
- LLC Prefetch: Enabled
- Enhanced Processor Performance: Enabled
- Workload Profile: Custom
- Advanced Memory Protection: Advanced ECC Support

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on rl20h1m Fri Jul 17 19:52:59 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz
 2 "physical id"s (chips)
104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 26
siblings       : 52
physical 0:    cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
physical 1:    cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

```

From lscpu:

```

Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2020  
**Hardware Availability:** May-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

CPU(s): 104
On-line CPU(s) list: 0-103
Thread(s) per core: 2
Core(s) per socket: 26
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6230R CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2100.000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-12,52-64
NUMA node1 CPU(s): 13-25,65-77
NUMA node2 CPU(s): 26-38,78-90
NUMA node3 CPU(s): 39-51,91-103
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp
flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 52 53 54 55 56 57 58 59 60 61 62 63 64
node 0 size: 97960 MB
node 0 free: 95490 MB
node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 65 66 67 68 69 70 71 72 73 74 75 76
77
node 1 size: 98304 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2020  
**Hardware Availability:** May-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

node 1 free: 95935 MB
node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 78 79 80 81 82 83 84 85 86 87 88 89
90
node 2 size: 98304 MB
node 2 free: 95962 MB
node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 91 92 93 94 95 96 97 98 99 100 101
102 103
node 3 size: 98303 MB
node 3 free: 95985 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      395912652 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server

```

```

uname -a:
Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

#### Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, usercopy/swaps

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2020  
**Hardware Availability:** May-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): barriers and \_\_user pointer sanitization  
Mitigation: Full retpoline, IBPB

run-level 3 Jul 17 19:47

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	908G	179G	683G	21%	/

From /sys/devices/virtual/dmi/id  
BIOS: NEC U32 03/09/2020  
Vendor: NEC  
Product: Express5800/R120h-1M  
Serial: JPN0084094

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
24x HPE P03050-091 16 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====
C++, C   | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Jul-2020  
**Hardware Availability:** May-2020  
**Software Availability:** Sep-2019

### Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

## Base Compiler Invocation (Continued)

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Jul-2020

**Hardware Availability:** May-2020

**Software Availability:** Sep-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017\_fp\_base = 241

Express5800/R120h-1M (Intel Xeon Gold 6230R)

SPECrate®2017\_fp\_peak = 258

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nonstandard-realloc-lhs -align array32byte
```

```
549.fotonik3d_r: Same as 503.bwaves_r
```

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nonstandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nonstandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECrate®2017\_fp\_base = 241**

**Express5800/R120h-1M (Intel Xeon Gold 6230R)**

**SPECrate®2017\_fp\_peak = 258**

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Jul-2020

**Hardware Availability:** May-2020

**Software Availability:** Sep-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-07-17 06:52:58-0400.

Report generated on 2020-09-01 19:14:47 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-01.