



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

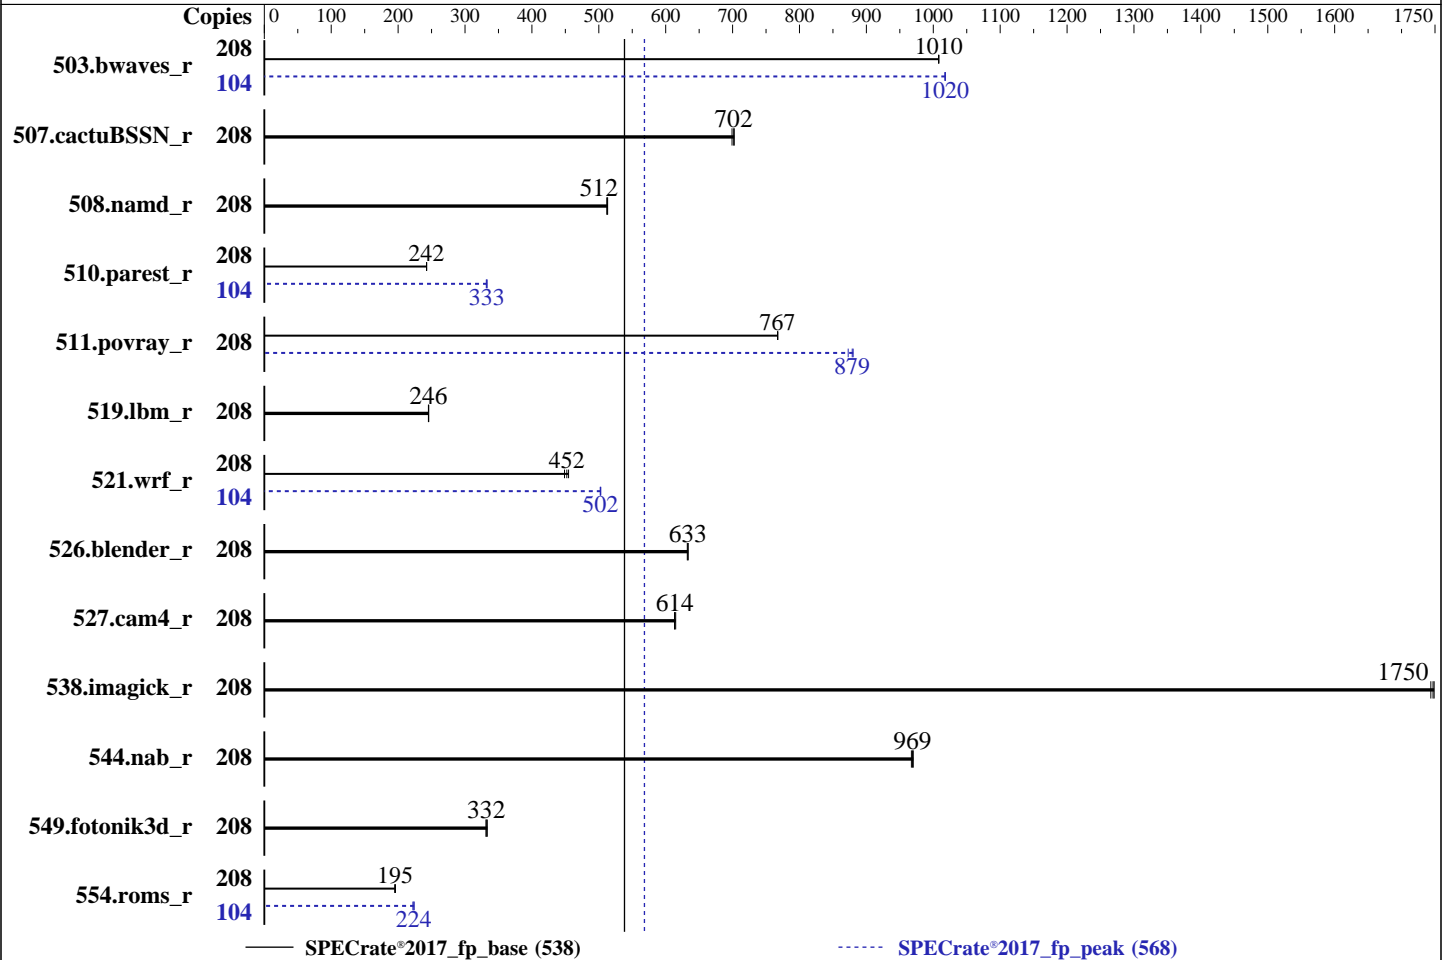

### Hardware

CPU Name: Intel Xeon Platinum 8270  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 104 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.1 (Ootpa) 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux  
 Parallel: No  
 Firmware: Version 4.1.8 released Jun-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	208	2069	1010	<b>2069</b>	<b>1010</b>	2069	1010	104	1024	1020	<b>1025</b>	<b>1020</b>	1025	1020
507.cactuBSSN_r	208	377	699	<b>375</b>	<b>702</b>	375	702	208	377	699	<b>375</b>	<b>702</b>	375	702
508.namd_r	208	<b>386</b>	<b>512</b>	386	512	385	513	208	<b>386</b>	<b>512</b>	386	512	385	513
510.parest_r	208	<b>2244</b>	<b>242</b>	2244	242	2242	243	104	820	332	817	333	<b>818</b>	<b>333</b>
511.povray_r	208	633	767	<b>633</b>	<b>767</b>	633	768	208	556	873	552	880	<b>553</b>	<b>879</b>
519.lbm_r	208	892	246	894	245	<b>893</b>	<b>246</b>	208	892	246	894	245	<b>893</b>	<b>246</b>
521.wrf_r	208	1024	455	1038	449	<b>1030</b>	<b>452</b>	104	463	503	<b>464</b>	<b>502</b>	464	502
526.blender_r	208	500	634	<b>500</b>	<b>633</b>	501	632	208	500	634	<b>500</b>	<b>633</b>	501	632
527.cam4_r	208	592	615	<b>593</b>	<b>614</b>	593	613	208	592	615	<b>593</b>	<b>614</b>	593	613
538.imagick_r	208	<b>296</b>	<b>1750</b>	297	1740	296	1750	208	<b>296</b>	<b>1750</b>	297	1740	296	1750
544.nab_r	208	<b>361</b>	<b>969</b>	361	970	362	967	208	<b>361</b>	<b>969</b>	361	970	362	967
549.fotonik3d_r	208	2432	333	2446	331	<b>2443</b>	<b>332</b>	208	2432	333	2446	331	<b>2443</b>	<b>332</b>
554.roms_r	208	1686	196	1695	195	<b>1691</b>	<b>195</b>	104	738	224	<b>739</b>	<b>224</b>	744	222

SPECrate®2017\_fp\_base = **538**

SPECrate®2017\_fp\_peak = **568**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
SCALING\_GOVERNOR set to Performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Inspur Corporation**

**SPECrate®2017\_fp\_base = 538**

**Inspur NF8260M5 (Intel Xeon Platinum 8270)**

**SPECrate®2017\_fp\_peak = 568**

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Aug-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5,  
and the system compiler gcc 4.8.5;  
sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
C1E Support set to Disable  
IMC (Integrated memory controller) Interleaving set to 1-way  
Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Sat Aug 29 05:12:21 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz  
4 "physical id"s (chips)  
208 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

**CPU2017 License:** 3358  
**Test Sponsor:** Inspur Corporation  
**Tested by:** Inspur Corporation

**Test Date:** Aug-2020  
**Hardware Availability:** Apr-2019  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

```
cpu cores : 26
siblings  : 52
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 208
On-line CPU(s) list:   0-207
Thread(s) per core:    2
Core(s) per socket:    26
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
Stepping:               5
CPU MHz:                3400.002
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:               5400.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0-3,7-9,13-15,20-22,104-107,111-113,117-119,124-126
NUMA node1 CPU(s):     4-6,10-12,16-19,23-25,108-110,114-116,120-123,127-129
NUMA node2 CPU(s):     26-29,33-35,39-41,46-48,130-133,137-139,143-145,150-152
NUMA node3 CPU(s):     30-32,36-38,42-45,49-51,134-136,140-142,146-149,153-155
NUMA node4 CPU(s):     52-55,59-61,65-67,72-74,156-159,163-165,169-171,176-178
NUMA node5 CPU(s):     56-58,62-64,68-71,75-77,160-162,166-168,172-175,179-181
NUMA node6 CPU(s):     78-81,85-87,91-93,98-100,182-185,189-191,195-197,202-204
NUMA node7 CPU(s):     82-84,88-90,94-97,101-103,186-188,192-194,198-201,205-207
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

### Platform Notes (Continued)

```
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 104 105 106 107 111 112 113 117 118 119
124 125 126
node 0 size: 192093 MB
node 0 free: 191707 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 108 109 110 114 115 116 120 121 122
123 127 128 129
node 1 size: 193505 MB
node 1 free: 193270 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 130 131 132 133 137 138 139 143 144
145 150 151 152
node 2 size: 193530 MB
node 2 free: 193383 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 134 135 136 140 141 142 146 147 148
149 153 154 155
node 3 size: 193530 MB
node 3 free: 193379 MB
node 4 cpus: 52 53 54 55 59 60 61 65 66 67 72 73 74 156 157 158 159 163 164 165 169 170
171 176 177 178
node 4 size: 193530 MB
node 4 free: 193374 MB
node 5 cpus: 56 57 58 62 63 64 68 69 70 71 75 76 77 160 161 162 166 167 168 172 173 174
175 179 180 181
node 5 size: 193530 MB
node 5 free: 193371 MB
node 6 cpus: 78 79 80 81 85 86 87 91 92 93 98 99 100 182 183 184 185 189 190 191 195
196 197 202 203 204
node 6 size: 193530 MB
node 6 free: 193384 MB
node 7 cpus: 82 83 84 88 89 90 94 95 96 97 101 102 103 186 187 188 192 193 194 198 199
200 201 205 206 207
node 7 size: 193528 MB
node 7 free: 193379 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

### Platform Notes (Continued)

node	0	1	2	3	4	5	6	7
0:	10	11	21	21	21	21	21	21
1:	11	10	21	21	21	21	21	21
2:	21	21	10	11	21	21	21	21
3:	21	21	11	10	21	21	21	21
4:	21	21	21	21	10	11	21	21
5:	21	21	21	21	11	10	21	21
6:	21	21	21	21	21	21	10	11
7:	21	21	21	21	21	21	11	10

From /proc/meminfo

```
MemTotal:      1583903768 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Vulnerable: Clear CPU buffers attempted, no
                                          microcode; SMT vulnerable

CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
                                          pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full generic retpoline, IBPB:
                                          conditional, IBRS_FW, STIBP: conditional, RSB
                                          filling
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

### Platform Notes (Continued)

run-level 3 Aug 29 05:12 last=5

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xf	838G	14G	825G	2%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 4.1.8 06/11/2019

Vendor: Inspur

Product: NF8260M5

Serial: 220714936

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4G43AB3-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
=====
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

**CPU2017 License:** 3358

**Test Sponsor:** Inspur Corporation

**Tested by:** Inspur Corporation

**Test Date:** Aug-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

### Compiler Version Notes (Continued)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

### Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

=====  
Fortran, C | 521.wrf\_r(peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Base Portability Flags (Continued)

544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

Fortran benchmarks:

503.bwaves\_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX2 -O3 -ipo

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs

-align array32byte -auto -mbranches-within-32B-boundaries

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

-nostandard-realloc-lhs -align array32byte -auto

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 538

Inspur NF8260M5 (Intel Xeon Platinum 8270)

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-29 05:12:20-0400.

Report generated on 2020-09-15 14:35:25 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-15.