



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177


Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

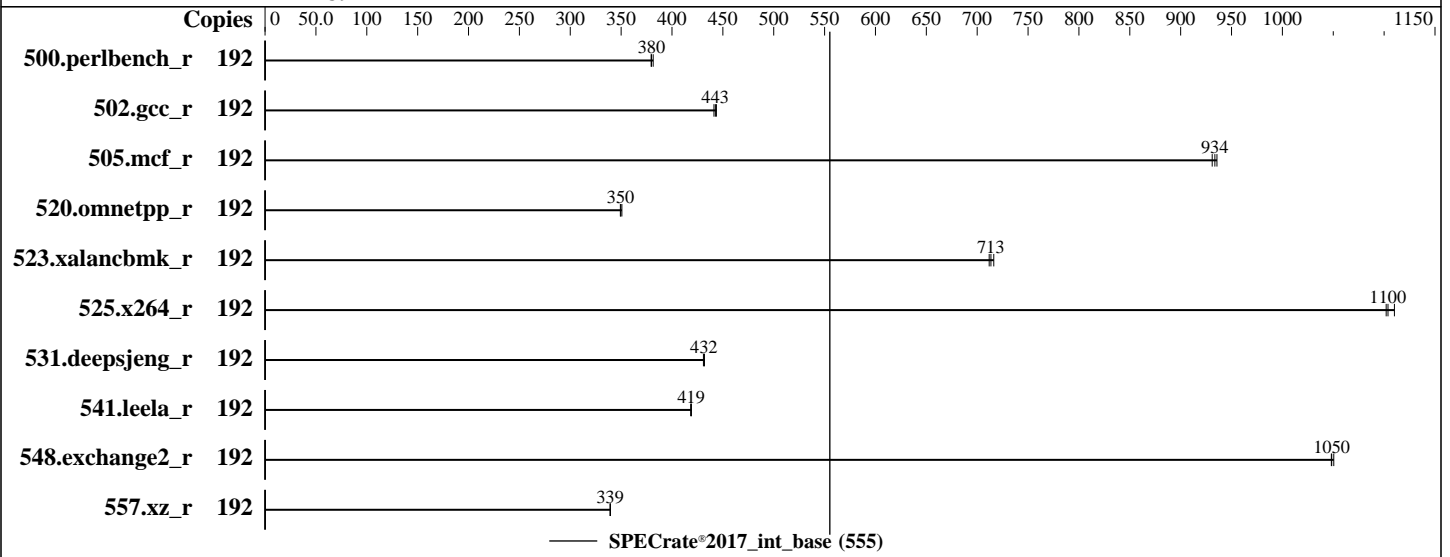

Hardware

CPU Name: Intel Xeon Gold 6252N
 Max MHz: 3600
 Nominal: 2300
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 1200 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 6.83 released Jun-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	801	382	805	379	805	380							
502.gcc_r	192	614	443	613	444	616	441							
505.mcf_r	192	332	934	332	936	333	931							
520.omnetpp_r	192	718	351	721	349	721	350							
523.xalancbmk_r	192	285	712	283	716	284	713							
525.x264_r	192	303	1110	305	1100	305	1100							
531.deepsjeng_r	192	510	432	509	432	511	431							
541.leela_r	192	759	419	759	419	760	418							
548.exchange2_r	192	480	1050	479	1050	480	1050							
557.xz_r	192	611	339	611	339	611	339							

SPECrate®2017_int_base = 555

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
 "/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64
 4:/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32:
 /usr/local/jemalloc32-5.0.1"
MALLOCONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

General Notes

Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
 Power Policy Set to Performance
 SNC Set to Enabled
 IMC Interleaving Set to 1-way Interleave
 XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
 running on linux-mb4p Mon Aug 31 17:01:51 2020

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
 4 "physical id"s (chips)
 192 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 24
 siblings : 48
 physical 0: cores 0 1 2 3 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 25 26 27 28 29
 physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
 physical 2: cores 0 1 2 3 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 25 26 27 28 29
 physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:
 Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              192
On-line CPU(s) list: 0-191
Thread(s) per core:  2
Core(s) per socket:  24
Socket(s):           4
NUMA node(s):        8
Vendor ID:           GenuineIntel
CPU family:          6
Model:               85
Model name:          Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
Stepping:            7
CPU MHz:             2300.000
CPU max MHz:         3600.0000
CPU min MHz:         1000.0000
BogoMIPS:            4600.00
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            36608K
NUMA node0 CPU(s):  0-3,6-8,12-14,19,20,96-99,102-104,108-110,115,116
NUMA node1 CPU(s):  4,5,9-11,15-18,21-23,100,101,105-107,111-114,117-119
NUMA node2 CPU(s):  24-27,31,32,36-38,42-44,120-123,127,128,132-134,138-140
NUMA node3 CPU(s):  28-30,33-35,39-41,45-47,124-126,129-131,135-137,141-143
NUMA node4 CPU(s):  48-51,54-56,60-62,67,68,144-147,150-152,156-158,163,164
NUMA node5 CPU(s):  52,53,57-59,63-66,69-71,148,149,153-155,159-162,165-167
NUMA node6 CPU(s):  72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s):  76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 6 7 8 12 13 14 19 20 96 97 98 99 102 103 104 108 109 110 115 116

node 0 size: 95205 MB

node 0 free: 94669 MB

node 1 cpus: 4 5 9 10 11 15 16 17 18 21 22 23 100 101 105 106 107 111 112 113 114 117 118 119

node 1 size: 96763 MB

node 1 free: 96233 MB

node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 120 121 122 123 127 128 132 133 134 138 139 140

node 2 size: 96734 MB

node 2 free: 96427 MB

node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 124 125 126 129 130 131 135 136 137 141 142 143

node 3 size: 96763 MB

node 3 free: 96421 MB

node 4 cpus: 48 49 50 51 54 55 56 60 61 62 67 68 144 145 146 147 150 151 152 156 157 158 163 164

node 4 size: 96763 MB

node 4 free: 96507 MB

node 5 cpus: 52 53 57 58 59 63 64 65 66 69 70 71 148 149 153 154 155 159 160 161 162 165 166 167

node 5 size: 96763 MB

node 5 free: 96489 MB

node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182 183 187 188

node 6 size: 96763 MB

node 6 free: 96514 MB

node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186 189 190 191

node 7 size: 96543 MB

node 7 free: 96300 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	11	21	21	21	21	21	21
1:	11	10	21	21	21	21	21	21
2:	21	21	10	11	21	21	21	21
3:	21	21	11	10	21	21	21	21
4:	21	21	21	21	10	11	21	21
5:	21	21	21	21	11	10	21	21
6:	21	21	21	21	21	21	10	11
7:	21	21	21	21	21	21	11	10

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 790835828 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 4

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP4"

VERSION_ID="12.4"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:

Linux linux-mb4p 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected

Microarchitectural Data Sampling: No status reported

CVE-2017-5754 (Meltdown): Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Aug 31 17:01

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	883G	49G	835G	6%	/

From /sys/devices/virtual/dmi/id

BIOS: INSYDE Corp. 6.83 06/29/2019

Vendor: Huawei

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Platform Notes (Continued)

Product: 2488H V5
Product Family: Purley
Serial: Huawei

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)  
-----
```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====  
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
     | 541.leela_r(base)  
-----
```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====  
Fortran | 548.exchange2_r(base)  
-----
```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 555

Huawei 2488H V5 (Intel Xeon Gold 6252N)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Aug-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revB.html

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revB.xml

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-31 05:01:50-0400.

Report generated on 2020-10-30 14:52:10 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-15.