



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_base = 552

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2020

Hardware Availability: Jun-2020

Software Availability: Apr-2020

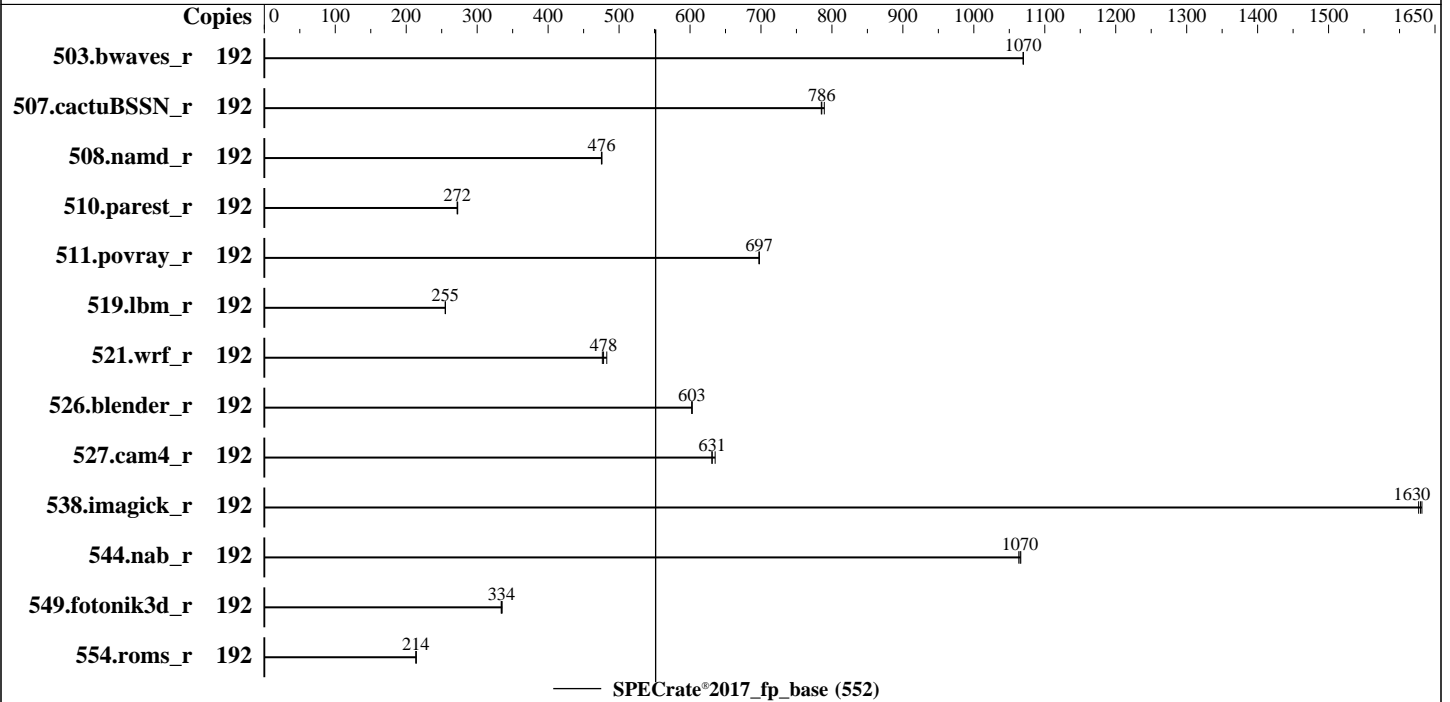

### Hardware

CPU Name: Intel Xeon Platinum 8268  
 Max MHz: 3900  
 Nominal: 2900  
 Enabled: 96 cores, 4 chips, 2 threads/core  
 Orderable: 4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
 Kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TEE156L 2.61 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Sep-2020  
Hardware Availability: Jun-2020  
Software Availability: Apr-2020

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	1800	1070	<b>1800</b>	<b>1070</b>	1800	1070							
507.cactuBSSN_r	192	<b>309</b>	<b>786</b>	308	789	310	785							
508.namd_r	192	<b>384</b>	<b>476</b>	383	476	384	475							
510.parest_r	192	1847	272	<b>1846</b>	<b>272</b>	1843	273							
511.povray_r	192	<b>643</b>	<b>697</b>	643	697	643	698							
519.lbm_r	192	<b>793</b>	<b>255</b>	793	255	794	255							
521.wrf_r	192	<b>900</b>	<b>478</b>	891	483	903	476							
526.blender_r	192	485	603	<b>485</b>	<b>603</b>	485	603							
527.cam4_r	192	528	635	532	631	<b>532</b>	<b>631</b>							
538.imagick_r	192	<b>293</b>	<b>1630</b>	293	1630	294	1630							
544.nab_r	192	<b>303</b>	<b>1070</b>	304	1060	303	1070							
549.fotonik3d_r	192	2241	334	<b>2238</b>	<b>334</b>	2232	335							
554.roms_r	192	1427	214	<b>1427</b>	<b>214</b>	1426	214							

SPECrate®2017\_fp\_base = 552

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.0-ic19.1.1/lib/intel64:/home/cpu2017-1.1.0-ic19.1.1/j  
e5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Apr-2020

### General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
 memory using Redhat Enterprise Linux 8.0  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
 Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
 MONITOR/MWAIT set to Enable  
 CPU P-state Control set to Cooperative  
 SNC set to Enable

Sysinfo program /home/cpu2017-1.1.0-ic19.1.1/bin/sysinfo  
 Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
 running on linux-qjkl Tue Sep 8 00:30:50 2020

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz  
 4 "physical id"s (chips)  
 192 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 24  
 siblings : 48  
 physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
 physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
 physical 2: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
 physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          46 bits physical, 48 bits virtual
CPU(s):                 192
On-line CPU(s) list:   0-191
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
Stepping:               7
CPU MHz:                2900.000
CPU max MHz:            3900.0000
CPU min MHz:            1200.0000
BogoMIPS:               5800.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0-3,7,8,12-14,18-20,96-99,103,104,108-110,114-116
NUMA node1 CPU(s):     4-6,9-11,15-17,21-23,100-102,105-107,111-113,117-119
NUMA node2 CPU(s):     24-27,31,32,36-38,42-44,120-123,127,128,132-134,138-140
NUMA node3 CPU(s):     28-30,33-35,39-41,45-47,124-126,129-131,135-137,141-143
NUMA node4 CPU(s):     48-51,55,56,60-62,66-68,144-147,151,152,156-158,162-164
NUMA node5 CPU(s):     52-54,57-59,63-65,69-71,148-150,153-155,159-161,165-167
NUMA node6 CPU(s):     72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s):     76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_l1d arch_capabilities

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 96 97 98 99 103 104 108 109 110 114 115 116
node 0 size: 193147 MB
node 0 free: 192739 MB
node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 100 101 102 105 106 107 111 112 113 117
118 119
node 1 size: 193501 MB
node 1 free: 193258 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 120 121 122 123 127 128 132 133 134
138 139 140
node 2 size: 193531 MB
node 2 free: 193305 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 124 125 126 129 130 131 135 136 137
141 142 143
node 3 size: 193531 MB
node 3 free: 193227 MB
node 4 cpus: 48 49 50 51 55 56 60 61 62 66 67 68 144 145 146 147 151 152 156 157 158
162 163 164
node 4 size: 193531 MB
node 4 free: 192942 MB
node 5 cpus: 52 53 54 57 58 59 63 64 65 69 70 71 148 149 150 153 154 155 159 160 161
165 166 167
node 5 size: 193531 MB
node 5 free: 193327 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 193531 MB
node 6 free: 193324 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 193529 MB
node 7 free: 193329 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 11 21 21 21 21 21 21
1:  11 10 21 21 21 21 21 21
2:  21 21 10 11 21 21 21 21
3:  21 21 11 10 21 21 21 21
4:  21 21 21 21 10 11 21 21
5:  21 21 21 21 11 10 21 21
6:  21 21 21 21 21 21 10 11
7:  21 21 21 21 21 21 11 10
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      1584983996 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-qjkl 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

run-level 3 Sep 8 00:27

SPEC is set to: /home/cpu2017-1.1.0-ic19.1.1

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3        xfs   892G   32G  860G   4% /
```

From /sys/devices/virtual/dmi/id

```
BIOS:      Lenovo  -[TEE156L-2.61]- 05/20/2020
Vendor:    Lenovo
Product:   ThinkSystem SR850P  -[7D2HCT01WW]-
Product Family: ThinkSystem
Serial:    1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

Benchmarks using both C and C++:  
icpc icc

Benchmarks using Fortran, C, and C++:  
icpc icc ifort





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2020

Hardware Availability: Jun-2020

Software Availability: Apr-2020

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 552

ThinkSystem SR850P  
(2.90 GHz, Intel Xeon Platinum 8268)

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-07 12:30:50-0400.

Report generated on 2020-09-29 15:25:10 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-29.