



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066


Test Date: Sep-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

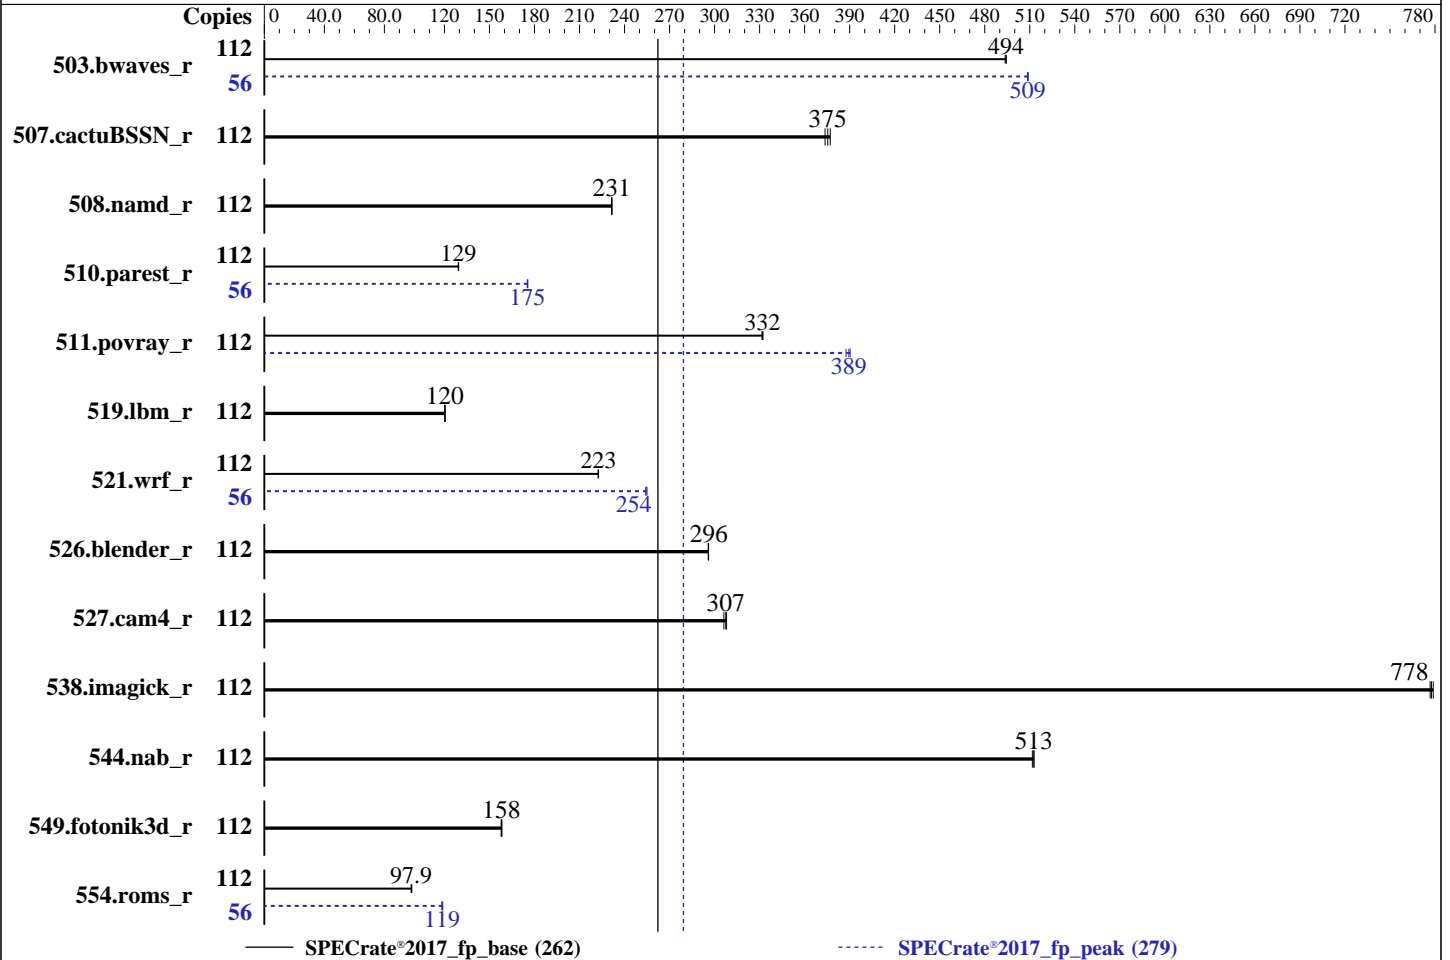

Hardware

CPU Name: Intel Xeon Gold 6238R
 Max MHz: 4000
 Nominal: 2200
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933V-R)
 Storage: 2 x 600 GB SAS HDD,10000RPM,RAID 1
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux
 Parallel: No
 Firmware: Version 2.00.33 released Aug-2019 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Date: Sep-2020

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2272	494	<u>2273</u>	<u>494</u>	2275	494	56	<u>1104</u>	<u>509</u>	1104	508	1103	509
507.cactuBSSN_r	112	376	377	380	374	378	375	112	376	377	380	374	378	375
508.namd_r	112	460	231	459	232	460	231	112	460	231	459	232	460	231
510.parest_r	112	2268	129	<u>2264</u>	<u>129</u>	2263	129	56	835	175	835	176	836	175
511.povray_r	112	789	332	787	332	788	332	112	675	388	671	389	670	390
519.lbm_r	112	981	120	981	120	981	120	112	981	120	981	120	981	120
521.wrf_r	112	1128	222	1127	223	1127	223	56	493	254	493	254	492	255
526.blender_r	112	576	296	576	296	577	296	112	576	296	576	296	577	296
527.cam4_r	112	637	307	636	308	640	306	112	637	307	636	308	640	306
538.imagick_r	112	359	777	358	779	358	778	112	359	777	358	779	358	778
544.nab_r	112	368	513	368	513	368	512	112	368	513	368	513	368	512
549.fotonik3d_r	112	2763	158	2765	158	2757	158	112	2763	158	2765	158	2757	158
554.roms_r	112	1818	97.9	1811	98.3	1817	97.9	56	748	119	752	118	751	119

SPECrate®2017_fp_base = 262

SPECrate®2017_fp_peak = 279

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

Set SNC to Enabled

Set IMC Interleaving to 1-way Interleave

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Tue Sep 15 02:08:33 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6238R CPU @ 2.20GHz
 2 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:  0-111
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Gold 6238R CPU @ 2.20GHz
Stepping:               7
CPU MHz:                1042.266
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              4400.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Platform Notes (Continued)

79

node 0 size: 46686 MB

node 0 free: 30856 MB

node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81 82 83

node 1 size: 48350 MB

node 1 free: 37449 MB

node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100 101 105 106 107

node 2 size: 48377 MB

node 2 free: 37412 MB

node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104 108 109 110 111

node 3 size: 48377 MB

node 3 free: 36131 MB

node distances:

node 0 1 2 3

0: 10 11 21 21

1: 11 10 21 21

2: 21 21 10 11

3: 21 21 11 10

From /proc/meminfo

MemTotal: 196395208 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.2"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Platform Notes (Continued)

```

itlb_multihit:                               KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):           Not affected
Microarchitectural Data Sampling:           Not affected
CVE-2017-5754 (Meltdown):                   Not affected
CVE-2018-3639 (Speculative Store Bypass):   Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):          Mitigation: usercopy/swaps barriers and __user
                                              pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling
tsx_async_abort:                             Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Sep 14 16:38

```

SPEC is set to: /home/speccpu

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   503G   57G  446G  12% /home

```

From /sys/devices/virtual/dmi/id

```

BIOS: American Megatrends Inc. 2.00.33 08/22/2019
Vendor: H3C
Product: RS33M2C9S
Product Family: Rack

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

6x Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933
12x NO DIMM NO DIMM
6x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====

```

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020
Hardware Availability: Mar-2020
Software Availability: Apr-2020

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020
Hardware Availability: Mar-2020
Software Availability: Apr-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

C++ benchmarks:

```

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Fortran benchmarks:

```

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Benchmarks using both Fortran and C:

```

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

Fortran benchmarks:

503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo

-no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs

-align array32byte -auto -mbranches-within-32B-boundaries

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3

-ipo -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-multiple-gather-scatter-by-shuffles

-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

-nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_fp_base = 262

H3C UniServer R4900 G3 (Intel Xeon Gold 6238R)

SPECrate®2017_fp_peak = 279

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

521.wrf_r (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-14 14:08:33-0400.

Report generated on 2020-11-10 15:20:03 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-10.