



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation


**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

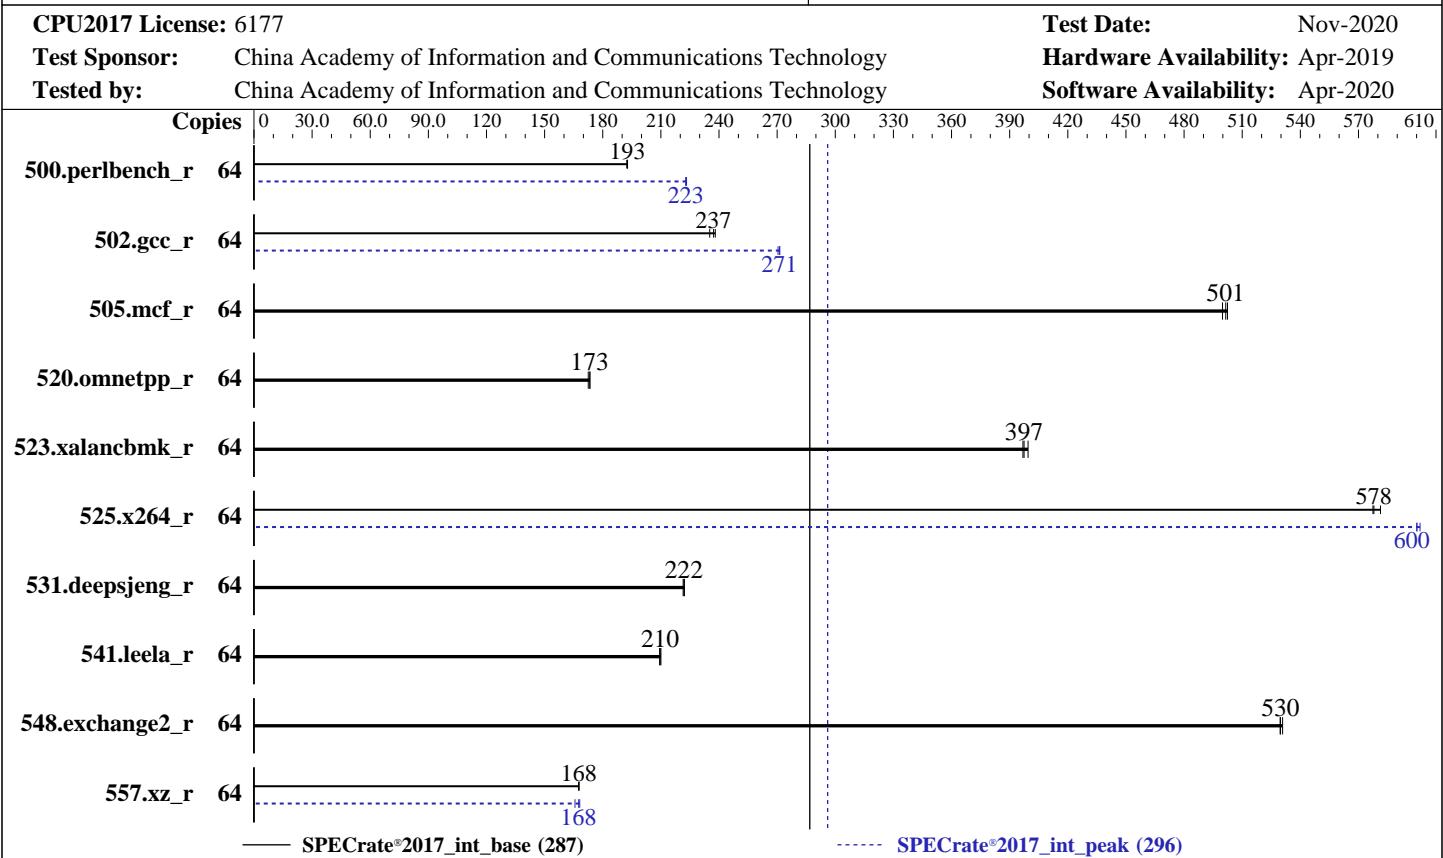

Hardware		Software	
CPU Name:	Intel Xeon Gold 6244	OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64)
Max MHz:	4400		Kernel 4.12.14-94.41-default
Nominal:	3600	Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
Enabled:	32 cores, 4 chips, 2 threads/core		Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Orderable:	2,4 chips	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 6.83 released Jun-2019
L2:	1 MB I+D on chip per core	File System:	xfs
L3:	24.75 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	736 GB (46 x 16 GB 2Rx4 PC4-2933Y-R)	Peak Pointers:	32/64-bit
Storage:	1 x 960 GB SATA SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS set to prefer performance at the cost of additional power usage.









# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECCrate®2017\_int\_base = 287**

**SPECCrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Platform Notes (Continued)

physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 4 6 32 33 36 38
node 0 size: 95207 MB
node 0 free: 94912 MB
node 1 cpus: 2 3 5 7 34 35 37 39
node 1 size: 96765 MB
node 1 free: 96434 MB
node 2 cpus: 8 9 10 13 40 41 42 45
node 2 size: 96765 MB
node 2 free: 96569 MB
node 3 cpus: 11 12 14 15 43 44 46 47
node 3 size: 64509 MB
node 3 free: 64342 MB
node 4 cpus: 16 17 19 23 48 49 51 55
node 4 size: 96736 MB
node 4 free: 96560 MB
node 5 cpus: 18 20 21 22 50 52 53 54
node 5 size: 96765 MB
node 5 free: 96590 MB
node 6 cpus: 24 25 28 30 56 57 60 62
node 6 size: 96765 MB
node 6 free: 96596 MB
node 7 cpus: 26 27 29 31 58 59 61 63
node 7 size: 96545 MB
node 7 free: 96388 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10
```

From /proc/meminfo

```
MemTotal:      757820780 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Platform Notes (Continued)

# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

**os-release:**

```
NAME="SLES"  
VERSION="12-SP4"  
VERSION_ID="12.4"  
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"  
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

**uname -a:**

```
Linux linux-mb4p 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)  
x86_64 x86_64 x86_64 GNU/Linux
```

**Kernel self-reported vulnerability status:**

<b>CVE-2018-3620 (L1 Terminal Fault):</b>	Not affected
<b>Microarchitectural Data Sampling:</b>	No status reported
<b>CVE-2017-5754 (Meltdown):</b>	Not affected
<b>CVE-2018-3639 (Speculative Store Bypass):</b>	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
<b>CVE-2017-5753 (Spectre variant 1):</b>	Mitigation: __user pointer sanitization
<b>CVE-2017-5715 (Spectre variant 2):</b>	Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Nov 6 18:36

**SPEC is set to:** /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	883G	75G	809G	9%	/

From /sys/devices/virtual/dmi/id

BIOS:	INSYDE Corp.	6.83	06/29/2019
Vendor:	Huawei		
Product:	2488H V5		
Product Family:	Purley		
Serial:	Huawei		

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

**Memory:**

2x NO DIMM NO DIMM
46x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

**(Continued on next page)**



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C      | 557.xz_r(peak)
-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
icc (NextGen): command line warning #10430: Unsupported command line options
encountered
These options as listed are not supported with the compiler selected.
For more information, use '-qnextgen-diag'.
option list:
-no-prec-div
-----

=====
C      | 500.perlbench_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

=====
C      | 502.gcc_r(peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 557.xz\_r(peak)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

icc (NextGen): command line warning #10430: Unsupported command line options  
encountered

These options as listed are not supported with the compiler selected.

For more information, use '-qnextgen-diag'.

option list:

-no-prec-div

=====

C | 500.perlbench\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 557.xz\_r(peak)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

icc (NextGen): command line warning #10430: Unsupported command line options  
encountered

These options as listed are not supported with the compiler selected.

For more information, use '-qnextgen-diag'.

option list:

-no-prec-div

=====

C | 500.perlbench\_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 557.xz\_r(peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

icc (NextGen): command line warning #10430: Unsupported command line options  
encountered

These options as listed are not supported with the compiler selected.

For more information, use '-qnextgen-diag'.

option list:

-no-prec-div

=====

C | 500.perlbench\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**SPECrate®2017\_int\_base = 287**

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -fnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-fuse-lld=gold -qopt-mem-layout-trans=4  
-L/opt/intel/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -fnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse  
-funroll-loops -fuse-lld=gold -qopt-mem-layout-trans=4  
-L/opt/intel/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/opt/intel/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin
-std=gnu89
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/
-ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECCrate®2017\_int\_base = 287**

**SPECCrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revB.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revB.html)

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.3.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revB.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revB.xml)

<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.3.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: China Academy of Information and Communications Technology)

**Huawei 2488H V5 (Intel Xeon Gold 6244)**

**SPECrate®2017\_int\_base = 287**

**SPECrate®2017\_int\_peak = 296**

**CPU2017 License:** 6177

**Test Sponsor:** China Academy of Information and Communications Technology

**Tested by:** China Academy of Information and Communications Technology

**Test Date:** Nov-2020

**Hardware Availability:** Apr-2019

**Software Availability:** Apr-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-06 05:37:48-0500.

Report generated on 2020-11-25 10:28:34 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-24.