



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 194

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

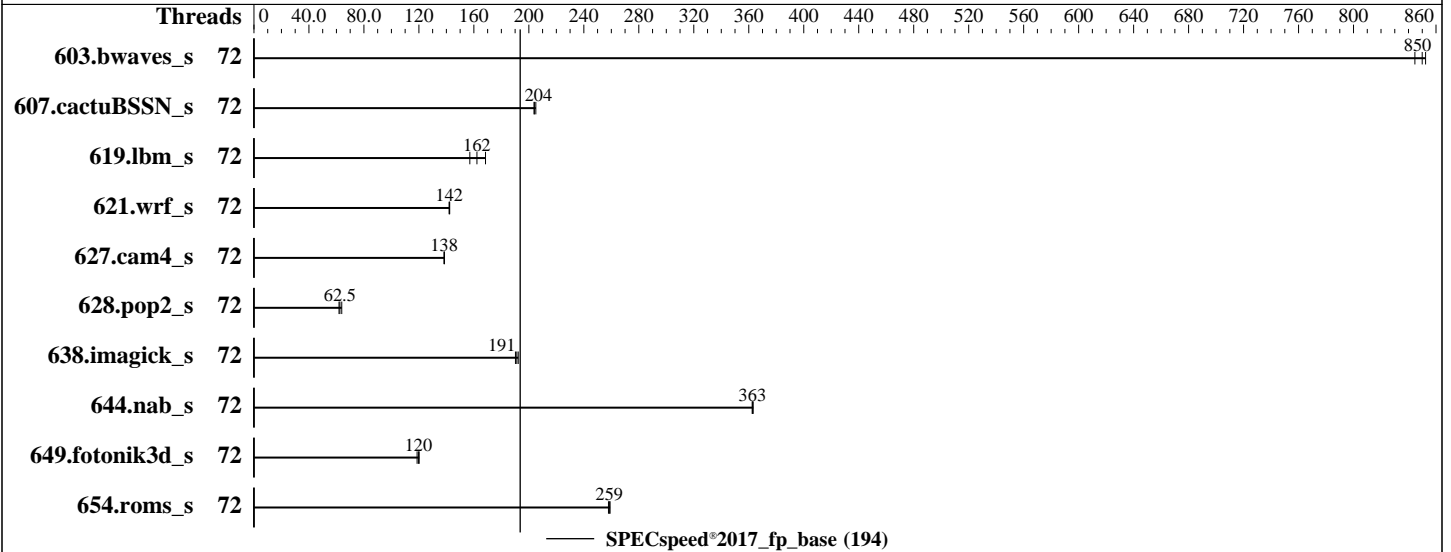

### Hardware

CPU Name: Intel Xeon Gold 6240  
 Max MHz: 3900  
 Nominal: 2600  
 Enabled: 72 cores, 4 chips  
 Orderable: 4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.0 (Ootpa)  
 Kernel 4.18.0-80.el8.x86\_64  
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.5.281 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version TEE156L 2.61 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 194

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Oct-2020  
Hardware Availability: Jun-2020  
Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	72	<b>69.4</b>	<b>850</b>	69.2	852	69.8	845							
607.cactuBSSN_s	72	81.8	204	<b>81.7</b>	<b>204</b>	81.3	205							
619.lbm_s	72	31.1	168	33.4	157	<b>32.3</b>	<b>162</b>							
621.wrf_s	72	92.9	142	<b>93.1</b>	<b>142</b>	93.1	142							
627.cam4_s	72	64.1	138	<b>64.0</b>	<b>138</b>	63.9	139							
628.pop2_s	72	186	63.9	192	61.9	<b>190</b>	<b>62.5</b>							
638.imagick_s	72	<b>75.4</b>	<b>191</b>	75.8	190	75.0	192							
644.nab_s	72	<b>48.2</b>	<b>363</b>	48.2	363	48.1	363							
649.fotonik3d_s	72	76.8	119	75.8	120	<b>76.2</b>	<b>120</b>							
654.roms_s	72	60.8	259	<b>60.9</b>	<b>259</b>	61.0	258							

SPECspeed®2017\_fp\_base = 194

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.0-ic19.0u5-2/lib/intel64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 194

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Sep-2019

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
MONITOR/MWAIT set to Enable  
Hyper-Threading set to Disable

Sysinfo program /home/cpu2017-1.1.0-ic19.0u5-2/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Tue Oct 27 22:30:16 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
 4 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 18
siblings       : 18
physical 0:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

```
From lscpu:
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          72
On-line CPU(s) list: 0-71
Thread(s) per core: 1
Core(s) per socket: 18
Socket(s):       4
NUMA node(s):   4
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
Stepping:        7
CPU MHz:         1902.708
CPU max MHz:     3900.0000
CPU min MHz:     1000.0000
BogoMIPS:        5200.00
Virtualization:  VT-x
L1d cache:       32K
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 194

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

### Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           1024K
L3 cache:           25344K
NUMA node0 CPU(s): 0-17
NUMA node1 CPU(s): 18-35
NUMA node2 CPU(s): 36-53
NUMA node3 CPU(s): 54-71
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
node 0 size: 386684 MB
node 0 free: 386189 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 1 size: 387068 MB
node 1 free: 386105 MB
node 2 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
node 2 size: 387043 MB
node 2 free: 386044 MB
node 3 cpus: 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 3 size: 387067 MB
node 3 free: 386318 MB
node distances:
node  0  1  2  3
 0:  10  21  21  21
 1:  21  10  21  21
 2:  21  21  10  21
 3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      1585012168 kB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_base = 194

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.0 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.0"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: No status reported
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
```

run-level 3 Oct 27 21:22

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u5-2

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 xfs 839G 47G 792G 6% /home
```

From /sys/devices/virtual/dmi/id

```
BIOS: Lenovo -[TEE156L-2.61]- 05/20/2020
Vendor: Lenovo
Product: ThinkSystem SR850P -[7D2HCTO1WW]-
Product Family: ThinkSystem
Serial: 1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_base = 194

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 194

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Sep-2019

## Compiler Version Notes (Continued)

Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-m64 -DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850P  
(2.60 GHz, Intel Xeon Gold 6240)

SPECspeed®2017\_fp\_base = 194

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2020

**Hardware Availability:** Jun-2020

**Software Availability:** Sep-2019

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-27 10:30:15-0400.

Report generated on 2020-11-25 10:29:54 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-24.