



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Oct-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

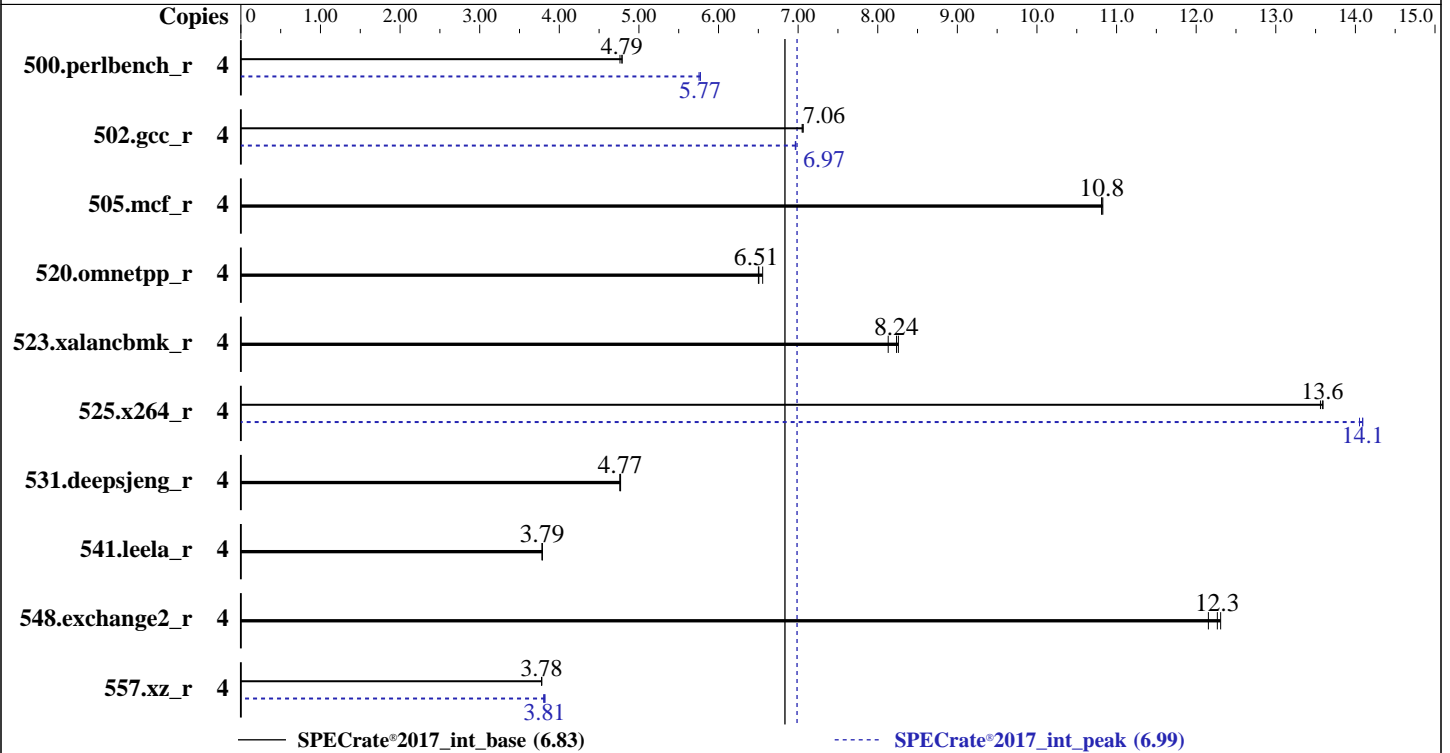

Hardware

CPU Name: Intel Xeon E-2224
 Max MHz: 4600
 Nominal: 3400
 Enabled: 4 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 8 MB I+D on chip per chip
 Other: None
 Memory: 32 GB (1 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x 400 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.1 (Ootpa) 4.18.0-147.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux
 Parallel: No
 Firmware: Version 4.4.0 released Apr-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Oct-2020
Hardware Availability: Apr-2019
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	1337	4.76	1330	4.79	<u>1331</u>	<u>4.79</u>	4	<u>1104</u>	<u>5.77</u>	1107	5.75	1103	5.77
502.gcc_r	4	802	7.06	803	7.05	<u>802</u>	<u>7.06</u>	4	<u>813</u>	<u>6.97</u>	813	6.96	812	6.97
505.mcf_r	4	598	10.8	<u>598</u>	<u>10.8</u>	597	10.8	4	598	10.8	<u>598</u>	<u>10.8</u>	597	10.8
520.omnetpp_r	4	807	6.50	801	6.55	<u>807</u>	<u>6.51</u>	4	807	6.50	801	6.55	<u>807</u>	<u>6.51</u>
523.xalancbmk_r	4	511	8.26	<u>513</u>	<u>8.24</u>	519	8.13	4	511	8.26	<u>513</u>	<u>8.24</u>	519	8.13
525.x264_r	4	515	13.6	516	13.6	<u>516</u>	<u>13.6</u>	4	497	14.1	<u>497</u>	<u>14.1</u>	498	14.1
531.deepsjeng_r	4	961	4.77	963	4.76	<u>962</u>	<u>4.77</u>	4	961	4.77	963	4.76	<u>962</u>	<u>4.77</u>
541.leela_r	4	<u>1750</u>	<u>3.79</u>	1749	3.79	1750	3.78	4	<u>1750</u>	<u>3.79</u>	1749	3.79	1750	3.78
548.exchange2_r	4	862	12.2	<u>854</u>	<u>12.3</u>	852	12.3	4	862	12.2	<u>854</u>	<u>12.3</u>	852	12.3
557.xz_r	4	1144	3.78	<u>1144</u>	<u>3.78</u>	1143	3.78	4	1131	3.82	1136	3.80	<u>1133</u>	<u>3.81</u>

SPECrate®2017_int_base = **6.83**

SPECrate®2017_int_peak = **6.99**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux. The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Oct-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5,

and the system compiler gcc 4.8.5;

sources available from jemalloc.net or

<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Thu Oct 29 00:04:45 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2224 CPU @ 3.40GHz
```

```
1 "physical id"s (chips)
```

```
4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
```

```
siblings : 4
```

```
physical 0: cores 0 1 2 3
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Oct-2020
Hardware Availability: Apr-2019
Software Availability: Apr-2020

Platform Notes (Continued)

```

From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                4
On-line CPU(s) list:  0-3
Thread(s) per core:    1
Core(s) per socket:    4
Socket(s):              1
NUMA node(s):          1
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 158
Model name:             Intel(R) Xeon(R) E-2224 CPU @ 3.40GHz
Stepping:               10
CPU MHz:                800.014
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:               6816.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               256K
L3 cache:               8192K
NUMA node0 CPU(s):     0-3
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault invpcid_single pti
ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt
xsavec xgetbv1 xsaves dtherm arat pln pts hwp hwp_notify hwp_act_window hwp_opp
md_clear flush_l1d

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 32075 MB
node 0 free: 22611 MB
node distances:
node    0

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Oct-2020
Hardware Availability: Apr-2019
Software Availability: Apr-2020

Platform Notes (Continued)

0: 10

From /proc/meminfo

MemTotal: 32845296 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:

Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Mitigation: PTE Inversion; VMX: conditional cache flushes, SMT disabled
Microarchitectural Data Sampling: Mitigation: Clear CPU buffers; SMT disabled
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full generic retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling

run-level 3 Oct 29 11:54

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	380G	10G	370G	3%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. NF3120M5_BIOS_4.4.0 04/20/2020

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Oct-2020
Hardware Availability: Apr-2019
Software Availability: Apr-2020

Platform Notes (Continued)

Vendor: Inspur
Product: NF3120M5
Product Family: Server
Serial: 220910775

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x Not Specified Not Specified
1x Samsung M391A4G43AB1-CVF 32767 MB 2 rank 2933

(End of data from sysinfo program)

This system support 4 DIMMs.
1 DIMM slots installed with 32 GB DIMM for this run,
and running at 2400 due to CPU limitation.

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Oct-2020
Hardware Availability: Apr-2019
Software Availability: Apr-2020

Compiler Version Notes (Continued)

C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Oct-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Compiler Version Notes (Continued)

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

```

```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran  | 548.exchange2_r(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```




SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Oct-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallocc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallocc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallocc
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Oct-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Peak Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin
-std=gnu89
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017_int_base = 6.83

Inspur NF3120M5 (Intel Xeon E-2224)

SPECrate®2017_int_peak = 6.99

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Oct-2020

Hardware Availability: Apr-2019

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-29 00:04:42-0400.

Report generated on 2020-11-25 10:31:33 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-24.