



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 665

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177


Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

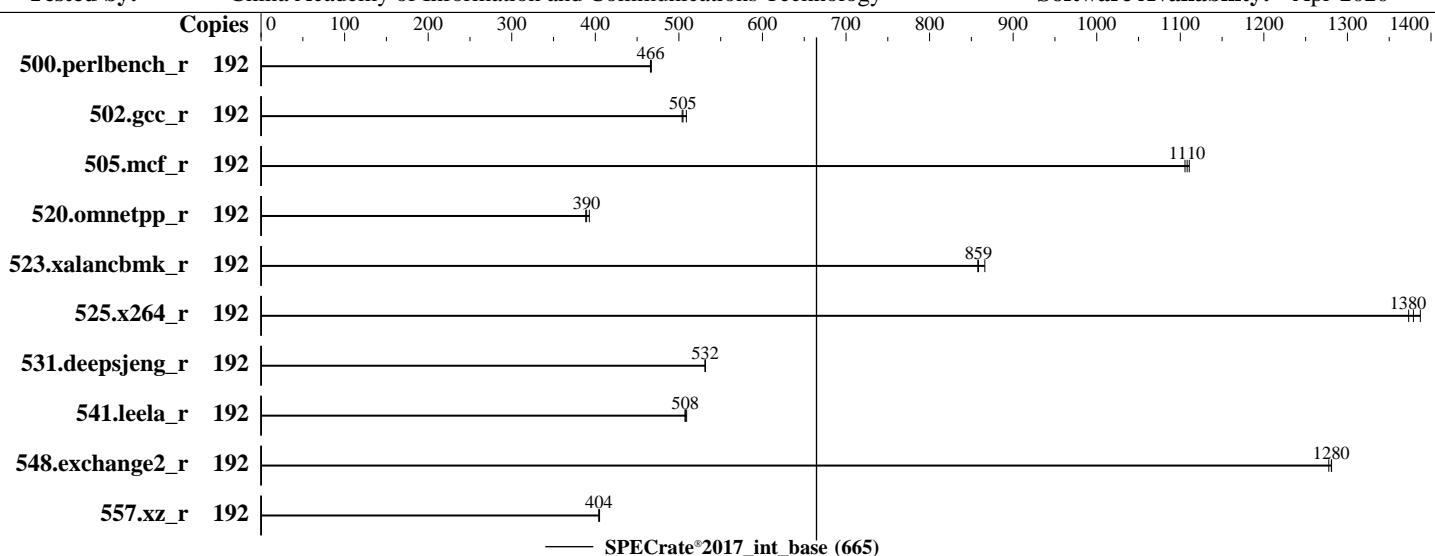

Hardware

CPU Name: Intel Xeon Platinum 8268
 Max MHz: 3900
 Nominal: 2900
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 4.12.14-94.41-default
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 6.83 released Jun-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 665

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	656	466	654	467	655	466							
502.gcc_r	192	538	505	534	509	540	504							
505.mcf_r	192	280	1110	281	1110	279	1110							
520.omnetpp_r	192	647	390	648	389	641	393							
523.xalancbmk_r	192	236	859	234	866	236	858							
525.x264_r	192	242	1390	245	1370	244	1380							
531.deepsjeng_r	192	414	532	414	532	414	531							
541.leela_r	192	627	507	626	508	624	509							
548.exchange2_r	192	393	1280	394	1280	393	1280							
557.xz_r	192	513	404	512	405	513	404							

SPECrate®2017_int_base = 665

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64
    :/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32:
    /usr/local/jemalloc32-5.0.1"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 665

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

General Notes

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-mb4p Sat Jan 16 12:11:25 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
```

```
        4 "physical id"s (chips)
```

```
        192 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
```

```
siblings : 48
```

```
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 13 16 17 18 19 20 21 22 25 26 27 28 29
```

```
physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

```
physical 2: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

```
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 665

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

```

CPU(s): 192
On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
Stepping: 7
CPU MHz: 2900.000
CPU max MHz: 3900.0000
CPU min MHz: 1200.0000
BogoMIPS: 5800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,12-14,19,20,96-99,103-105,108-110,115,116
NUMA node1 CPU(s): 4-6,10,11,15-18,21-23,100-102,106,107,111-114,117-119
NUMA node2 CPU(s): 24-27,31,32,36-38,42-44,120-123,127,128,132-134,138-140
NUMA node3 CPU(s): 28-30,33-35,39-41,45-47,124-126,129-131,135-137,141-143
NUMA node4 CPU(s): 48-51,55,56,60-62,66-68,144-147,151,152,156-158,162-164
NUMA node5 CPU(s): 52-54,57-59,63-65,69-71,148-150,153-155,159-161,165-167
NUMA node6 CPU(s): 72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s): 76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmpf perf_pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpq rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 12 13 14 19 20 96 97 98 99 103 104 105 108 109 110 115 116
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 665

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Date: Jan-2021

Test Sponsor: China Academy of Information and Communications Technology

Hardware Availability: Feb-2020

Tested by: China Academy of Information and Communications Technology

Software Availability: Apr-2020

Platform Notes (Continued)

```
node 0 size: 95205 MB
node 0 free: 94812 MB
node 1 cpus: 4 5 6 10 11 15 16 17 18 21 22 23 100 101 102 106 107 111 112 113 114 117
118 119
node 1 size: 96763 MB
node 1 free: 96448 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 120 121 122 123 127 128 132 133 134
138 139 140
node 2 size: 96763 MB
node 2 free: 96330 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 124 125 126 129 130 131 135 136 137
141 142 143
node 3 size: 96763 MB
node 3 free: 96549 MB
node 4 cpus: 48 49 50 51 55 56 60 61 62 66 67 68 144 145 146 147 151 152 156 157 158
162 163 164
node 4 size: 96763 MB
node 4 free: 96529 MB
node 5 cpus: 52 53 54 57 58 59 63 64 65 69 70 71 148 149 150 153 154 155 159 160 161
165 166 167
node 5 size: 96763 MB
node 5 free: 96545 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 96734 MB
node 6 free: 96489 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 96543 MB
node 7 free: 96282 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo
MemTotal: 790835832 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 665

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

uname -a:

```
Linux linux-mb4p 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Jan 16 12:05

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	883G	47G	837G	6%	/

From /sys/devices/virtual/dmi/id

```
BIOS: INSYDE Corp. 6.83 06/29/2019
Vendor: Huawei
Product: CH242 V5
Product Family: Purley
Serial: Huawei
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 665

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

Memory:

48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
| 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_base = 665

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-lld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-lld=gold -qopt-mem-layout-trans=4
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/opt/intel/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.l1l-official-linux64_revB.html
<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.l1l-official-linux64_revB.xml
<http://www.spec.org/cpu2017/flags/CAICT-Platform-Settings-V1.2.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Huawei

(Test Sponsor: China Academy of Information and Communications Technology)

SPECrate®2017_int_base = 665

Huawei CH242 V5 (Intel Xeon Platinum 8268)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6177

Test Sponsor: China Academy of Information and Communications Technology

Tested by: China Academy of Information and Communications Technology

Test Date: Jan-2021

Hardware Availability: Feb-2020

Software Availability: Apr-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2021-01-15 23:11:24-0500.

Report generated on 2021-02-22 13:18:10 by CPU2017 PDF formatter v6255.

Originally published on 2021-02-02.