



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

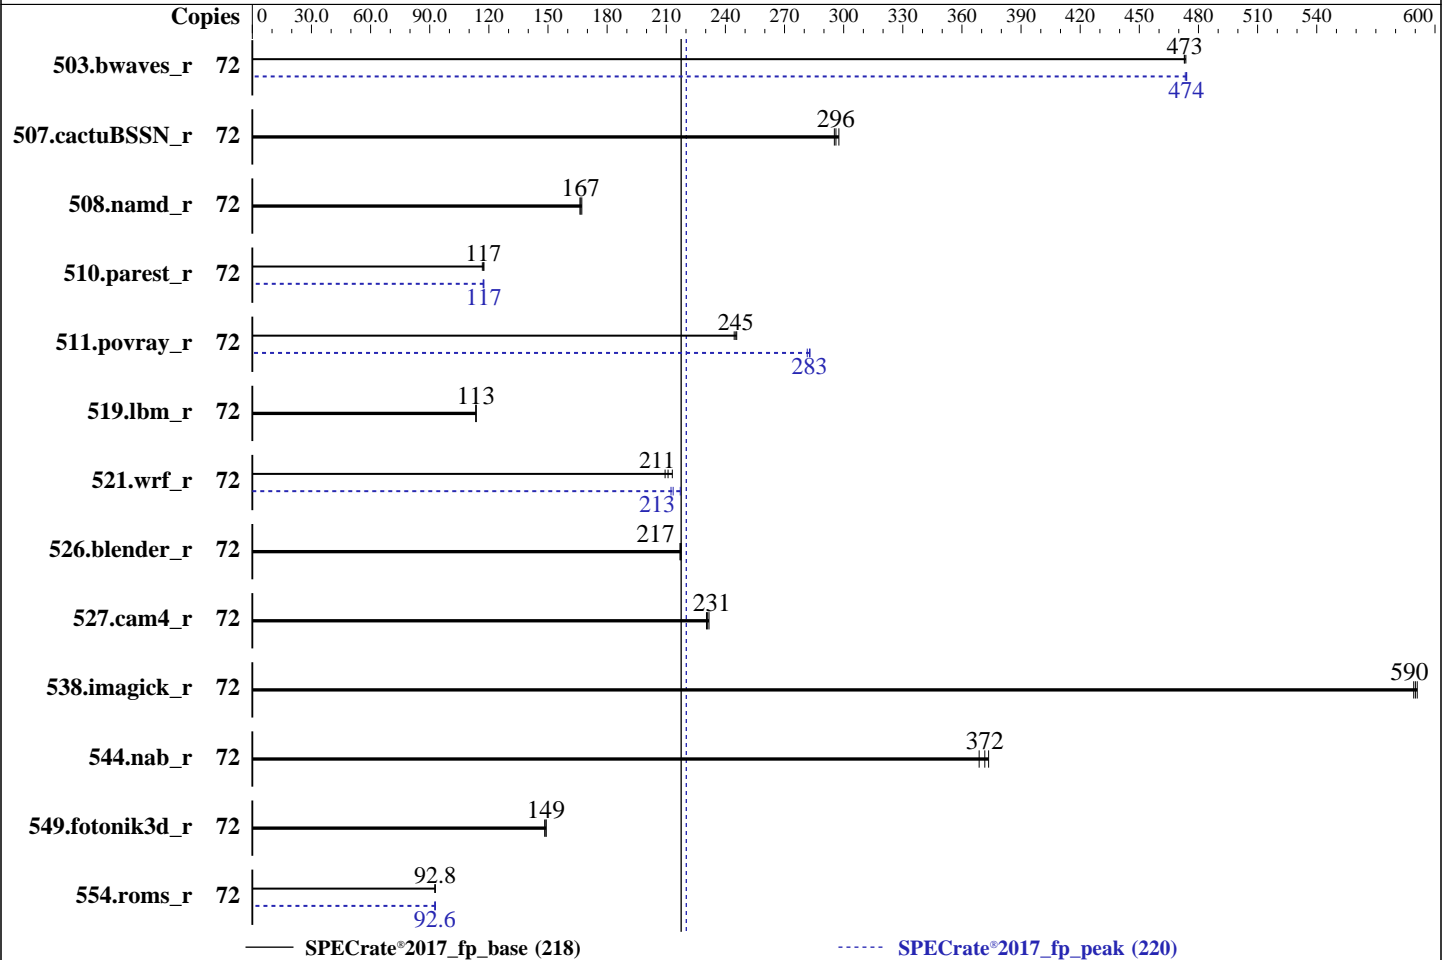

Hardware

CPU Name: Intel Xeon Gold 6240
 Max MHz: 3900
 Nominal: 2600
 Enabled: 36 cores, 2 chips, 2 threads/core
 Orderable: 1,2 (chip)s
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: CentOS Linux release 8.3.2011
 4.18.0-240.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++
 Compiler Build 20200306 for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran
 Compiler Build 20200306 for Linux
 Parallel: No
 Firmware: Version 3.3 released Feb-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	1524	474	1527	473	1526	473	72	1525	473	1523	474	1523	474
507.cactuBSSN_r	72	308	296	306	298	309	295	72	308	296	306	298	309	295
508.namd_r	72	410	167	409	167	412	166	72	410	167	409	167	412	166
510.parest_r	72	1605	117	1614	117	1603	117	72	1604	117	1604	117	1608	117
511.povray_r	72	684	246	685	245	688	244	72	595	283	597	282	594	283
519.lbm_r	72	669	113	669	114	669	113	72	669	113	669	114	669	113
521.wrf_r	72	757	213	765	211	770	209	72	743	217	755	213	759	212
526.blender_r	72	505	217	504	217	504	218	72	505	217	504	217	504	218
527.cam4_r	72	544	232	545	231	547	230	72	544	232	545	231	547	230
538.imagick_r	72	304	589	303	591	303	590	72	304	589	303	591	303	590
544.nab_r	72	324	374	326	372	329	369	72	324	374	326	372	329	369
549.fotonik3d_r	72	1883	149	1892	148	1883	149	72	1883	149	1892	148	1883	149
554.roms_r	72	1233	92.8	1233	92.8	1235	92.6	72	1235	92.6	1232	92.9	1235	92.6

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

General Notes

Binaries compiled on a system with 2x Intel Cascade Lake CPU + 384 GB RAM
memory using Centos 8.2 x86_64
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
`sync; echo 3> /proc/sys/vm/drop_caches`
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the Centos 8.2 x86_64, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC = Enable
Stale AtoS = Disable
IMC Interleaving = 1-way Interleave
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Fri Feb 5 06:22:10 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Platform Notes (Continued)

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               72
On-line CPU(s) list: 0-71
Thread(s) per core:   2
Core(s) per socket:   18
Socket(s):            2
NUMA node(s):        4
Vendor ID:            GenuineIntel
CPU family:           6
Model:               85
Model name:           Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
Stepping:            7
CPU MHz:              3299.952
CPU max MHz:          3900.0000
CPU min MHz:          1000.0000
BogoMIPS:             5200.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             25344K
NUMA node0 CPU(s):   0-2,5,6,9,10,14,15,36-38,41,42,45,46,50,51
NUMA node1 CPU(s):   3,4,7,8,11-13,16,17,39,40,43,44,47-49,52,53
NUMA node2 CPU(s):   18-20,23,24,27,28,32,33,54-56,59,60,63,64,68,69
NUMA node3 CPU(s):   21,22,25,26,29-31,34,35,57,58,61,62,65-67,70,71
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt
clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni md_clear flush_lld arch_capabilities

```

/proc/cpuinfo cache data
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 9 10 14 15 36 37 38 41 42 45 46 50 51

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Platform Notes (Continued)

```

node 0 size: 90820 MB
node 0 free: 85285 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 39 40 43 44 47 48 49 52 53
node 1 size: 92543 MB
node 1 free: 88431 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 54 55 56 59 60 63 64 68 69
node 2 size: 92931 MB
node 2 free: 88098 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 57 58 61 62 65 66 67 70 71
node 3 size: 92057 MB
node 3 free: 87927 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      394853884 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

From /etc/*release* /etc/*version*

```

centos-release: CentOS Linux release 8.3.2011
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.3
os-release:
  NAME="CentOS Linux"
  VERSION="8"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.3.2011
system-release: CentOS Linux release 8.3.2011
system-release-cpe: cpe:/o:centos:centos:8

```

uname -a:

```

Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Fri Sep 25 19:48:47 UTC 2020

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: TSX disabled

run-level 3 Feb 4 22:16

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	372G	83G	289G	23%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:      Tyrone Systems
Product:     Tyrone Camarero DS400TG-48R
Serial:      0123456789

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
4x NO DIMM NO DIMM
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

```

```

BIOS:
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     3.3
BIOS Date:        02/21/2020
BIOS Revision:    5.14

```

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Compiler Version Notes

```
=====
C                | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                  | 544.nab_r(base, peak)
=====
```

```
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++              | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C          | 511.povray_r(peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
=====
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
 (Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DS400TG-48R
 (2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Dec-2020

Compiler Version Notes (Continued)

```
=====
Fortran, C      | 521.wrf_r(peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C      | 521.wrf_r(peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib
-ljemalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
508.namd_r: basepeak = yes
```

```
510.parest_r: -m64 -qnextgen
```

```
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
```

```
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast
```

```
-ffast-math -flto -mfpmath=sse -funroll-loops
```

```
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib
```

```
-ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
```

```
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo
```

```
-no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-multiple-gather-scatter-by-shuffles
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX_revB.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX_revB.xml



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TG-48R

(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_fp_base = 218

SPECrate®2017_fp_peak = 220

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-04 19:52:09-0500.

Report generated on 2021-03-02 15:50:16 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-02.